

ø 37mm Spur Gear Motor **Carbon - Brushed**

MOT-RA37GM12V330R

Our Spur Gear Motors are an inline solution providing ample torque output at various speeds. They are best for intermittent duty operation. With endless performance combinations, we have a fully tailored gear motor solution for you.




View Alternative Solutions!


Specifications		
Gearhead Type:	Spur	
Motor Type:	Carbon - Brushed	
Rated Voltage:	12V DC	
Rated Speed:	330 rpm	
Rated Torque:	2.5 kg.cm	
Rated Current:	1.6 A	

No-Load Speed:	375 rpm (+/- 10%)
No-Load Current:	< 300 mA
Stall Torque:	21 kg.cm
Max. Power:	20 W
Reduction Ratio:	16:1
Termination Style:	Terminals

Dimensions

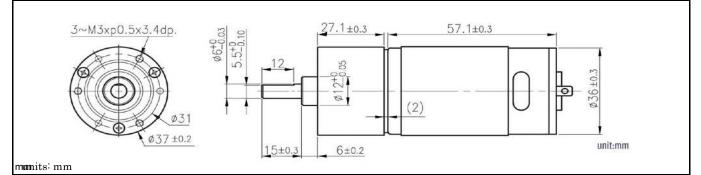

Performance Curve

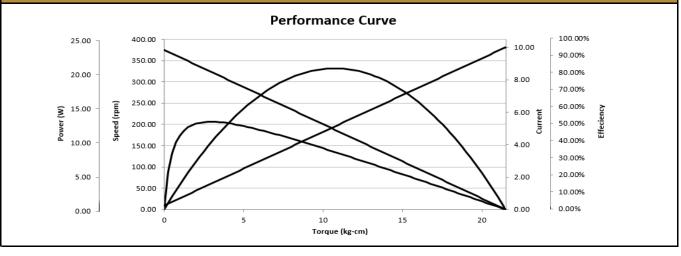



© 2022 ISL Products International Ltd. Specifications subject to change without notice.

ISL Products International Ltd. • 572 Walt Whitman Rd. ,Ste 100 • Melville, NY 11747 • T 516-937-3475 • www.islproducts.com