

MODEL NUMBER  
TRM-2191-M0-BMA-02


NOTES:

1.0 SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC TO 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 0.5 WATTS AT +25°C  
DERATED LINEARLY TO 0 WATTS AT +125°C
- 1.3 MAXIMUM VSWR: 1.10 + 0.01(F GHz)
- 1.4 IMPEDANCE: 50 OHMS NOMINAL
- 1.5 TEMPERATURE RANGE: -65°C TO +125°C

2.0 MATERIAL & FINISH:


- 2.1 BODY AND END PLUG: PASSIVATED STAINLESS STEEL
- 2.2 DIELECTRIC: PTFE (TEFLON)
- 2.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 2.4 O-RING: SILICONE RUBBER

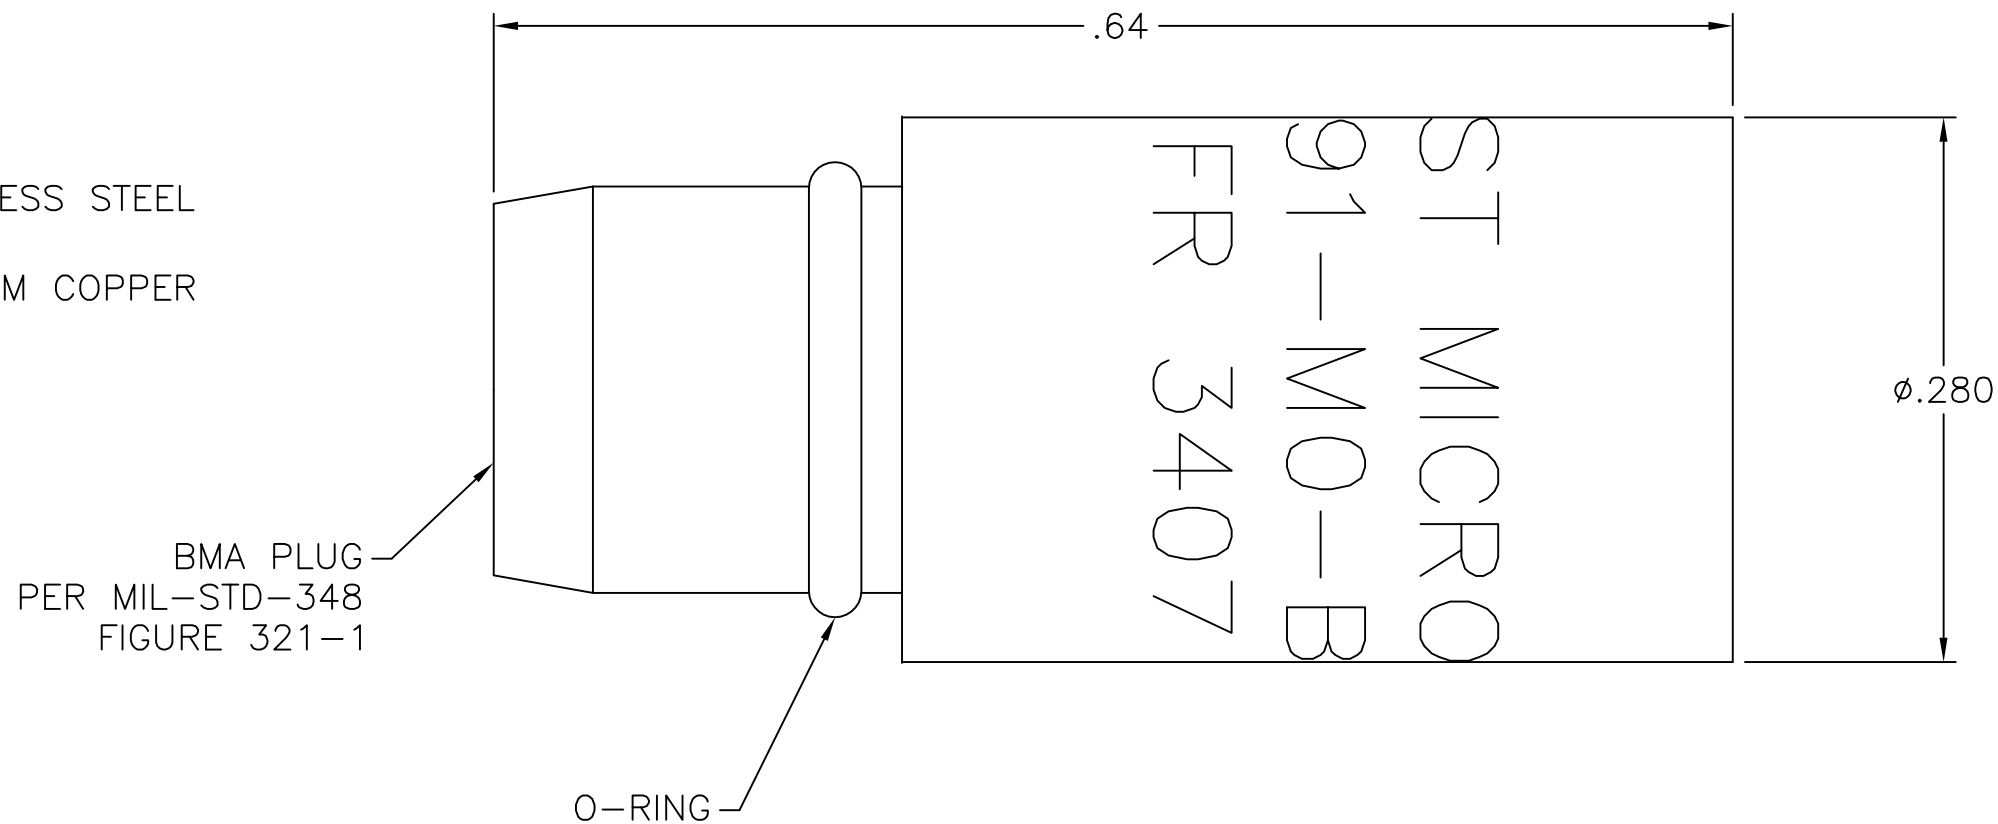

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  
 3 PLACE DECIMALS ±.005  
 2 PLACE DECIMALS ±.02  
 FRACTIONS ±1/64  
 PARALLELITY: T.I.R. \_\_\_\_\_  
 FLATNESS: T.I.R. \_\_\_\_\_  
 CONCENTRICITY: T.I.R. \_\_\_\_\_  
 ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE  
**34078** *MIDWEST MICROWAVE*

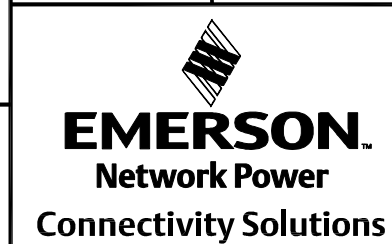

TITLE  
TERMINATION – BMA MALE  
OUTLINE DRAWING

DRAWN/DATE  
C. WALLACE  
1/27/14

ENG./DATE  
J. KEREKES  
1/3/14

CHECKED/DATE  
J. KEREKES  
1/28/14

APPROVED/DATE  
J. KEREKES  
1/28/14

DRAWING NUMBER  
TRM-2191-M0-BMA-02-01

REV.  
D

SCALE: 10:1 SHEET 1 of 1

REV.	DESCRIPTION	DATE
-	RELEASED	4/25/97
A	ECN 16724	6/18/98
A1	ADDED TITLEBLOCK	11/14/05
C	ECO 23176	1/5/11
D	ECO 24974	1/3/14