
















# Products:


for Optical Inspection, Assembly and Field Services



# New Products














# **Table of Contents**



iLoupe



i360



iGauge



Video Inspection Systems



Microscopes



Illumination



CCD/CMOS Cameras



Stands & Mounts



Shop & Pocket Microscopes



Loupes & Magnifiers



Magnifying Lamps & Task Lights



**Tool Kits** 



Pliers & Cutters



Tweezers



Screwdrivers



Alignment Tools



Knives & Blades



Scissors



Crimping Tools & Wire Strippers



Soldering/Desoldering Accessories



# About AVEN

With a product line that features more than 750 tools for optical inspection and precision assembly, Aven, Inc. has made a name for itself as a leading precision technology provider.

When Aven was founded in 1983, our objective focused on the importing and wholesaling of specialty tools. As the business evolved, we expanded our product portfolio to include more high technology tools, thus allowing us to engage in new market segments.

In 1997, Aven underwent its first progression, shifting from traditional workbench tools to industrial electronics supplies. We then turned our focus to precision tools for optical inspection and precision assembly.

Today, Aven's product line includes stationary and portable microscopes, video inspection systems, specialty high-resolution digital and video cameras, lenses, illuminated magnifiers, software for image analysis and tools for precision assembly.

# The AVEN Advantage

While we offer a broad product line of optical inspection equipment components, Aven's true value to customers is realized in our positioning as a full-service technology provider.

As a result of years of comprehensive research and development, Aven has expanded its expertise in the realm of design and customized configuration of advanced video inspection systems. Our solution-based experts possess the ability to recommend and create complete optical systems according to customer's needs and budgets. We also develop new products based on the specifications of our customers.

To form a clearer understanding of our customers and their needs, Aven's specialists make on-site visits to evaluate client's testing and/or quality control stations. Based on the findings, we are able to recommend application improvements and demonstrate the latest advances in testing equipment technology.

A highly experienced sales staff and our diverse and extensive product mix allow us to meet the needs of the optical measurement and electronic equipment markets. Aven also provides a variety of ancillary services such as product assembly, custom parts and tooling, and distribution, all of which are coordinated from our Michigan headquarters.

# **iSeries**

From the world's first compact portable microscope to tools that are as simple as "plug and play," Aven's iSeries line of digital microscope technology offers a variety of functions and capabilities that are applicable to a number of industries.

The iSeries product line includes:

#### **iLo**upe

The world's first compact portable field microscope/camera combination with zoom capability of up to 150x.

#### i360


A 3-D microscope featuring enhanced viewing capabilities, including a 360-degree rotational view and oblique viewing angles up to 55 degrees.

#### i**G**auge

Video imaging and measurement software that enables the user to measure, annotate and analyze images with just a few clicks.





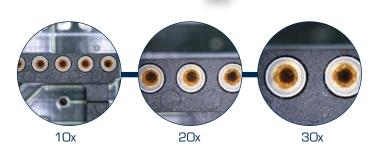



- World's first compact portable field microscope, available anytime and anywhere
  - 2 in 1 device. Standard Digital Camera & a High Power Microscope
    - **Built in Adjustable LED Lighting**
    - High Resolution 7 mega-pixel Canon Camera
  - 10x, 20x and 30x objective lenses available giving a magnification range of 10x to 150x
- **Cost Effective Offering with Powerful Functions**

With the 10x objective lens: 10x to 60x With the 20x objective lens: 20x to 100x With the 30x objective lens: 30x to 150x

The first compact portable field microscope

utilizes a digital camera with a patented module and specially designed lenses with built in high intensity adjustable LED Lights.

The iLoupe can clearly capture objects from 6mm to 10 microns. This 2 in 1 device allows you to quickly interchange between a

standard digital camera and a microscope. You can now carry a portable field microscope and a digital camera in your


pocket with ease. Three objective lenses are available to meet a variety of different applications. Using the optical and digital

zoom range of the camera the following

magnification ranges are produced:

The iLoupe is available in Starter Pack and Pro Pack Versions. The iLoupe Starter Pack includes the Canon Camera with the Adapter Ring, Module and a 10x-60x Objective Lens. The iLoupe ProPack includes the Canon Camera with the Adapter Ring, Module and three objective lenses (10x-60x), (20x-100x) and (30x-150x). Both the Starter Pack and Pro Pack are supplied in a Plastic Carrying Case.

### **Applications**

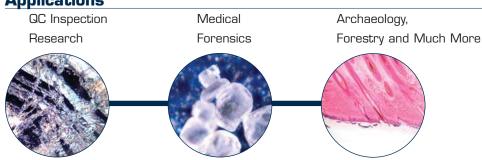

Visit www.aveninc.com to see more images taken with the iLoupe.

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

# Loune Accessories



26700-506



# Specifications

|                                   | iLoupe Starter Pack                        | iLoupe Pro Pack |  |  |
|-----------------------------------|--|-----------------|--|--|
| Objective Lenses included         | 10x, 20x, and 30                           |                 |  |  |
| Magnification Range               | 10x -60x                                   | 10x-150x        |  |  |
| Field of View                     | 10x: 16x12mm, 20x: 9x6.5mm, 30x: 5.7x4.5mm |                 |  |  |
| Lens Design                       | Schott No-Lead Optical Grade Glass         |                 |  |  |
| Coating                           | Multi-Layer Anti-Reflective Coating        |                 |  |  |
| Built in Dimmable<br>Illumination | 4 White LED Lights                         |                 |  |  |
| Batteries                         | Two Li-ion Rechargeable Batteries Included |                 |  |  |



Loupe Stand 26700-505

| Order #      | Description                                  |
|--------------|--|
| 26700-5015   | iLoupe Starter Pack w/ Plastic Carrying Case |
| 26700-501P   | iLoupe Pro Pack w/ Plastic Carrying Case     |
| 26700-505    | iLoupe Stand                                 |
| 26700-506    | iLoupe Carrying Case                         |
| 26700-501-10 | Replacement Lens 10x-60x                     |
| 26700-501-20 | Replacement Lens 20x-100x                    |
| 26700-501-30 | Replacement Lens 30x-150x                    |





- 3D 360 degree rotational view with a 45 degree oblique viewing angle.
  - Zoom 50x-300x with great depth of field
  - Built in LED lighting with intensity control
  - Rotate clockwise or counter clockwise
- Ideal for SMT, Semiconductor IC, Medical Devices,
  Research and Failure Analysis

i360 3D Microscope is designed to give you a 3D perspective with rotation to your inspection process. The user can now view the specimen from all angles without having to move it. This helps reduce evaluation times and improves the QC process.

i360 also comes with our optional PC Link software that allows for image capture and measurement. It can also be connected directly to a PC with our optional USB Camera. Our USB Camera comes with our Infinity Analyze Imaging Software. Infinity analyze allows you to quickly and easily process images which can be entered into an archive application or saved in a variety of formats. Measurements and annotations are easy to perform, highly reproducible and can be customized to your needs.

i360 standard version comes with a 50x-300x lens with a 45 degree oblique viewer, high resolution analog color CCD Camera with BNC and S-Video Outputs, Control Box for controlling the LED light intensity, rotation (i.e. counter clockwise or clockwise), and rotational speed, 15" color flat panel monitor, and stand with focusing control. All cables and adapters are also included.

# 1360 Optional Accessories

- USB Cameras with 1.4 and 2.0 megapixel resolution
- USB Video Link with Software for image capture, processing and archiving



**i360 Dimensions:** Base - 13"x13" Height - 16 1/4"


# Specifications

| Magnification Range | 50x-300x                   |
|---------------------|----------------------------|
| Lighting            | LED with Intensity Control |
| Camera              | 1/3" CCD Color Camera      |
| Working Distance    | 55.5mm                     |
|                     |                            |
| Depth of Field      | 8mm to 1.2mm               |

| Order #      | Description   |
|--------------|---|
| 26700-106-10 | <b>i360 3D Microscope</b> with 45 degree Viewer, 1/3" CCD Color Camera, Controller, Stand with Focus Control, and 15" Flat Panel Color Monitor.               |
| 26700-106-14 | <b>i360 3D Microscope</b> with 45 Degree Viewer, USB 1.4 Mega<br>Pixel Camera with Infinity Analyze Imaging Software, Controller,<br>Stand with Focus Control |
| 26700-106-20 | Same as 26700-106-14 USB 1.4 Megapixel Camera replaced with our USB 2.0 Megapixel Camera  |
| 26100-403    | USB Video Link with Software for Image Capture, Processing and Archiving for use with our Analog CCD Camera. Basic measurement functions are included.        |



# iGauge Video Imaging and Measurement Software

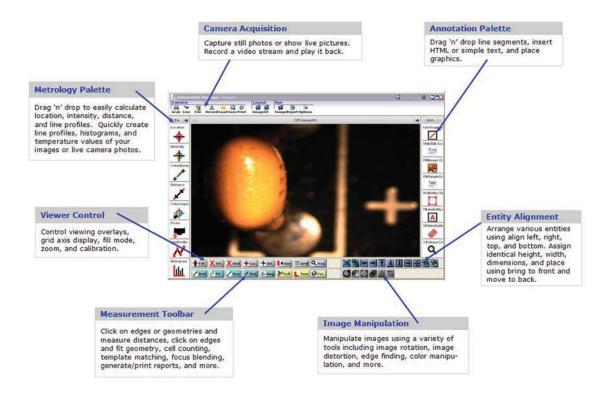

iGauge allows you to measure, annotate and analyze your images with just a few clicks. iGauge will dramatically increase the capability of any video camera based system. Test Drive iGauge by downloading a 30 day trial version from our website www.aveninc.com

#### SIMPLE AND EASY TO USE

#### Features:

- Image Capture, Record & Playback
- Viewing Tools
- Toolbar Geometry/Metrology
- Geometry Tools
- Annotation Tools
- Metrology Tools
- Image Processing Tools
- Reporting Tools
- Image Manipulation Tools
- Intuitive Interface

26100-405 iGauge Video Software

# **Video Inspection Systems**

Aven's Video Inspection Systems can be used for several applications, including inspection, defect analysis and quality assurance. Our products feature a wide range of lenses, cameras, lighting options, video capture cards and stands to enable us in creating a custom solution for you.

This product line includes:

#### Aven Micro Zoom Systems

Designed for high magnification and high resolution applications.

# Aven Macro Zoom Video Inspection Systems

Designed for large field of view applications.

Aven Micro and Macro Systems now feature our NEW **miniVue** high resolution color camera with instant image capture and a built-in 2" high resolution LCD Screen.

Create Your Own Custom System @ www.aveninc.com





# VI Systems

# Aven Micro Zoom Video Inspection System VIS-6000



Create Your Own Custom
System @ www.aveninc.com

- Designed for high magnification and high resolution applications
  - Modular design allows you to vary magnification, field of view, and working distance
    - Easily upgradeable
    - Magnification Range: 10x-67x (with 0.5x adapter and auxiliary lens) (20x-134x with the 0.5x lens removed)
    - Working Distance: 143mm (5.6") to 187mm (7.36") (81-93mm with the 0.5x lens removed)
  - Field of View: 34.32mm (1.35") to 5.32mm (0.2") (17.16-2.67mm with the 0.5x lens removed)
- miniVue 3.1 megapixel camera with instant image capture on built-in SD card and 2" high resolution LCD screen.

  Connect to a PC via USB, as well as to a larger LCD Monitor for detailed viewing

Description

26700-102-00

Order #

**VIS 6000** with Zoom 6000 lens, 0.5x adapter tube and auxilary lens, miniVue Camera and 150 watt FOI with Ring Light. Mounted on the Ergo Stand with 11"x18" base. With our miniVue camera, images can be saved directly onto a SD Card.

#### **Applications**

Inspection of a wide range of objects such as integrated circuits, solder joints, surface analysis, quality control and laboratory inspection.

#### **Customization**

A variety of adapters & auxiliary lens, cameras, lighting options, video capture cards, and stands are available to provide a custom solution.

#### **Magnification Range**

2x to 2735x possible.
Call for more information.

#### **High Accuracy Measurement**

Detented Lenses are available for high accuracy measurements.

#### 12x Zoom Lenses

For customers requiring the highest combination of zoom range and resolution. Visit www.aveninc.com for more information.

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com



Micro Zoom Video Inspection System on Articulating Arm 26700-102-15



Micro Zoom Video Inspection System on Boom Stand 2700-102-10

# Specifications

| Lens Attachment | Mag/Field of View . (mm) | .5x Adapte |       | 1x Adapter |      | 2x /  | Adapter | 5x / | Adapter |
|-----------------|--------------------------|------------|-------|------------|------|-------|---------|------|---------|
|                 |                          | Low        | High  | Low        | High | Low   | High    | Low  | High    |
| 0.25x           | Magnification            | 5x         | 33x   | 10x        | 67x  | 21x   | 134x    | 52x  | 329x    |
|                 | Field of View            | 68.64      | 10.64 | 34.32      | 5.32 | 17.16 | 2.66    | 6.88 | 1.08    |
| 0.5x            | Magnification            | 10x        | 67x   | 21x        | 133x | 41x   | 267x    | 104x | 671x    |
|                 | Field of View            | 34.32      | 5.32  | 17.16      | 2.67 | 8.58  | 1.33    | 3.43 | 0.53    |
| 0.75x           | Magnification            | 16x        | 100x  | 31x        | 200x | 62x   | 400x    | 155x | 1016×   |
|                 | Field of View            | 17.16      | 2.67  | 8.58       | 1.33 | 4.29  | 0.67    | 1.72 | 0.27    |
| None            | Magnification            | 21x        | 133x  | 41x        | 267x | 83x   | 531x    | 207x | 1317×   |
|                 | Field of View            | 17.16      | 2.67  | 8.58       | 1.33 | 4.29  | 0.67    | 1.72 | 0.27    |
| 1.5x            | Magnification            | 31x        | 200x  | 62x        | 400x | 124x  | 808×    | 312x | 1976×   |
|                 | Field of View            | 11.43      | 1.78  | 5.72       | 0.89 | 2.86  | 0.44    | 1.14 | 0.18    |
| 2x              | Magnification            | 41x        | 267x  | 83x        | 531x | 165x  | 1078x   | 413x | 2735    |
|                 | Field of View            | 8.58       | 1.33  | 4.29       | 0.67 | 2.15  | 0.33    | 0.86 | 0.13    |

<sup>\*</sup> Note magnification data calculated based on 1/3" CCD camera and a 15" LCD Monitor.

| Ordar #      | Description   |
|--------------|---|
| 26700-102-10 | VIS 6000 – Same system as 2700-102-00 but mounted on a Dual Arm Ball Bearing Stand with a 1.3 Megapixel USB Camera with Image Capture and Measurement Software. Monitor not Included. |
| 26700-102-15 | VIS 6000 - Same system as 2700-102-10 but mounted on an Articulating Arm with Mounting Clamp.  Monitor not Included.  |

<sup>\*</sup> Systems 26700-102-10 and 26700-102-15 can also be ordered with our new miniVue Camera. Go to www.aveninc.com to configure a system.





# Aven Macro Zoom Video Inspection System

Create Your Own Custom
System @ www.aveninc.com

- Designed for Large Field of View Applications
  - O 6x Macro Zoom Lens with Adjustable Iris and Close-Up Lens
    - Magnification: Up to 71x with a 15" Monitor Working Distance 5"
    - Field of View: 291.6 to 213.8mm (11" to 8.4") (at 48" working distance allows Inspection of large samples.)
    - System available with High Resolution USB Digital Cameras with Software
  - Focal Range: 18mm 108mm
- Working Distance: 5" 12" with Close Up Lens, 24" to Infinity without close-up lens

#### **Applications**

Quality Assurance, biomedical imaging or assembly applications where an easy to view, sharp and true-to-life magnified image is required.

#### **Customization**

A variety of adapters & auxiliary lens, cameras, lighting options, video capture cards, and stands are available to provide a custom solution. See chart on next page for more information on magnification and FOV ranges possible.



Macro Zoom Video Inspection System on Boom Stand 2700-103-00

# Specifications

### w/Close-Up Lens

| Working Distance | FOV(mm) @ Low Mag. | FOV(mm) @ High Mag. | Magification Range |
|------------------|--------------------|---------------------|--------------------|
| 5″               | 25.9x19.4          | 4.3x3.2             | 12x - 71x          |
| 7"               | 38.9x29.2          | 6.5x4.9             | 8x - 47x           |
| 8″               | 45.5x34            | 7.6x5.7             | 7x - 40x           |
| 10"              | 58.3×43.7          | 9.7x7.3             | 5x - 31x           |

### w/o Close-Up Lans

| Working Distance | Working Distance FOV(mm) @ Low Mag. |           | Magification Range |
|------------------|-------------------------------------|-----------|--------------------|
| 24"              | 136.1×97.2                          | 22.7x21.1 | 2x - 13x           |
| 36"              | 213.8x155.5                         | 35.6x25.9 | 1.5x - 9x          |
| 48"              | 291.6x213.8                         | 48.6x35.6 | 1x - 6x            |

| Ordar #      | Description   |
|--------------|---|
| 26700-103-00 | <b>6x Macro Lens</b> mounted on a SS Dual Arm Ball Bearing Boom Stand, 1/3" CCD Camera, 15" LCD Monitor, PC Link Device and Software for Image Capture. |

<sup>\*</sup> Please note, in most applications additional illumination is not required for this lens system.

# **Stereo Zoom Microscopes**

Our stereo zoom and stereo microscopes are manufactured exclusively for Aven by Carton Optical of Japan. Carton Optical has been manufacturing microscopes for over 40 years. Their microscopes have gained a reputation for providing the very best in optical performance, durability, and versatility. With a diverse selection of bodies, stands, and lighting techniques a system can be configured to fit any application.

#### To configure your system select:

- 1. The microscope body that meets your magnification, field of view and working distance requirements. Note with a combination of eyepieces and auxiliary lens you can tailor a system to meet your requirements.
- 2. Focusing Mount.
- 3. Stand (please take into account the working distance and the height of the stand).
- 4. Illumination Fiber Optic, Fluorescent
- 5. Camera and or adapter if you are using a trinocular body.
- 6. Monitor if necessary.

#### All stereo zoom bodies feature:

- Crisp high resolution precision optics that provide an erect, non-reversed stereoscopic image.
- Binocular eyepieces inclined at 45 degrees for fatigue free viewing.
- Diopter adjustments on both eyepieces.
- Interpupilary distance adjustment 52mm to 75mm.
- Body can be rotated a full 360 degrees and locked in any position.
- Trinocular zoom bodies feature a beamsplitter. When engaged 100% of the light from the left optical path is directed to the phototube. The image can still be viewed through the right eye tube.

Configure Your Own Custom Microscope System @ www.aveninc.com



Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

# SPZ-50 Series

Outstandingly large zoom ratio 7.46:1-best zoom ration in this class

Magnification range: 6.7x to 50x

Field of View 34.3mm to 3.6mm (1.35" to 0.14")

Working distance 108mm (4.25") - the best in this class

Magnification range of 2.25x to 200x with optional lenses

17mm (0.67") high eye point wide field 10x eyepieces (field number 23) for comfortable viewing even for operators with eyeglasses.

Trinocular version has diopter adjustment on vertical tube for fine focusing of image

\* Note specifications mentioned above are with Wide Field 10x eyepieces.

# Optical Data

| Eyepiece       | DHW10X (F.N. 23) |             |                  |             |            |  |
|----------------|------------------|-------------|------------------|-------------|------------|--|
| Auxiliary Lens | Nil              | w/0.5x      | w/0.75x          | w/1.6x      | w/2x       |  |
| Magnifications | 6.7x-50x         | 3.35x-25x   | 5x-37.5x         | 10.72x-80x  | 13.4x-100x |  |
| Working Dist.  | 108mm            | 240mm       | 132mm            | 50mm        | 41mm       |  |
| Field of View  | 34.3-4.6mm       | 68.9-9.2mm  | 45.7-6.1mm       | 21.4-2.8mm  | 17.1-2.3mm |  |
| Eyepiece       |                  | DI          | HW15X (F.N.15)   |             |            |  |
| Auxiliary Lens | Nil              | w/0.5x      | w/0.75x          | w/1.6x      | w/2x       |  |
| Magnifications | 10.05x-75x       | 5.02x-37.5x | 7.53x-56.25x     | 16.08x-120x | 20.1x-150x |  |
| Working Dist.  | 108mm            | 240mm       | 132mm            | 50mm        | 41mm       |  |
| Field of View  | 22.3-3mm         | 44.7-6mm    | 29.8-4mm         | 16-1.8mm    | 11.1-1.5mm |  |
| Eyepiece       |                  | DH          | W20X (F.N. 11.4) |             |            |  |
| Auxiliary Lens | Nil              | w/0.5x      | w/0.75x          | w/1.6x      | w/2x       |  |
| Magnifications | 13.4x-100x       | 6.7x-50x    | 10.05x-75x       | 21.44x-160x | 26.8x-200x |  |
| Working Dist.  | 108mm            | 240mm       | 132mm            | 50mm        | 41mm       |  |
| Field of View  | 17-2.2mm         | 34-4.5mm    | 22.6-3mm         | 10.6-1.4mm  | 8.5-1.1mm  |  |

| SPZT-50 | SPZT-50 Trinocular |  |
|---------|--------------------|--|
| SPZ-50  | SPZ-50 Binocular   |  |
| Order # | Description        |  |

[BEST SELLER]



SPZ-50

Binocular stereo zoom body with 10x eyepieces, rubber eye guards and dust cover

#### [BEST SELLER]



Trinocular stereo zoom body with 10x eyepieces, rubber eye guards and dust cover



# DSZ-44 Series

16

Stereo Zoom Microscopes



DSZ-44

Binocular stereo zoom body with 10x wide field eyepieces, Rubber eye guards and dust cover

Zoom Ratio of 4.4:1

Magnification range: 10x to 44x

Field of View of 23mm to 5.3mm (0.90" to 0.20")

Working distance 90mm (3.54")

Magnification range of 2.5x to140.8x with optional lenses

Wide Field 10x Eyepieces (field number 23)

\* Note specifications mentioned above are with Wide Field 10x eyepieces.



Trinocular stereo zoom body with 10x wide field eyepieces, Rubber eye guards and dust cover

#### Optical Data

| Eyepiece       | DSW5X (F.N. 22.5) |            |              |            |  |  |
|----------------|-------------------|------------|--------------|------------|--|--|
| Auxiliary Lens | Nil               | w/0.5x     | w/0.75x      | w/1.6x     |  |  |
| Magnifications | 5x-22x            | 2.5x-11x   | 3.75x-16.5x  | 8x-35.2x   |  |  |
| Working Dist.  | 90mm              | 150mm      | 105mm        | 45mm       |  |  |
| Field of View  | 22.5-5.1mm        | 45-10.2mm  | 30-6.8mm     | 14-3.1 mm  |  |  |
| Eyepiece       |                   | DSW10X     | (F.N. 23)    |            |  |  |
| Auxiliary Lens | Nil               | w/0.5x     | w/0.75x      | w/1.6x     |  |  |
| Magnifications | 10x-44x           | 5x-22x     | 7.5x-33x     | 16x-70.4x  |  |  |
| Working Dist.  | 90mm              | 150mm      | 105mm        | 45mm       |  |  |
| Field of View  | 23-5.2mm          | 46-10.4mm  | 30.6-6.9mm   | 14.3-3.2mm |  |  |
| Eyepiece       |                   | DSW15X     | (F.N. 15)    |            |  |  |
| Auxiliary Lens | Nil               | w/0.5x     | w/0.75x      | w/1.6x     |  |  |
| Magnifications | 15x-66x           | 7.5X-33X   | 11.25X-49.5X | 24X-105.6X |  |  |
| Working Dist.  | 90mm              | 150mm      | 105mm        | 45mm       |  |  |
| Field of View  | 15-3.4mm          | 30-6.8mm   | 20-49.5mm    | 9.3-2.1mm  |  |  |
| Eyepiece       |                   | DSW20X     | (F.N. 11.4)  |            |  |  |
| Auxiliary Lens | Nil               | w/0.5x     | w/0.75x      | w/1.6x     |  |  |
| Magnifications | 20x-88x           | 10x-44x    | 15x-66x      | 32x-140.8x |  |  |
| Working Dist.  | 90mm              | 150mm      | 105mm        | 45mm       |  |  |
| Field of View  | 11.4-2.5mm        | 22.8-5.1mm | 15.2-3.45mm  | 7.1-1.6mm  |  |  |

| Order # | Description        |
|---------|--------------------|
| DSZ-44  | DSZ-44 Binocular   |
| DSZT-44 | DSZT-44 Trinocular |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

# DSZ-70 Series

For high magnification applications

Zoom Ratio of 3.5: 1

Magnification range: 20x to 70x

Field of View of 10mm to 2.8mm (0.39" to 0.11")

Working distance 80mm (3.15")

Magnification range of 5x to 224x with optional lenses

Wide Field 10x Eyepieces (field number 20)



#### DSZ-70

Binocular stereo zoom body with 10x wide field eyepieces, Rubber eye guards and dust cover



#### DSZT-70

Trinocular stereo zoom body with 10x wide field eyepieces, Rubber eye guards and dust cover

#### **Optical Data**

| Eyepiece       | DSW5XZ (F.N. 20)   |            |              |           |
|----------------|--------------------|------------|--------------|-----------|
| Auxiliary Lens | Nil                | w/0.5x     | w/0.75x      | w/1.6x    |
| Magnifications | 10x-35x            | 5x-17.5x   | 7.5x-26.25x  | 16x-56x   |
| Working Dist.  | 80mm               | 120mm      | 85mm         | 41mm      |
| Field of View  | 10-2.9mm           | 20-5.7mm   | 13.3-3.8mm   | 6.2-1.7mm |
| Eyepiece       |                    | DSW10X     | Z (F.N. 20)  |           |
| Auxiliary Lens | Nil                | w/0.5x     | w/0.75x      | w/1.6x    |
| Magnifications | 20x-70x            | 10x-35x    | 15x-52.5x    | 32x-112x  |
| Working Dist.  | 80mm               | 120mm      | 85mm         | 41mm      |
| Field of View  | 10-2.8mm           | 20-5.7mm   | 13.3-3.8mm   | 6.2-1.7mm |
| Eyepiece       | DSW15X (F.N. 15)   |            |              |           |
| Auxiliary Lens | Nil                | w/0.5x     | w/0.75x      | w/1.6x    |
| Magnifications | 30x-105x           | 15x-52.5x  | 22.5x-78.75x | 48x-168x  |
| Working Dist.  | 80mm               | 120mm      | 85mm         | 41mm      |
| Field of View  | 7.5-2.1mm          | 15-4.2mm   | 10-2.8mm     | 4.6-1.3mm |
| Eyepiece       | DSW20X (F.N. 11.4) |            |              |           |
| Auxiliary Lens | Nil                | w/0.5x     | w/0.75x      | w/1.6x    |
| Magnifications | 40x-140x           | 20x-70x    | 30x-105x     | 64x-224x  |
| Working Dist.  | 80mm               | 120mm      | 85mm         | 41mm      |
| Field of View  | 5.7-1.6mm          | 11.4-3.2mm | 7.6-2.1mm    | 3.5-1 mm  |

| Order # | Description        |
|---------|--------------------|
| DSZ-70  | DSZ-70 Binocular   |
| DSZT-70 | DSZT-70 Trinocular |

<sup>\*</sup> Note specifications mentioned above are with Wide Field 10x eyepieces.



Configure Your Own Custom Microscope System @ www.aveninc.com

18



Dual Magnification of 6x & 20x, 10x & 20x, 10x & 30x and 20x & 40x bodies available

Single Magnification of 10x or 20x bodies available

10x Wide Field Eyepieces standard (field number 23)

Field of View: 38.3mm (1.50") at 6x, 23mm (0.91") at 10x, 11.5mm (0.45") at 20x, 7.6mm (0.30") at 30x and 5.7mm (0.22") at 40x

| Order # | Description                                     |
|---------|---|
| NSW-1   | Single 10x Stereo Body                          |
| NSW-2   | Single 20x Stereo Body                          |
| NSW-20  | <b>Dual Magnification</b> 10x & 20x Stereo Body |
| NSW-30  | <b>Dual Magnification</b> 10x & 30x Stereo Body |
| NSW-40  | <b>Dual Magnification</b> 20x & 40x Stereo Body |
| NSW-620 | Dual Magnification 6x & 20x Stereo Body**       |

Each Body comes with Wide Field 10x eyepieces Rubber Eye Guards and dust cover



Large stage to accommodate large parts (220mmx284mm). A long life and low temperature 9W fluorescent lamp is used for the built-in incident light. Magnification: 10x & 30x

Order #

Description

26800B-361 NSW-30PF Microscope



Features a large stage to accommodate large parts (220mmx284mm). For illumination, we recommend our fluorescent ring lights or our fiber optic illuminator with our annular ring light. If an auxiliary lens is not used a ring light adapter will be required to install the fluorescent ring light or the annular ring light.

Magnification: 10x & 30x

Order #

Description

26800B-362 | NSW-30P Microscope

<sup>\*\*</sup> NSW-620 will not work with stand T

# Stereo Zoom Microscopes

# **Preconfigured Systems**

Configure a system online at www.aven

can configure a system to match your application.

Configure a system online at www.aveninc.com

Shown below are some of our popular systems or you

#### Stand Systems



Order #

26800B-305

#### Model DSZ-44P

DSZ-44 Stereo Zoom Binocular Microscope 10x to 44x, with 10x eyepieces. Mounted on Stand P. For illumination we recommend fluorescent or LED Ring Lights or our fiber optic illuminators.

Stand base is 220mm x 284mm



Order #

26800B-371

#### Model SPZ-50PFM

SPZ-50 Stereo Zoom Binocular Microscope 6.7x to 50x, with 10x eyepieces. Mounted on Stand PFM. Has built in 9W Fluorescent ring light.

Stand base is 220mm x 284mm

### Boom Stand Systems



Order #

26800B-370

#### SPZ-50 Stereo Zoom Binocular Microscope

6.7x to 50x, 10x eyepieces, 0.5x lens, Ring Light Adapter, and LED Ring Light with Intensity Control. Mounted on our Double Arm Stainless Steel Ball Bearing Boom Stand.



Order #

26800B-369

#### SPZT-50 Stereo Zoom Trinocular Microscope

6.7x to 50x 10x eyepieces, 0.5x lens, Ring Light Adapter, Fiber Optic Illuminator with Annular Ring Light, USB Infinity 1, 1.3 Megapixel Camera with Infinity Image Analysis Software. Mounted on our Double Arm Stainless Steel Ball Bearing Stand. Computer not included.



# **Preconfigured Systems**

Shown below are some of our popular systems or you can configure a system to match your application.

Configure a system online at www.aveninc.com

#### Examples of other Popular Systems

Systems shown below can be ordered using individual part #s. Call us, we can help configure a system to meet your requirements



Stereo Zoom Microscopes



Trinocular Scope on an Articulating Arm with an 17"x20" base and Fiber Optic Illumination.



Binocular Scope on Single Arm Boom Stand with Fiber Optic Illumination.



Trinocular Scope Double Arm Ball Bearing Stand with miniVue Camera.



Trinocular Scope on Stand PF with Built in Fluorescent Illumination and USB Camera.



Trinocular Scope on Single Arm Stand with 10"x10" base and miniVue Camera.



Trinocular Scope mounted on PF Stand with miniVue Camera.

# **Optional Accessories**

### Eyepiece Lenses and Rubber Eye Guards



| Order #    | Description  |
|------------|--|
| 26800B-444 | <b>DSW-5X eyepieces</b> for DSZ-44, DSZT-44 and NSW series bodies. F.N. 22.5 |
| 26800B-446 | <b>DSW-5XZ eyepieces</b> for DSZ-70 and DSZT-70 series bodies. F.N. 20.      |



| Order #    | Description  |
|------------|--|
| 26800B-441 | <b>DSW-10X eyepieces</b> for DSZ-44, DSZT-44 and NSW series bodies. F.N. 23. |
| 26800B-448 | <b>DHW-10X eyepieces</b> for SPZ-50 and SPZT-50 series bodies. F.N. 23.      |
| 26800B-445 | <b>DSW-10XZ eyepieces</b> for DSZ-70 and DSZT-70 series bodies. F.N. 20.     |



| Order #    | Description   |
|------------|---|
| 26800B-442 | <b>DSW-15X eyepieces</b> for DSZ-44, DSZT-44, DSZT-70, DSZT-70 and NSW series bodies. F.N. 15 |
| 26800B-449 | <b>DHW-15X eyepieces</b> for SPZ-50 and SPZT-50 series bodies. F.N. 15.                       |



Order # Description **DSW-20X eyepieces** for DSZ-44, DSZT-44, DSZT-70, DSZT-70 and NSW series bodies. F.N. 11.4 26800B-443 DHW-20X eyepieces for SPZ-50 and SPZT-50 26800B-450 series bodies. F.N. 11.4.

\* \* Eyepieces listed above are sold in pairs only.


#### Rubber Eye Guards


| Order #    | Description                         |
|------------|-------------------------------------|
| 26800B-452 | Rubber Eye Guards for DSW eyepieces |
| 26800B-453 | Rubber Eye Guards for DHW eyepieces |

### Focusing Eyepiece 10x with Reticle



| Order #    | Description                             |
|------------|---|
| 26800B-455 | 10x with 5:100mm scale                  |
| 26800B-456 | 10x with 10:100mm scale                 |
| 26800B-457 | 10x with 20 x 20 0.5mm squares          |
| 26800B-458 | 10x with 10 x 10 1mm squares            |
| 26800B-459 | 10x with 10:100mm scale with cross line |







10:100mm scale with crossline

To order focusing eyepieces for the SPZ Series bodies, please add -10 to the end of the above mentioned part numbers.

<sup>\*</sup>Above eyepieces are for the DSZ/NSW series bodies.



# **Optional Accessories**

### Auxilary Objective Lenses

22

Stereo Zoon Microscopes



| Order #    | Description          |  |
|------------|----------------------|--|
| 26800B-461 | Auxiliary lens 0.5x  |  |
| 26800B-462 | Auxiliary lens 0.75x |  |







- 26800B-465 Lens Cover for protection of objectives
- 26800B-460 Description

  Adapter to mount Fluorescent Ring Light or Fiber Optic Annular Ring Light
- Please note 0.5x lens cannot be used with SPZ series bodies with stand P and PF. 0.5x lens cannot be used for stands T and TL and with NSW series with stand P
- \*\* 2x lens cannot be used with the DSZ and NSW series bodies.

### Carnera Adaptera



26800B-435 Adapter to Mount CCD Camera to our Trinocular bodies

\* Various Adapters are available for mounting Digital Cameras. Please call with the type of camera you want to use with our trinocular microscopes.

### Gliding Stages



Order # 26800B-475

Stage size 350mm x 250mm x 103mm. Base Size: 520mm x 480mm. Range of movement 360mm x 418mm.



Order # 26800B-476

Stage size: 300mm x 210mm x 40mm. Base Size 250mm x 250mm. range of movement 250mm x 250mm.



Order # 26800B-471

Gliding stage with attachments for micrometers. Mitutoyo No. 150-192 (MHN1-25). Size 114mm x 114mm. Range of movement 25mm x 25mm.



Order # 26800B-474

Rotatable. Size 135mm. Range of movement 25mm x 25mm.



Order # Description

26800B-472 Size 140mm x 114mm. Range of movement 94mm x 66mm.

# Illumination

### Standard Frequency Fluorescent Ring Lights



Aven fluorescent ring lights are designed for applications requiring a high quality illuminator. Provides 360° shadow free illumination. Our reflector housing is cast from high quality aluminum alloy (except for model 26200B-201) for durable and cool operation. Operates at 115V AC.



| 26200B-207 | to | 208 |
|------------|----|-----|
|------------|----|-----|

| Order #    | Description  |
|------------|--|
| 26200B-201 | Fluorescent Ring Light Economy, 8 watt Lamp                  |
| 26200B-202 | Fluorescent Ring Light Standard, 17 watt Lamp                |
| 26200B-203 | Fluorescent Ring Light with UV Lamp                          |
| 26200B-206 | Fluorescent Ring Light ESD Safe, 17 watt Lamp                |
| 26200B-207 | Fluorescent Ring Light with Focus mount for DSZ & NSW Series |
| 26200B-208 | Fluorescent Ring Light with Focus mount for SPZ Series       |

### White LED Ring Light w/Brightness Control



Designed to be used with standard microscopes and video lenses. Provides a stable bright light with 54 LEDs. These long life LEDs operate at very low temperature, are flicker free and do not change color over time. 110V

| Order #    | Description                                  |
|------------|--|
| 26200B-210 | White LED Ring Light with Brightness Control |

### White LED Ring Light w/Brightness & Sector Control



Designed to be used with standard microscopes and video lenses. Has a 7 step brightness control feature and four lighting modes, 1/4, 2/4, 3/4, and Full. Excellent for applications requiring a high degree of lighting control. Incorporates 60 Long Life LEDs that are flicker free and operate at low temperature and do not change color over time. 110V.

| Order #    | Description   |
|------------|---|
| 26200B-211 | White LED Ring Light with Brightness & Sector Control |

### Model L Fiber Optic Illuminators



#### Features

- High output 150 Watt Lamp
- Variable Intensity Control
- Approximately 200-2000 Hours Lamp Life (not guaranteed)
- Supplied with Ring Light (39") or Double Pipe Light (19.5")
- Illuminator with double pipe light has a focusing lens included, providing an illumination distance of 20-200mm and an illumination area of 10-40mm
- Input Voltage 110VAC

Dimensions: 11"x6.5"x5"

Weight: 9.6lbs.



| Order #    | Description  |
|------------|--|
| 26200A-205 | Model L Fiber Optic Illuminator w/Ring Light                               |
| 26200A-207 | <b>Model L Fiber Optic Illuminator</b> w/Double Pipe Light & Focusing Lens |



# Illumination

### Model 150 Fiber Optic Illuminator



#### Features

- High quality ball bearing fan for low noise and vibration
- High output 150 watt bulb
- Variable intensity control
- Easy lamp change
- Color/ Daylight Filters available
- Color Beige

|               |            | 0.00  |
|---------------|------------|-------|
| $\overline{}$ | pecificati |       |
|               | COCITICATI | -     |
| -             |            | יו וט |
| _             |            |       |

| Input voltage     | 110 VAC             |
|-------------------|---------------------|
| Color Temperature | 3250 kelvin         |
| Lamp life         | 200-2000 hours      |
| Weight            | 7.5 lbs. (3.4 kgs.) |
| Dimensions        | 7.0" x 7.5" x 6.5"  |
|                   |                     |

| Order #  | Description                       |
|--|-----------------------------------|
| 26200A-200   | Model 150 Fiber Optic Illuminator |
| <b>26200A-212</b> Adapter for 1.125" ID Ring Light |                                   |

### Fiber Optic Ring Lights



#### Features

- Uniform Lighting
- Streamlined Design
- ■360° shadow free illumination
- 3 thumb screw for easy mounting
- Accepts polarizer and darkfield adapters
- Black anodized aluminum housing
- Crimped Stainless Steel terminations
- 36" cable length

### Order # Description

| 26200A-402 | Ringlight 2.31" ID Can be mounted on all SPZ, DSZ and NSW Series Microscopes |  |
|------------|--|--|
| 26200A-403 | Ringlight 1.125"ID Can be mounted on Video Lenses                            |  |

### Fiber Optic Goosenecks



These light guides are constructed with high quality glass fiber optics and provide the highest degree of adjustable and interference free uniform illumination of focused white light. Focusable lenses allow for variable spot light adjustments making these ideal for situations where intense illumination is required. Our light guides are offered in a standard stainless steel obedient sheathing which offers "stay-put" positioning.

| Order #    | Description   |
|------------|---|
| 26200A-523 | <b>Double Gooseneck</b> with Focusing lens 18" Long |

### Fiber Optic Area Backlights



These high-output, uniform backlights are made of the highest quality components and offer a sleek, slim design, which makes them highly versatile for mounting in tight spaces. The housing consists of black, electrocoated steel and the sheathing is PVC covered metal hose. Backlights have a  $\pm 10\%$  uniformity. 36" long cable length.

| 26200A-532 | FOA Backlight 4" x 4" (101.6 x 101.6mm) |
|------------|---|
| Order #    | Description                             |

# Digital Color Camera

#### miniVue Camera



World's first digital color camera for microscopy and video inspection applications with a built in 2" LCD Screen and instant image capture feature with the built in SD Card. A PC is not required for image capture or image viewing, saving bench space and money. A 2.0 USB outlet is provided to connect to a PC.

Can be used with **any microscope** or video lens with a C-Mount

#### Features

- 3.1Megapixel Camera
- Built in High Resolution 2" Screen
- Full Digital Signal Processing
- Capture Images and Video on the built in SD Card. Transfer to a PC at your convenience
- Connect via USB to a PC or Printer
- Friendly User Interface
- Crosshair feature for location and measurement
- TV Out allows the connection of an external LCD monitor for detailed viewing
- Wireless and wired USB Shutter control
- Many stand alone features on camera (see www.aveninc.com for more details)

#### Specifications

| Sensor Resolution  | 3.1 megapixels      |
|--------------------|---------------------|
| Maximum Resolution | 8 megapixels        |
| Sensor Type        | 1/2" CMOS           |
| Frame Rate         |                     |
| LCD Screen Size    |                     |
| Memory Card        | SD/MMC Card         |
| TV Output          | NTSC/PAL            |
| USB Interface      | Yes                 |
| Controller         | Remote and USB      |
| Picture Format     | jpeg                |
| Video Format       | mpeg4               |
| Printer Support    | Pictbridge and DPOF |
| Mount              | C-Mount             |
| Power Supply       | DC 12V, 1.5A        |

26100-230 miniVue Camera



# &CMOS Cameras

### High Resolution DSP CCD Color Cameras

26

Our color cameras use single integration type CCD complemented by a digital signal processing system to provide both high quality images and a host of compensation functions. These cameras are ideal for machine vision, video inspection and microscopy applications.

#### Highlights

- CCD Total Pixels: 881(h) x 508 (v)
- 26100-102 has Y/C and Composite Outputs
- Resolution: 470 TVL / 580 TVL Enhanced 🔵 C & CS Mount

On Screen Display

- Detail Specs at www.aveninc.com
- 26100-100 has S-Video and Composite Outputs

| Order #   | Description                       |
|-----------|-----------------------------------|
| 26100-100 | 1/3" CCD Camera with power supply |
| 26100-102 | 1/2" CCD Camera with power supply |

### Infinity 1 CMOS Color Cameras



The Infinity CMOS USB 2.0 cameras are designed to be a cost effective, versatile solution for a variety of microscopy imaging applications. Features include auto white balance, full exposure control, programmable gain, sub-windowing and region of interest. It is excellent for documentation and archiving applications.

#### Highlights

- 1 and 3 Meagpixel. 6 also available upon request
- Perfect for documentation and archiving applications
- Fast frame rate

| C-mount    |
|------------|
| O IIIOGIII |

Infinity Analyze Software Included. For more details of this software please visit our website at www.aveninc.com

| 26100-216 | Infintiy 1 CMOS 3.1 Megapixel Camera |  |
|-----------|--------------------------------------|--|
| 26100-215 | Infintiy 1 CMOS 1.3 Megapixel Camera |  |
| Order #   | Description                          |  |

### Specifications

| I | Megapixel | Resolution  | FPS | Sensor    |
|---|-----------|-------------|-----|-----------|
|   | 1.3       | 1280 x 1024 | 15  | 1/2" CMOS |
|   | 3.1       | 2040 x 1536 | 6   | 1/2" CMOS |

### Infinity 2 CCD Color Cameras



Equipped with a high quality Sony CCD Sensor, these USB 2.0 cameras offer excellent sensitivity, high dynamic range and a 12-bit digital output. Features include binning, auto white balance, full exposure control, programmable gain, sub-windowing and region of interest. It is ideal for higher-end scientific, medical, ophthalmic and life science applications.

#### Highlights

- 1, 2 and 3 megapixel resolution
- C-Mount
- Migher dynamic range for quantitative analysis Minfinity Analyze Software Included. For more
  - details of this software please visit our website at, www.aveninc.com

Fast frame rate Low noise electronics

# Specifications

| 26100-220 1.4 Megapixel CCD Camera |                          |
|------------------------------------|--------------------------|
| 26100-221                          | 2.0 Megapixel CCD Camera |
| 26100-222                          | 3.3 Megapixel CCD Camera |

| Megapixel | Resolution  | FPS | Sensor      |
|-----------|-------------|-----|-------------|
| 1.4       | 1390 x 1040 | 15  | 1/2" CCD    |
| 2.0       | 1616 x 1216 | 12  | 1/1.8" CCD  |
| 3.0       | 2080 x 1536 | 5   | 1/1.8" CCSD |

# **CCD &CMOS Cameras**

### Infinity Lite Camera



INFINITY lite is a compact, affordable microscopy camera that delivers outstanding image quality and excellent value. Highlights include live video preview and real-time focus for the efficient capture of optimal images, an intuitive user application for camera control, full integration to popular third-party imaging applications through our TWAIN drivers, USB 2.0 interface, standard C-mount and compact design for trouble-free installation, and one standard cable for power and data to minimize clutter. As with all INFINITY cameras, no costly framegrabber is required.

#### Highlights

- 1.5 megapixel camera
- High-speed USB 2.0 interface eliminates a framegrabber and facilitates ease of installationon both laptop and desktop computers
- INFINITY CAPTURE software application included
- Mac compatible

- On-board image processing of the INFINITY lite's progressive scan 1.5 megapixel image sensor results in accurate color fidelity
- Full color sub-windowing allows for rapid, focus and scanning of samples: 15 fps at full 1440x1080 resolution and 60 fps at 640x480 resolution
- 8-bit pixel data
- Rugged dependability and versatility

| Order #   | Description                              |  |
|-----------|--|--|
| 26100-212 | Infinity Lite Color Camera 1.5 Megapixel |  |

# **LCD Monitors**



Produces only the sharpest and most brilliant color images. Featuring easy to use OSD controls and built in speakers. You will find this monitor both easy to use and a pleasure to look at. This monitor offers a maximum resolution of 1280 x 1024 pixels and a refresh rate up to 75KH translating into a flicker free monitor that is easy on your eyes.

Comes with

- 12V DC adapter /power chord
- D-Sub 15 pin VGA connector cable
- Audio Cables

#### Inputs

Video Input: 15-pin D sub/ AV/ S-Video

|           | Order #   | Description     |  |
|-----------|-----------|-----------------|--|
| 26700-402 |           | 17" LCD Monitor |  |
| -         | 26700-404 | 15" LCD Monitor |  |



# **Stands and Focus Mounts**

#### Focus Mount

28

Stereo Zoo Microscope



Focus mount to hold our SPZ, DSZ and NSW Series bodies. Rack & Pinion mechanism allows for precise focusing over a 55mm travel. Coarse focus mechanism incorporates a slip clutch and tension adjustment. Fits a 25mm mounting post and has an opening to accept bodies of diameter 74mm (2.9")

| Order # | Description |  |
|---------|-------------|--|
| SCW-PA  | Focus Mount |  |

# Stand Type PF with Focus Mount and Built in Fluorescent Light



#### Features:

- Large stage 220mm(8.66") x 284mm (11.18") to accommodate a variety of parts
- Built in 9 watt low temperature fluorescent light in focus mount
- Length of Post 250mm (9.84")

| Order # Description |  |
|---------------------|--|
| Stand PF            | For DSZ-44, DSZT-44, and NSW Series Bodies |
| Stand PFM           | For SPZ-50 and SPZT-50 Series Bodies       |
| Stand PFL           | For DSZ-70 and DSZT-70 Series Bodies       |

### Pole Type Stand with Focus Mount



#### Features:

- Large stage 220mm (8.66") x 284mm (11.18") to accommodate a variety of parts
- Length of Post 250mm (9.84")

| Order # | Description                         |  |
|---------|-------------------------------------|--|
| Stand P | For SPZ, DSZ, and NSW Series Bodies |  |

# **Stands and Focus Mounts**

### Stand Type T and L with Focus Mount



#### Features:

- Transmitted and Incident Lights are built in the Type T stand as shown
- Type T stand has Fluorescent 9 watt incident light and Tungsten Transmitted light
- Base 160mm x 219mm (6.30" x 8.62")
- Stage Plate: Frosted glass plate (diameter 80mm (3.15")) and Frosted blue filter (diameter 37mm ( 1.46"))
- Stand Type L same as stand T but Incident Light is Tungsten (not shown)
- Rack and Pinion Focus Mount, tension control pin included

| Order # | Description                                |
|---------|--|
| Stand T | For DSZ-44, DSZT-44, and NSW Series Bodies |
| Stand L | For DSZ-44, DSZT-44, and NSW Series Bodies |

### Standard Boom Stand with Mounting Post



#### Features:

- Perfect for stationary video and microscopy applications
- Heavy Duty Steel Base 10" x 10" x 0.75" (254mm x 254mm x 19mm ), 21lbs
- 16" (406mm) Vertical Post with 16" (406mm) Horizontal Post. Diameter of Post and Bar 1-3/16" (30.16mm). Nickel plated
- Safety Clamp Included
- Mounting Post with tilt feature for Focus Mount SCW-PA
- Sturdy and stable
- Requires focusing mount to mount microscope bodies

| Order #    | Description                            |  |
|------------|--|--|
| 26800B-520 | Standard Boom Stand with Mounting Post |  |

## Daluxa Boom Stand with Mounting Post



#### Features:

- Perfect for stationary video and microscopy applications especially where vibrations can disrupt your work
- Heavy Duty Steel Base 10" x 10" x 0.75" (254mm x 254mm x 19mm), 21lbs or 17" x 20" Heavy Duty Base, 27lbs to accommodate large parts on base
- 16" (406mm) x 1-1/2" OD (38mm) stainless steel vertical post
- 18" (457mm) x 1-1/2" OD(38mm) aluminum horizontal post
- Post with tilt feature for Focus Mount SCW-PA included
- Quick release red anodized aluminum safety clamp
- Optional 25" Vertical Post and 25" Horizontal Bars available
- Optional table mount and C-clamp mounts available

| 111       | Optional table | means available   |
|-----------|----------------|---|
|           | Order #        | Description   |
|           | 26800B-525     | <b>Deluxe Boom Stand</b> with Tilt Mounting Post and 10" x 10" base |
|           | 26800B-530     | <b>Deluxe Boom Stand</b> with Tilt Mounting Post and 17" x 20" base |
| 26800-530 |                |   |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com



# **Stands and Focus Mounts**

### Standard Dual Arm Ball Bearing Boom Stand with Mounting Post

# Stereo Zoon Microscopes



#### Features:

- Stability of the standard boom stand but with ultra smooth movement of a ball bearing slide
- Great for inspection applications where magnification adjustment and the ability to move across a specimen are important
- Heavy duty base 11" x 10" x 1.25" (285mm x 260mm x 32mm), 21lbs
- Main Vertical post 15" (380mm) long, extension post 9" (225mm) long. OD 1-1/2' (37mm) for a total post length of 24"
- Horizontal Post 22.5" (570mm) long from end to end.
- Safety Clamp included
- Post with Tilt Feature for Focus Mount SCW-PA included

| Order #    | Description                        |
|------------|------------------------------------|
| 26800B-535 | Double Arm Ball Bearing Boom Stand |

### Daluxe Dual Arm Ball Bearing Boom Standing with Mounting Post



#### Features:

- Ultra smooth movement of a ball bearing slide
- Two types of bases available 10" x 10'( 254mm x 254mm) and 17" x 20" (432mm x 508mm) Weights 21 lbs and 27 lbs respectively
- 16" (406mm) Stainless Steel Vertical Post (0D 1-1/2"). Other sizes available on request
- Thomson linear ball bearing and dual hardened stainless steel shafting for the horizontal axis. Total horizontal motion 12-1/2" (317.5mm)
- Safety Clamp included
- Optional table mount clamps and C-Clamps available
- Post with tilt feature for focus mount SCW-PA included



| Order #    | Description  |
|------------|--|
| 26800B-540 | <b>Deluxe Dual Arm Ball Bearing Boom Stand</b> with Mounting Post and 10" x 10" base |
| 26800B-545 | Deluxe Dual Arm Ball Bearing Boom Stand with Mounting Post and 17" x 20" base        |

# **Stands and Focus Mounts**

### Lift Articulating Arm Boom Stand



#### Features:

- Designed to allow maximum freedom of movement
- Perfect for video and lighting applications that require a lot of movement
- Flexible arm can easily be adjusted into hard to reach locations and out of the way again
- Various mounts and bases available to suit your application
- Vertical Post 16" (406mm). OD 1-1/2"
- Lift Articulating boom arm approximately 30"(762mm) horizontal reach, and approximately 15"(381mm) vertical travel ± 40° movement from horizontal
- Adjustable gas spring counter balance allows "free floating" of O-20 lbs. Ambidextrous vertical position lock. Gas spring provides controlled "safe" lift and decent
- Mount post with tilt feature included for focus mount SCW-PA
- Safety Clamp included



| Order #    | Description  |
|------------|--|
| 26800B-550 | Lift Articulating Arm Boom Stand with Table Clamp    |
| 26800B-555 | Lift Articulating Arm Boom Stand with 17" x 20" base |

### Articulating Arm

#### Features:



- DAdjustable, counter-balanced articulating arm moves easily up or down through 14.5".
- Heavy-Duty construction allows for maximum of 20 lbs of weight.
- Wide range of horizontal and vertical movements. Scanning area can reach 3"
- Adjustable counter-balanced arm which allows easy, hand guided up and down movement, works in spaces where a conventional boom stand will not fit.

Order # Description

26800B-560 Articulating Arm

### Standard Stand



#### Features:

- Aluminum powder coated base 11" x 13" x 1/2" ( 279mm x 330mm x 12.7mm), 8lbs.
- 10 tapped holes for mounting X-Y stages
- 16" Stainless Steel vertical post (OD 0.96", 24.5mm) with safety clamp
- Compatible with focus mount SCW-PA

Order #

Description

26800B-570 Standard Stand with Safety Clamp

### Ergo Stand



#### Features:

- Aluminum powder coated base 13" x 13" x 1/2", 8lbs. [330mm x 330mm x 12.7mm] with Black & White glass plate
- 16" Stainless Steel vertical post (OD 0.96", 24.5mm) with safety clamp
- Compatible with focus mount SCW-PA

Order #

Description

26800B-575

**Ergo Stand** with Safety Clamp



# **Shop Microscopes**

### Shop Microscope 40x and 100x

Stere Micro



Designed for quick and precise measurements in laboratories, workshops and assembly lines. Comes with a dual scale reticle graduated in both inches and millimeters. A turn of the eyepiece brings the reticle in sharp focus. No calibration is needed. Reticle can be rotated for measurement in any direction. Dual knobs with rack and pinion focusing lets you quickly refine the image. Includes a fully adjustable battery operated penlight illuminator. Scope has a cutaway opening at base for subject manipulation.

#### Specifications

| MODEL                            | Shop Microscope 40x | Shop Microscope 100x |
|----------------------------------|---------------------|----------------------|
| Magnification<br>(Field of View) | 40X (4.5 mm)        | 100 (1.8 mm)         |
| Objective Lenses                 | 4x                  | 10x                  |
| Focusable Eyepiece               | 10x with Scale      | 10x with Scale       |
| Measuring Range                  | 3.0 mm/0.1"         | 1.0 mm/0.05"         |
| Minimum Gradation                | 0.02 mm/0.001"      | 0.01 mm/0.001"       |
| Working Distance                 | 15 mm               | 5.5 mm               |
| Height                           | 200 mm              | 200 mm               |
| Width                            | 65 mm               | 65 mm                |
| Net Weight                       | 570 g               | 580 g                |
| Accessory                        | Penlight            | Penlight             |

| Order #    | Description                                      |
|------------|--|
| 26800C-531 | <b>Shop Microscope 40x</b> with 3.0mm/0.1" Scale |
| 26800C-532 | Shop Microscope 100x with 1.0mm/0.05" Scale      |

### Pocket Microscopes 25x



"Pen Size" powerful direct measuring pocket scope for quick, close examination. Excellent for detecting flaws or imperfections, surface measurements, examination of fibers, print, etc.

Comes with a measuring metric glass reticle. Has beveled opening for gathering and focusing light. Scope has an aluminum case with a satin finish and pocket clip. Furnished in a vinyl sleeve.

| 26800C-533 | Pocket Microscopes 25x |  |
|------------|------------------------|--|
| Order #    | Description            |  |

## Specifications

| Magnification | Field of View | Scale Calibration | Measurement<br>Range | Length     | Diameter        |
|---------------|---------------|-------------------|----------------------|------------|-----------------|
| 25x           | 3.24mm        | 0.05mm            | 0-3mm                | 127mm (5") | 11.10mm (7/16") |

# **Shop Microscopes**

### Illuminated Pocket Microscopes



Perfect carry-with microscope. Ideal for on site detailed examination of small areas and objects. Useful for engineers, tool makers, quality control inspectors, field researchers etc.

Has a built in light source. In addition a clear acrylic stand allows ambient light to the object under examination.

Operates on two AA batteries not included. Case Included.

|   | Order #    | Description   |
|---|------------|---|
|   | 26800C-534 | Illuminated Pocket Microscope 40x w/Scale: Measuring Range 4mm, Graduation: 0.1mm   |
| ) | 26800C-536 | Illuminated Pocket Microscope 20x   |
|   | 26800C-538 | Illuminated Pocket Microscope 30x w/Scale: Measuring Range 4mm, Graduation 0.1mm    |
|   | 26800C-540 | Illuminated Pocket Microscope 50x w/Scale:<br>Measuring Range 4mm, Graduation 0.1mm |
|   |            |   |

# Loupes & Magnifiers

### Loupes with Scales

26800C-536 to 540




Loupes with reticles for measurement and inspection. Comes with ReticleScale No.1 and Vinyl Case. Optional reticle scales are available.

| Order # | Description          |  |
|---------|----------------------|--|
| 26001   | Loupe with Scale 7x  |  |
| 26002   | Loupe with Scale 10x |  |
| 26003   | No. 1 Reticle Scale  |  |
| 26004   | No. 2 Reticle Scale  |  |
| 26005   | No. 3 Reticle Scale  |  |
| 26006   | No. 4 Reticle Scale  |  |



No.1
Lengths in either inches or millimeters can be measured with the appropriate line.
Maximum:0.6" or 16mm



No.3
Angles, redius, diameters, widths, etc.

can be measured mainly in inches.

No.4

Angles, redius, diameters, widths, etc. can be measured mainly in millimeters.



# **Loupes & Magnifiers**

### Inspection Eye Loupes



Great for close inspection. Rests comfortably in the eye socket. Lightweight yet sturdy. Plastic mount. Our 8x, 6x and 4x loupes come with rubber cushion for additional comfort.

| Order # | Description                             |
|---------|---|
| 26034   | 10x Eyeloupe 1" WD                      |
| 26041   | 8x EyeLoupe with Cushion 1" WD          |
| 26042   | <b>6x EyeLoupe</b> with Cushion 2" WD   |
| 26043   | <b>4x EyeLoupe</b> with Cushion 2.5" WD |

### Inspection Eye Loupes



Fixed focus magnifiers with clear acrylic bases that permit ambient light to illuminate subject for clear bright viewing.

| 26052   | <b>3x Inspection Magnifier</b> with 3" Diameter Lens |
|---------|--|
| 26051   | 10x Inspection Magnifier with 1" Diameter Lens       |
| Order # | Description  |

Swing Out Inspection Loupes



| Order # | Description                                 |
|---------|---|
| 26010   | 10x Hex Loupe 18mm Diameter Triplet Lens    |
| 26011   | 10x Loupe 16mm Diameter Triplet Lens        |
| 26012   | <b>20x Loupe</b> 12mm Diameter Triplet Lens |

### Giant Folding Loupe



Double glass lens provides a large viewing area. Lens diameter is 1-3/4" and has a magnification of 6x.

| Order # | Description             |
|---------|-------------------------|
| 26013   | Giant Folding Loupe, 6x |

### Magnifier with Clamp



Has an adjustable 2 1/2" diameter magnifying glass. Allows for close observation of work during soldering operation.

| Order # | Description          |  |
|---------|----------------------|--|
| 26000   | Magnifier with Clamp |  |
| 100     |                      |  |

35

# **Loupes & Magnifiers**

### Magnifier with Tweezers



Magnifying glass mounted onto stainless steel, anti acid, anti magnetic tweezers. Lens diamter is 1.25" and the power is 3x. Available with pointed or curved tweezer tips. Excellent for working on small parts that require magnification.

| Order # | Description                     |  |
|---------|---------------------------------|--|
| 26030   | 3x Magnifier with Curved Tips   |  |
| 26031   | 3x Magnifier with Straight Tips |  |

# Headband Magnifier with LED Illumination



Comes with 1.5x, 2x, 2.5x and 3.5x clip-on lenses. LED light provides 50,000 hours of illumination. Light operates with 3 AAA batteries (not included).

| 26221   | Headband Magnifier with LED Illumination |
|---------|--|
| Order # | Description                              |

# Headband Magnifier with Light



Comes with 1.2x, 1.8x, 2x and 3.5x clip on lenses. Features a 2.2v bulb and operates with 4 AAA batteries (not included).

| 26222   | Headband Magnifier with Light |   |
|---------|-------------------------------|---|
| Order # | Description                   | _ |

### Optivisor



Soft pliable wide headband for ultimate comfort. Easily adjusts to any head size. Self locking, remains in place. Glass lens.

| Order # | Description                                      |
|---------|--|
| 26101   | Magnification: 1-1/2x Working Distance: 20" (#2) |
| 26102   | Magnification: 1-3/4x Working Distance: 14" (#3) |
| 26103   | Magnification: 2x Working Distance: 10" (#4)     |
| 26104   | Magnification: 2-1/2x Working Distance: 8" (#5)  |
| 26105   | Magnification: 2-3/4x Working Distance: 6" (#7)  |
| 26106   | Magnification: 3-1/2x Working Distance: 4" (#10) |

### Accessories

| 26107 | Replacement Lens #2 (1-1/2x)  |
|-------|-------------------------------|
| 26108 | Replacement Lens #3 (1-3/4x)  |
| 26109 | Replacement Lens #4 (2x)      |
| 26110 | Replacement Lens #5 (2-1/2x)  |
| 26111 | Replacement Lens #7 (2-3/4x)  |
| 26112 | Replacement Lens #10 (3-1/2x) |
| 26113 | Auxiliary Lens 2-1/2x         |

# **Magnification & Task Lighting**

Aven's Magnification & Task Lighting products are for the demanding professionals who need the flexibility to view objects from a variety of angles.

### **Magnifying Lamps**

Our magnifying lamps enable users to magnify objects up to four times. Some of the features among products within this line also include lighting that is positioned so that shadows will not hinder your ability to inspect and analyze.

# Task Lighting

All of our task lighting products come equipped with a flexible, adjustable arm that allows users to direct light where they need it most for assignments in such areas as manufacturing, assembly and inspection.

AVEN

36

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

# **Magnification Lighting**

# ProVue Magnifying Lamps



Our most popular magnifying lamp is designed for professionals. It is equipped with an ultra-bright 22-watt circular fluorescent bulb and a Crystal Clear 5", 3-diopter glass lens to provide 360° distortion free viewing. Metal housing is mounted on a 45" spring balanced arm that stays set in any position. Lamp operates at 115V-AC and comes complete with mounting clamp and a 5-foot power cord. 1 year warranty (excludes bulb).

### Optional Accessories

- Weighted Base
- Swing-Away Lens 5 diopter (2.25x)
- Auxiliary Lens 3 diopter (1.75x)





Swing-Away Lens

**Auxiliary Lens** 

| Order #                | Description                            |
|------------------------|--|
| 26501-SIV              | ProVue Magnifying Lamp-Ivory-3 Diopter |
| 26501-WB Weighted Base |  |
| 26501-B22              | 22-watt Replacement Bulb               |
| 26501-SLA              | Swing-Away Lens – 5 Diopter (2.25x)    |
| 26501-AL3              | Auxiliary Lens – 3 Diopter (1.75x)     |

# Provue Deluxe Magnifying Lamp 'Features a Heavy Duty Spring Balanced Arm'



Designed for demanding professionals. It is equipped with an ultra-bright 22-watt circular fluorescent bulb, a Crystal Clear 5", 3-diopter (1.75x) lens, mounted on a silvergrey metal housing. The fluorescent bulb is protected with a clear plastic diffuser/splash guard. The heavy-duty adjustable arm with tempered steel springs allows for easy positioning. When fully extended the arm has a reach of 35". Comes with a mounting clamp. Can also be mounted directly on the working surface. Operates at 115V-AC and comes with a 5-foot power cord. 1 year warranty (excludes bulb).

### Optional Accessories

- Swing-Away Lens 5 diopter (2.25x) for total magnification of 8 diopter (4x)
- Auxiliary Lens 3 diopter (1.75x) for total magnification of 6 diopter (3.5x)

26501-AL3





Swing-Away Lens

Order # Description 26501-DSG **ProVue Deluxe Magnifying Lamp-Silver** 26501-B22 22-watt Replacement Bulb 26501-SLA Swing-Away Lens - 5 Diopter (2.25x)

Auxiliary Lens - 3 Diopter (1.75x)



38

# **Magnification Lighting**

# Maxi-Mag Magnifying Lamp



Super large 7", 3-diopter lens gives you unrivaled field of view and work space. Comes with a powerful 32-watt circular fluorescent bulb. This lamp can show you things that you have never seen before! The Ivory mar-resistant engineered plastic housing is mounted on a 45" spring balanced arm for easy positioning. Lamp operates at 115V-AC and comes complete with a mounting clamp and a 5-foot power cord. 1 year warranty (excludes bulb).

#### Optional Accessories

- Weighted Base
- Swing-Away Lens 5 diopter (2.25x) for total magnification of 8 diopter (4x)



| Order #   | Description Swing-Away Lens         |  |
|-----------|-------------------------------------|--|
| 26503-SIV | Maxi-Mag Magnifying Lamp – Ivory    |  |
| 26503-B32 | Replacement Fluorescent Bulb        |  |
| 25501-WTB | Weighted Base                       |  |
| 25501-SLA | Swing-Away Lens – 5 Diopter (2.25x) |  |

# Mighty Mag Magnifying Lamps



The Mighty Mag features a large  $7" \times 5.2"$ , 3-diopter (1.75x), distortion free Crystal Clear lens mounted in a high tech style mar-resistant engineered plastic housing with dual light sources. The large, rectangular viewing area of the glass enables comfortable viewing with both eyes and provides shadow-free magnification with light coming from both sides. The housing is mounted to an internal spring balanced arm with a 30" reach that will set in any position. Unit operates at 115V-AC and comes complete with mounting camp and a 5-foot power cord. 1 year warranty (excludes bulb). Available in Ivory and Black (ESD safe).

#### Optional Accessories

Swing-Away Lens – 5 diopter (2.25x) for additional magnification



Swing-Away Lens



| Order #   | Description                         |
|-----------|-------------------------------------|
| 26505-SIV | Mighty Mag Magnifying Lamp – Ivory  |
| 26505-ESD | Mighty Mag Magnifying Lamp – Black  |
| 26505-B09 | Replacement Bulb                    |
| 26501-SLA | Swing-Away Lens – 5 Diopter (2.25x) |
| 26506-BT4 | Black Light Bulb                    |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108
Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveni

39

# **Magnification Lighting**

# MaxiVue Magnifying Lamp



The MaxiVue offers a fully adjustable magnifier lens (can be rotated) for full range inspection capabilities. Unnecessary slouching is eliminated. Three 9-watt compact fluorescent lamps provide two light levels: 27-watts from top and both sides of the magnifier or 18-watts of side-to-side lighting. Features a large 6.9"x4.2", 3-diopter (1.75x) Crystal Clear lens, mounted on a mar-resistant engineered plastic housing. The spring balanced arm has a 40" reach and stays in any position. Operates at 115V-AC and comes complete with a mounting clamp and a 5 foot power cord. 1 year warranty (excludes bulbs).

### Optional Accessories

Weighted Base

| Order #   | Description                     |
|-----------|---------------------------------|
| 25506-SIV | MaxiVue Magnifying Lamp – Ivory |
| 26501-WB  | Weighted Base                   |
| 26505-B09 | Replacement Bulb                |
| 26506-BT4 | Black Light Bulb                |

# VuePlus Magnifying Lamp



VuePlus features a 4", 3-diopter Crystal Clear lens. Comes with a 60-watt incandescent bulb which provides "incident lighting" for viewing irregular work surfaces. Comes with a 30" spring balanced arm with a tension control knob at the arm joint and a table mounting clamp. Operates at 115V-AC.

| Order #   | Description                     |
|-----------|---------------------------------|
| 26504-SBK | VuePlus Magnifying Lamp - Black |



# lask Lightin

# OptiVue Magnifying Lamp



OptiVue combines function and form in one small package. With a powerful 13-watt fluorescent bulb, an all capable 3-diopter lens and a highly flexible gooseneck, this small "goes anywhere" dynamo provides illumination and magnification wherever you need.

| 2 | 6507-SBK | OptiVue Magnifying Lamp - Black-3 Diopter |
|---|----------|---|
|   | Order #  | Description                               |

40

# Titan Halogen 150 Watt Task Light



Provides clean and crisp light. Features a powerful 150-watt bulb mounted in a black metal housing. Comes complete with a 35" spring balanced arm with tension control and mounting clamp. Operates at 115V-AC.

| Order #   | Description               |  |
|-----------|---------------------------|--|
| 26512-SBK | Titan 150-watt Task Light |  |

# Elumina 50 Watt Task Light



With a contemporary design, the Elumina task light allows you to direct light where you need it. Adjustable arm extends 23 inches from the weighted base. Lamp includes a 50-watt halogen bulb. Silver Satin Finish. Comes with a 5-foot power cord. Operates at 115V-AC.

| Order #   | Description                |  |  |
|-----------|----------------------------|--|--|
| 26511-SSL | Elumina 50-watt Task Light |  |  |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

# **Task Lighting**

### Aurora Combo Lamp



Features a 9 1/2" shade with a 22-watt fluorescent and a 60-watt incandescent bulb. A 3-way switch permits selection of fluorescent or incandescent or both. A 42" adjustable spring balanced arm with tension control allows you to position the lamp exactly where you require. Ivory color. Comes with a mounting clamp and a 5-foot power cord. Operates at 115V-AC.

| Order #   | Description       |  |
|-----------|-------------------|--|
| 26515-SIV | Aurora Combo Lamp |  |
|           |                   |  |

# Magna Fluorescent Lamp



Features a flexible 42" spring balanced arm supplied with two 15-watt fluorescent tubes that provide uniform light. 19" rectangular head features a handle that permits easy positioning. Comes with a mounting clamp and a 5-foot power cord. Operates at 115V-AC.

| 26516-SIV | Magna Fluorescent Lamp |  |
|-----------|------------------------|--|
| Order #   | Description            |  |

# Magna Daluxa Fluorescent Lamp



A whole new class of elegant looking fluorescent light from Aven designed to give you crisp, flicker-free lighting, and a maximum uniformity together with a larger lighting area. The 20" lighting head is totally enclosed and features a 55 watt fluorescent bulb. Features a built-in electronic ballast for increased lumen.

The heavy duty industrial grade adjustable arm with tempered steel springs and tension control knobs allows you to easily position the lamp where you want it. The head swivels 310° and tilts 210° for maximum adjustment. Comes with a mounting clamp and a 5 ft power chord. Operates 115V-AC. 1 year warranty (excludes bulb).

| 26516-D155 | Magna Deluxe 20" Fluorescent Lamp |
|------------|-----------------------------------|
| Order #    | Description                       |



42

# Magna Daluxa XL 3 Tube Fluorescent Lamp



#### Features:

- 45 watt fluorescent lamp (3 tubes, 15 watts each) for demanding visual tasks.
- Switches allow you to turn on one, two, or three lamps to suit your needs.
- Spring balanced 35" arm allows rapid positioning of the light and will stay in position needed for your application
- All metal construction with baked on enamel finish.
- Built-in electronic ballast
- C-clamp included for mounting to tables up to 2" thick.
- 3-cord plug



Description

Magna Deluxe XL 3 Tube Fluorescent Lamp

# Sirus Quartz Halogen Task Lights



Excellent for all types of applications requiring high intensity illumination, such as manufacturing, assembly, and inspection. Round tube arms are vibration resistant but can be adjusted to provide the lighting angle you require (Also available with a flex arm). Lamp Head can be moved in up and down direction. 20 Watt Halogen bulb included. Can accept up to 50 watt bulb. C-Clamp is included. Optional Magnetic Base also available. Industrial Grade Quality. 1 year warranty (excludes bulb).

| Order #  | Description                       |  |  |
|----------|-----------------------------------|--|--|
| 26521    | Short Arm Task Light              |  |  |
| 26522    | 220mm (8.66") Arm Task Light      |  |  |
| 26523    | 440mm (17.32") Arm Task Light     |  |  |
| 26524    | 800mm (31.5") Arm Task Light      |  |  |
| 26525    | 520mm (20.5") Flex Arm Task Light |  |  |
| 26520-MB | Magnetic Base                     |  |  |

# **Precision Tools**

To provide years of worry-free service, we have selected only the best tools for our kits and provide them with a lifetime guarantee.

Our tool kits range from 22 to 163 pieces and can be used in such fields as electronics, engineering and any other task that requires precision assembly.

Tools can also be purchased individually from the following available categories:

### Ergo Pliers & Cutters

Featuring scientifically designed handles to provide exceptional comfort, this product is made from stainless steel with a non-reflective black finish. Dual-leaf springs, a box joint construction for exceptional durability and induction-hardened cutting edges are among the other attributes.

#### **Precision Tweezers**

Designed to meet applications in areas such as electronics, aircraft and aerospace, miniature assembly, precision engineering, optics and microscopy, these tools come in a variety of materials and can be custom made.

### Alignment Tools, Knives & Blades, Scissors, Desoldering/Soldering Tools

Featuring a range of speciality "hard to find" tools for assembly and field service applications.

#### **Precision Screwdrivers**

Specifically designed for electronics, our precision screwdrivers include such features as a black tip, nylon engineered plastic, duplex component handle designed for rapid rotation, greater comfort and control, fast turning swivel caps and imprinted sizes on the handle for easy selection.

# Crimping Tools & Wire Strippers

Featuring a broad selection to meet all your data com requirements. Special dies and crimpers are also available on request.

43

Precision
Tools







Ergonomically designed screwdrivers
Included in all Aven Kits for fatigue free work and high torque. The fine textured
grip has excellent anti-slip properties, and the blades are made from chrome
vanadium steel hardened throughout for long life.



Precision Tools



Lifetime Warranty on Tools

We have selected only the best tools for our kits to give you years of worry free service. Should any hand tool from your kit fail under normal use, we will replace it free of charge.



Rugged Hard Cases

High density polyethylene for outstanding toughness and attractive styling. The thick walls of our cases are reinforced with a full length piano hinge and a continuous tongue-and-groove aluminium valance. Cases come in a rich pebble grain finish that absorbs scratches without chipping or fading. (1 Year Warranty)



Our soft cases are manufactured from tough ballistic nylon. They are lightweight, yet strong, featuring oversized self healing zippers, large pockets for all your

extras, nylon web handles and shoulder straps.

# 163-paice Master Field Service Kit



#### TOOLS:

- Alignment Tool, 2-piece
- Brush
- Bit Set, 33-piece Security
- Crimping Tool, w/wire stripper, bolt cutter
- Cutters, 4" & 5" Diagonal
- Desoldering Pump
- Dispenser, 2 oz. Leak Proof
- Driver Blade Extension 4"
- Driver Blade Handle
- Duplex Outlet Tester
- Feeler Gauge
- File Set, Square, Round & Flat
- Hammer, 4 oz. Ball Pein
- Hemostat, 6" Straight
- Hex Driver Blades, 9-piece .050-3/16"
- Hex Key Set, 7-piece
- IC Extractor, 8-24 Pin
- Inspection Mirror
- Knife, w/pack of 5 precision utility blades

- Nut Driver Blades, 9-piece, 3/16"-1/2"
- Measuring Tape, 1" x 25 ft
- Parts Box, 8 Compartments
- · Penlight with Batteries
- Pick Up Tool 8 1/2" Magnetic
- Punches, Drive Pin 1/16" and 1/8"
- Ruler, 6" Stainless Steel
- Scissors, Electrician
- Scribe
- Soldering Aid, 3-piece
- Soldering Iron, 25-Watt
- Socket Set, 13-piece
- Solder Pack
- Solder Wick
- Spring Tool Push & Pull
- Torx Blade Set, 6-piece T6-T25
- Utility Knife
- · Wire Stripper, Adjustable Stop

#### PLIERS:

- 4" Chain Nose
- 10" Groove Joint

- Retaining Ring, Internal/External
- 5" Vise Ğrip
- 6" Long Nose with cutter

#### SCREWDRIVERS:

- Slotted: 3/32" x 2", 1/8" x 4", 1/8" x 8", 3/16" x 4", 1/4" x 4", 5/16" x 6", 1/4" x 4", 5/16" x 6", 1/4" Stubby
- Phillips: #0 x 2", #0 x 8", #1 x 3", #2 x 4", #2 Stubby
- Ratchet Offset
- Jeweler's Set, 6-piece
- Pocket: 3/32" & #0 Phillips

#### TWEEZERS:

- 6 1/2" Angle Point
- Reverse Action

#### WRENCHES:

- 4" Adjustable
- 6" Adjustable
- Wrench Set: 10-piece
- Combination 5/32" 7/16"

Order #

Description

15201

163-piece Master Field Service Kit

# 140-piece Information Systems Service Kit



Service PCs, workstations, file servers, LANs, Telco and RS232 line sharing devices, printers, plotters, and monitors. This kit contains the key tools to service equipment that processes, transmits, and displays information. Included are specialty tools for extracting DIPs, PLCC and RS232 pins, tamperproof drivers needed for accessing computers and monitors and two function testers for power and telephone lines.

Dimensions (LxWxH) 14.5"x18"x10.5"

Weight 24lbs. (with tools)

46

#### TOOLS:

- Alignment Tools, 3-piece set
- Crimping Tool, Wire/Bolt
- Bit Sets: 11-piece & 33-piece Security
- Cutters, 4" Diagonal & 5" Diagonal
- Drive Blade Handle 4"
- Drive Blade Extension 4"
- Feeler Gauge
- File Set, 3-piece: Square, Round, Flat
- Hemostat 6"
- Hex Driver Blades Ball End, 7-piece .050 - 3/32"
- IC Inserter/Extractor
- Interface Card Int/Ext Tool
- Key Cap Puller
- Knife #1 with 5 Precision Utility Blades
- Magnifier with Light
- Mirror/Magnetic Pick Up Tool 6"-18" Telescopic
- Nut dirver Blades, 8-piece 3/16" - 1/2"

- Penlight with Batteries
- Pick Up Tool, 4 1/2" 3-Prong
- Scissor
- Socket Set, 13-piece 1/4" Driver
  - (9) Sockets 3/16" 1/2"
  - (2) Extensions 3" and 6"
  - (1) Reversible Ratchet
  - (1) Spinner Handle
- Solder Pack
- Soldering Iron with Tip
- Solder Pump Anti-static
- Spring Hook Tool Set 2-piece
- Spudger
- Storage Box
- Tester, Duplex Outlet
- Tester, Telephone Line
- Tweezers Reverse Action
- Wire Stripper: 16-26 AWG
- Wrench 6" Adjustable

#### PLIERS:

- 4" Chain Nose
- 8" Groove Joint
- 5" Locking

- 6" Long Nose with Cutter
- RS232 Contact Insert/Removal Tool
- Retaining Ring

#### SCREWDRIVERS:

- Slotted: 3/32" x 2" Pocket, 1/8" x 8", 3/16" x 4", 1/4" X 6", 5/16 x 6"
- Phillips: #0 x 2" Pocket, #1 x 8", #2 x 4"
- Stubby 2-piece PH/ST
- Ratchet Offset
- Jeweler's Set, 6-piece

#### **EXTRACTORS:**

- 8-24 pin IC
- PLCC

#### **RULERS:**

- 6" Stainless Steel
- 1" x 25' Tape

Order # Description

15210

140-piece Information System Kit

### 35-piece Master Electronic Tool Kit



One of our most popular kits offering the best value. We have included in this kit a multimeter, a high-speed drill set with accessories, a vice for holding small objects, battery-powered vacuum cleaner, 30 watt soldering iron, and much more, all supplied in a sturdy aluminum case for years of service.

Dimensions (LxWxH) 13"x18"x6"

Weight 18lbs. (with tools)

- Brush
- Plastic Box for Components
- Cleaning Solution (20 ml)
- Desoldering Pump
- Drill Set 15-piece
- File Set 5-piece
- Crimping Tool 9" 5-way
- Cutter 4.5"
- Flashlight
- Head Cleaning Fluid
- Hex Key Wrench 7-piece
- Holder 3-prong
- Knife Utility (Snap-Off Blade)
- IC Inserter/Extractor
- Multimeter Digital
- Nut Drivers: 5 and 6 mm
- Scissor 6"
- Solder
- Solder Aid Kit, 3-piece
- Soldering Iron, 30-Watt Ceramic
- Soldering Iron Stand
- Tape, Electrical
- Tweezers 6.5" Cross Lock
- Wrench 6" Adjustable
- Wrench Set Ignition 10-piece

- Wrist Strap Anti-Static
- Vacuum Cleaner, 5-piece
- Vice

#### PLIERS:

- 5" Flat Nose Serrated
- 5" Bent Nose Serrated
- 5" Long Nose Serrated
- 8" Linesman

#### SCREWDRIVERS:

- Electrical Test
- Slotted: 3 x 75 mm; 5 x 75 mm, 6 x 38 mm, 6 x 100 mm
- Phillips: #0 x 75 mm, #1 x 75 mm, #1 x 150 mm, #2 x 100 mm, #2 x 200 mm, #2 x 38 mm
- Safety Torx: T10 & T15

#### **PRECISION** SCREWDRIVERS:

- Slotted:  $2.4 \times 75$  mm;  $3.0 \times 100$  mm,  $3.8 \times 150$  mm
- Phillips: #0 x 75 mm, #1 x 100 mm; #2 x 150 mm

#### Description Order #

15018

85-piece Master Electronic Tool Kit

Solder

Tape Measure

7/32", 7/16"

# 93-piece Premier Field Service Kit



A full complement of tools for maintaining, upgrading and repairing electronic equipment. Supplied in double-sided, durable nylon case with large external pockets.

Dimensions (LxWxH) 17"x12"x5.5"

Weight

13lbs. (with tools)

- - Cutters: 4 1/4" & 6" Diagonal
  - Desoldering Pump
- DIP IC Extractor DIP IC Inserter
- Feeler Gauge
- Flashlight, with batteries
- Hammer, 4 oz. Ball Pein
- Hex Key Set BP, 9-piece
- Hemostat, 5"
- Jeweler's Screwdrivers, 6-piece Phillips/Slotted
- Metal Scribe
- Microwick
- Mirror/Magnetic Retriever
- Needle Files, 3-piece
- Driver Handle 4"
- Nutdriver Blades, 9-piece: 3/4" 9/32", 3/8", 7/32", 5/16", 7/16", 1/4", 11/32", 1/2"
  • Punch Pins 1/16", 1/8"
- Ruler, 6" Stainless Steel
- Socket Set, 13-piece 1/4" Drive
- Solder Aid Kit, 3-piece
- Soldering Iron
- Scissors, Technik Electricians

- PLIERS:
- 41/2" Chain Nose Serrated

Wire Stripper 16-26 AWG

Wrench 6" Adjustable

6" Long Nose with Side Cutter

Spring Tool Combination, 2-piece

Wrench Set, Mini Ignition, 8-piece

- 5 3/4" Needle Nose
- 6" Slip Joint

#### SCREWDRIVERS:

- Slotted: 3/32" x 2", 3/8" x 4", 3/16" x 4", 1/4" x 4" Phillips: #0 x 2", #1 x 4", #2 x 4"
- Safety Torx: T10, T15, T20
- Stubby Slotted: 1/4"
- Stubby Phillips: #1
- Handle

#### TWEEZERS:

- 5" Sharp Point
- 41/2" Cross Lock

Order # Description

15006

93-piece Field Servcice Kit

# 85-piece Premier Service Engineer's Kit



For those that repair computers, copiers, and any other electronic equipment on-site. Double sided, durable nylon case with large external pockets.

Dimensions (LxWxH) 17"x12"x5.5"

Weight

11lbs. (with tools)

#### TOOLS:

- Alignment Tool
- Cutters: 4 1/2" Diagonal
- Desoldering Pump
- Flashlight, with batteries
- Hemostat, Technik 5"
- Hex Key Set Fold Up, 9-piece .050 to 3/16"
- Knife, Precision
- Metal Scribe
- Microwick
- Needle Files, 2-pieces
- Nutdriver Blades: 3/16", 9/32"
   3/8", 7/32", 5/16", 7/16", 1/4",
   11/32", 1/2"
- Prong Holder
- Ruler, 6" Stainless Steel Ruler
- Solder Aid Kit, 3-piece
- · Soldering Iron
- Solder

- · Scissors, Electricians
- Torx Key Set Fold Up, 7-piece T6 to T20
- Tweezers, 6" Cross lock
- Wire Stripper
- Wrench 6" Adjustable

#### PLIERS:

- 5" Needle Nose
- 6" Slip Joint
- 6" Long Nose with Wire Cutter
- 4 1/2" Chain Nose-Serrated

#### SCREWDRIVERS:

- Blades: Phillips #0, #1, #2
- Blades: Slotted 1/8", 3/16", 1/4"
- Phillips: #0 x 2"
- Slotted: 3/32" x 2"
- Jeweler's 6-piece Set

### Order # Description

15002

65-piece Service Engineer's Kit

### 48

# Precisio Tools

# 87-piece Premier General Electronic Tool Kit



Contains all the essential tools needed to access, troubleshoot and repair electronic equipment.

Dimensions (LxWxH) 15.5"x10.5"x5.5"

Weight 8lbs. (with tools)

#### TOOLS:

- Brush
- Cutter, 4 1/2" Diagonal
- Flashlight, with batteries
- Hex Keys Fold Up, 9-piece .050 to 3/16"
- Knife Snap Blade, 10-pieces
- Microwick
- Plastic Parts Box
- Rachet
- Ruler, 6" Stainless Steel
- Scissors, Electrician
- Socket Set, 9-piece
- Extension Bars: 4" and 6"
- Solder
- Soldering Iron

- Tape Measure 12'/3M
- Torx Fold Up, 7-piece T6 to T20
- Wire Stripper/Cutter
- Wrench Adjustable 6"

#### PLIERS:

- 6" Slip Joint
- 6" Long Nose with Wire Cutter
- 4 1/2" Long Nose Pliers with Cutter

#### SCREWDRIVERS:

- Phillips: #0 x 4", #1 x 4", #2 x 4"
- Slotted: 1/8" x 4", 3/16" x 4", 1/4" x 4"
- Jeweler's 6-piece Phillips & Slotted

# Order # Description

15001

**67-piece Premier General Electronic Kit** 

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

# 98-piece Premier Networking Tool Kit



Designed to address the specific requirements of maintaining and troubleshooting data links, LANs and WANS. Kit contains a complete selection of tools to access and troubleshoot a variety of equipment common to all networks.

Dimensions (LxWxH) 17"x12"x5.5"

Weight
11lbs. (with tools)

#### TOOLS:

- Alignment Tool
- Cable Cutter
- Cable Stripper, Coax
- Cable Tester, Multi Network
- RS232 to w12/45 Converter
- Crimp Tool, with (RG58 & RG59) die set
- Cutters 4 1/2" Diagonal
- Flashlight, with batteries
- Gender Changer: M/M & F/F
- Hex Key Set, 9-piece 5/64" to 1/4"
- Knife, Precision
- Mirror/Magnetic Retriever
- Modular Plugs (24): 4 & 8 Pos
- Nutdriver Blades, Interchangeable: 3/16", 1/4", 5/16"
- Plastic Parts Box (3)
- Pliers: 4 3/4" Long Nose -Serrated Jaws
- Punch Down Tool

- Receptacle Analyzer
- RJ45 Adapter Cable 14'
- Scissors, Electrician
- Solder
- Soldering Iron
- Wire Stripper 16 to 26 AWG
- Wrench 6" Adjustable

#### SCREWDRIVERS:

- Blades: Slotted 1/8", 3/16", 1/4"
- Blades: Phillips #0, #1, #2
- Blades: Torx T10, T15, T20

#### PRECISION SCREWDRIVERS:

- Slotted: 2.4 mm
- Phillips: #0

#### POCKET SCREWDRIVERS:

- Phillips #0
- Slotted 3/32"

| 15007   | 98-piece Premier Networking Tool Kit |
|---------|--------------------------------------|
| Order # | Description                          |

# 48-piece Premier Compact Technician's Kit



A compact version of our popular Technician's Kit, with 47 of the most requested tools in a durable nylon case.

Dimensions (LxWxH) 15.5"x10.5"x5.5" Weight 8lbs. (with tools)

#### TOOLS:

- Alignment Tools (3)
- Cutter, 4 1/2" Diagonal
- Desoldering Pump
- Driver Handle 4"
- Flashlight, with batteries
- Hex Key Set, 9-piece
- Knife Precision Blade
- Microwick
- Needle File Flat
- Nutdriver Blades:
   1/4", 5/16", 3/8"
- Ruler, 6" Stainless Steel
- Solder
- Solder Aid Kit, 6-piece

- Soldering Iron
- Wire Stripper/Cutter
- Wrench 4" Adjustable

#### SCREWDRIVERS:

- Blades: Slotted- 3/16", 1/4", 5/16"
- Blades: Phillips #1, #2
- Jeweler's, 6-piece Phillips and Slotted

#### **PLIERS**

- 6" Slip Joint
- 4 1/2" Chain Nose Smooth Jaws
- 5 1/2" Needle Nose
- 6" Long Nose with Wire Cutter

Order # Description

15004

48-piece Premier Compact Tech. Tool Kit

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

# 70-piece Premier Technician's Kit



Ideal for general electronic service, this kit contains tools commonly needed to get at the 'electronics,' including a socket set, an adjustable wrench, and locking pliers and much more.

Dimensions (LxWxH) 15.5"x10.5"x5.5"

Weight 8lbs. (with tools)

- Alignment Tools (3)
- Cutter, 4 1/2" Diagonal
- Desoldering Pump
- Flashlight, with batteries
- Hex Key Set, 9-piece
- Hemostat, 5"
- IC Inserter/Extractor
- Knife Precision Blade
- Microwick
- Mirror, Inspection
- Needle File Flat
- Nutdriver Blades: 1/4", 5/16", 3/8"
- Ruler, 6" Stainless Steel
- Scissors, Electrician
- Socket Set, 13-piece 1/4"
- Solder
- Spring Hook Tool (2)
- · Solder Aid Kit, 6-piece

- Soldering Iron
- Wire Stripper/Cutter
- Wrench 6" Adjustable

#### PLIERS:

- 5 3/4" Needle Nose-Serrated Jaws
- 4 1/2" Chain Nose-Serrated Jaws
- 6" Vise Grip
- 6" Long Nose with Wire Cutter

#### SCREWDRIVERS:

- Phillips: #0 x 21/2"
- Slotted: 3/32" x 2"
- Jeweler's, 6-piece Phillips and Slotted
- Blades: Slotted 3/16", 1/4", 5/16"
- Blades: Phillips #1, #2
- Screwdriver Handle Drive

#### Description Order #

70-piece Premier Technician's Kit 15003

# 55-piece Premier PC Technician's Tool Kit



This kit contains an assortment of tools for the "Pros" servicing computer systems, PC terminals, and peripherals.

Dimensions (LxWxH) 15.5"x10.5"x5.5"

Weight 6lbs. (with tools)

#### TOOLS:

- Alignment Tool
- Cable Ties
- Cutter, 4 1/2" Diagonal
- Driver handle 4"
- Flashlight, with batteries
- Gender Changers RS232 M/M, F/F
- IC Inserter/Extractor
- Nutdriver Blades: 3/16", 1/4", 5/16", 3/8"
- Needle Files (3)
- Parts Holder 3-Prong
- PLCC Removal Tool
- Pliers: 4 1/2" Chain Nose, Serrated

- Wrench, Adjustable 4"
- Wipes (6)
- Wire Stripper
- Wrist Strap

### HEX KEYS

- BP(8) .050 to 5/32"
- BP metric (6) 1.5 to 5 mm

#### SCREWDRIVERS:

- Phillips #00, #0, #1
- Slotted: 3/32", 1/8"
- Torx T8, T10, T15
- Blades: Slotted 1/8", 3/16", 1/4"
- Blades: Phillips #0, #1, #2

Order #

Description

15005

55-piece Premier PC Technician's Kit

50

# 22-piece Personal Computer Tool Kit



Dimensions (LxWxH) 13"x8"x2.5"

Weight 3lbs. (with tools)

A compact tool kit, which has all the necessary tools for performing routine upgrades, maintenance, and repairs on PCs, Macs and workstations, in an attractive and durable case.

#### TOOLS:

- 3-Prong Holder
- Brush
- Crimp Tool, 7 in 1
- Desoldering Pump
- IC Extraction Tool
- IC Insertion Tool
- Nutdrivers: 5 mm, & 6 mm
- Pliers, 5" Long Nose
- Solder

- Soldering Iron, 30W Ceramic
- Tweezer, Stainless
- Wrench 6" Adjustable
- Wrist Strap, Anti-static

#### SCREWDRIVERS:

- Slotted: 3 x 75 mm, 5 x 75 mm
- Phillips: #0 x 75 mm, #1 x 75 mm
- Safety Torx: T10, T15

Order # Description

15014 22-piece Personal Computer Tool Kit

All the essential tools to maintain and service computer networks, in

# 22-piece Network Maintenance Kit



Dimensions (LxWxH) 15"x10"x3"

14"x9"x2.5"

Weight 6lbs. (with tools)

6lbs. (with tools)

a durable case.

- Cable Stripper, Rotary Coaxial
- Crimping Tool for 4, 6, & 8 position line cords
- Cutter, 4.5" Diagonal
- Desoldering Pump
- Flashlight, Mini
- Forcep, 6" Straight
- Hex Key Set 7-piece
- IC Extractor
- Inspection Mirror

15021

- Nutdrivers: 5 mm & 6 mm
- Pliers, 5" Long Nose
- Soldering Iron, 30W Ceramic
- Wire Stripper (AWG 20-30)

#### SCREWDRIVERS:

- Slotted: 3 x 75 mm, 5 x 75 mm, 6 x 100 mm
- Phillips: #0 x 75 mm, #1 x 75mm, #2 x 100 mm
- Torx: T10, T15, T20

Order #

ř

22-piece Network Maintenance Kit

# 22-piece Basic Electronic Tool Kit



Contains the essential tools needed to access, troubleshoot, and repair electronic equipment, supplied in an attractive durable case.

Description

#### TOOLS:

- Alignment Driver
- Cutter, 6" Diagonal
- Desoldering Pump
- Needle File Set, 2-piece, Round and Flat
- Nutdrivers: 5 mm & 6 mm
- Solder
- Soldering Iron, 30W Ceramic
- Solder Wick
- Tape, PVC Insulated

- Tweezer, Stainless
- Wrench 6" Adjustable

#### **PLIERS**

- 6" Long Nose
- 6" Combination

#### SCREWDRIVERS:

- Slotted: 3 x 75 mm, 5 x 75 mm, 6 x 100 mm
- Phillips: #0 x 75 mm, #1 x 75 mm, #2 x 100 mm, #2 x 200 mm

Order # Description

15019 22-piece Basic Electronic Tool Kit

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108
Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com



# Aven Tronex Series High Precision Pliers and Cutters

made in the USA

Cutting Edge Technology provides you with superior levels of cutting performance, quality, value and comfort.

- Highest quality American made 1% carbon alloy steel is used for exceptional hardness and toughness. Tools are engineered for precision cutting yet long lasting ruggedness. These tools have the heft and feel that of a luxury car.
- Special Handles both standard and long are ergonomically designed to fit most hands with no points of pressure. They are enhanced by soft cushion grips for maximum comfort to reduce cutting fatigue dramatically.
- Exceptional Cutting Edges. They are made with by using a proprietary dual sharpening process and then raised to optimum hardness and toughness through a induction heating and tempering process. The result: Sharp, hard and tough cutting edges outcut and outlast all others.
- Superior Joint System: Two halves of the tool are joined by a fine thread interlocking screw and nut which mount on precision machined bearing rings. This ensures a tight, perfect alignment with smooth consistent cutting.

- Cutters are available in Semi-Flush, Flush and Razor Flush cutting edges.
- Attractive satin coating protects against corrosion and reduces glare.
- Stainless steel double leaf springs
- ESD Safe cushion grips for exceptional comfort
- Available in Standard and Ergonomic handle lengths. Length of tool with standard handle: 115mm (4-1/2") and with ergonomic handle: 140mm (5-1/2")
- 100% Quality assurance:- Each cutter is checked individually at the factory and are warranted for be free of defects in materials and workmanship for the life of the tool



recision
Tools

52

Ergonomic Handle
140mm (5.5")

Standard Handle

4595 Peo Road Ann Arbor, MI 48108

Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

# **Tronex Series - High Precision Cutters**


### Tronex Oval Head Cutter



Strong versatile and long lasting, this popular shape can be used for many applications. Designed to be durable through hundreds of thousands of cuts.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity* |
|-----------------|------------------|--------------|-------------------|
| 5111            | 7111             | Semi-Flush   | .20 to 1.20mm     |
| 5112            | 7112             | Flush        | .15 to 1.50mm     |
| 5113            | 7113             | Razor Flush™ | .10 to 1.00mm     |


### Tronex Oval Head Cutter with Relief



Same features as the oval head cutter but the relief provides extra accessibility.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity* |
|-----------------|------------------|--------------|-------------------|
| 5121            | 7121             | Semi-Flush   | .20 to 1.20mm     |
| 5122            | 7122             | Flush        | .15 to 1.10mm     |
| 5123            | 7123             | Razor Flush™ | .10 to 0.90mm     |


### Tronex Large Oval Head Cutter



Popular for wire and cable, extra rugged, 25% larger head than standard oval cutters.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity* |
|-----------------|------------------|--------------|-------------------|
| 5511            | 7511             | Semi-Flush   | .20 to 1.50mm     |
| 5512            | 7512             | Flush        | .15 to 1.50mm     |
| 5513            | <i>7</i> 513     | Razor Flush™ | .10 to 1.20mm     |

# Tronex Large Oval Head Cutter with Relief



Same features as the large oval head cutter but the relief provides extra accessibility.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity* |
|-----------------|------------------|--------------|-------------------|
| 5521            | 7521             | Semi-Flush   | .20 to 1.40mm     |
| 5522            | 7522             | Flush        | .15 to 1.40mm     |
| 5523            | 7523             | Razor Flush™ | .10 to 1.20mm     |

# Tronex Tapered Head Cutter



A more compact design pointed head for increased operator access, yet covers a wide cutting range and long tool life.


| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity* |
|-----------------|------------------|--------------|-------------------|
| 5211            | 7211             | Semi-Flush   | .20 to 1.10mm     |
| 5212            | 7212             | Flush        | .15 to 1.10mm     |
| 5213            | 7213             | Razor Flush™ | .10 to 1.00mm     |

\*Diameter of Soft Copper wire



# Tronex Series - High Precision Cutters


### Tronex Tapered Head Cutter with Relief



Same features as the tapered head cutter but with a lower profile for better access and extra visibility.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity* |
|-----------------|------------------|--------------|-------------------|
| 5221            | 7221             | Semi-Flush   | .20 to 1.10mm     |
| 5222            | 7222             | Flush        | .15 to 1.00mm     |
| 5223            | 7223             | Razor Flush™ | .10 to 0.90mm     |

# Tronex Miniature Oval Head Cutter



SMT Cutter, 30% smaller head than standard oval cutters.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity* |
|-----------------|------------------|--------------|-------------------|
| 5311            | 7311             | Semi-Flush   | .20 to 1.10mm     |
| 5312            | 7312             | Flush        | .10 to 1.00mm     |
| 5313            | 7313             | Razor Flush™ | .10 to 0.80mm     |

# Tronex Minature Tapered Head Cutter

Precision Tools

Miniature Taper Relief cutters are used only for exceptionally fine cutting work. Usually access to the cutting area is difficult, requiring the very low profile of this cutter with full relief.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity* |
|-----------------|------------------|--------------|-------------------|
| 5421            | 7421             | Semi-Flush   | .20 to 1.10mm     |
| 5422            | 7422             | Flush        | .10 to 1.00mm     |
| 5423            | 7423             | Razor Flush™ | .10 to 0.80mm     |

# Tronex Tip Cutter High Relief



Tip cutter with a deep relief for an exceptionally low profile. Short sturdy jaw. Razor Flush™ cutting Edges.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity |
|-----------------|------------------|--------------|------------------|
| 5049            | 7049             | Razor Flush™ | .10 to 0.65mm    |

# Tronex Small Tip Cutter



Most popular tip cutter. Jaw is twice as long as standard cutters. Jaw is slim with a low relieved profile. Razor Flush™ cutting edges.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity |
|-----------------|------------------|--------------|------------------|
| 5070            | 7070             | Razor Flush™ | .10 to 0.65mm    |

# Tronex Series - High Precision Cutters

# Tronex Subminiature Tip Cutter



SMT Cutter. Extraordinarily small. Fine cutting edges and fine tip. Often used under a microscope. Removes individual leads from fine pitch components. Razor Flush™ Cutting Edges.

| Standard Handle | Ergonomic Handle | Cutting Edge | <b>Cutting Capacity</b> |
|-----------------|------------------|--------------|-------------------------|
| 5071            | 7071             | Razor Flush™ | .05 to 0.40mm           |

# Tronex Angulated Miniature 50° Cutter



An SMT cutter with a very small cutting head. Used for exceptionally fine cutting. Relieved for maximum accessibility. Flush cutting edges.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity |
|-----------------|------------------|--------------|------------------|
| 5075            | 7075             | Flush        | .10 to 0.65mm    |

# Tronex Angulated Small 50° Cutter



Most popular angulated cutter. Small cutting head with relief for excellent visibility. Durability combined with fine cutting. Flush cutting edges.

| Standard Handle | Ergonomic Handle | Cutting Edge | <b>Cutting Capacity</b> |
|-----------------|------------------|--------------|-------------------------|
| 5082            | 7082             | Flush        | .10 to 0.65mm           |

# Tronex Angulated Large 50° Cutter



Largest cutting head. Robust. Excellent in cutting several leads in a single cut. Relieved for enhanced visibility. Razor Flush™ cutting edges.

| Standard Handle | Ergonomic Handle | Cutting Edge | Cutting Capacity |
|-----------------|------------------|--------------|------------------|
| 5072            | 7072             | Razor Flush™ | .10 to 0.65mm    |

# Tronex Heavy Duty Cutter



This cutter, forged of carbon steel, has strength in the head and joint areas needed to cut heavier gauge wire or cable. Cushion grips provide operator comfort. A jaw restraining device is attached to insure spring retention. Overall length 6" (152mm). Length of cutting blade 3/4" (19mm)

| 1 | Standard Handle | Ergonomic Handle | Cutting Edge | <b>Cutting Capacity</b> |
|---|-----------------|------------------|--------------|-------------------------|
| I | -               | 7812             | Flush        | .10 to 1.60mm           |

\*Diameter of Soft Copper wire

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com



56

# Tronex Series - High Precision Pliers

# Tronex Chain Nose Pliers: Standard and Short Jaw



Features very fine tips, "eased" edges of the inner jaw to reduce the risk of damage to the workpiece during forming, and a long jaw for extended gripping power. Available with smooth or serrated jaws. Standard & Short Chain nose pliers have tips dimension of 1.2mm W x 1.4mm H (.050" x .060").

| Standard Handle | Ergonomic Handle | Jaw Type          | Jaw Length   |
|-----------------|------------------|-------------------|--------------|
| 511             | 711              | Standard Smooth   | 33mm (1.30") |
| 512             | 712              | Standard Serrated | 33mm (1.30") |
| 513             | 713              | Short Smooth      | 19mm (0.75") |

# Tronex Needle Nose Pliers



These pliers have exceptionally fine tips. The outer surface of the jaw is rounded to the shape of smooth half cones. This design increases tool access and allows forming of round loops. All edges of the inner jaws are eased. Tip dimensions: 1.0mm W x 1.2mm H. (  $.040^{\prime\prime}$  x  $.050^{\prime\prime}$  ).

| Standard Handle | Ergonomic Handle | Jaw Type | Jaw Length     |
|-----------------|------------------|----------|----------------|
| 521             | 721              | Smooth   | 31.7mm (1.25") |

# Fronex Round Nose Pliers: Standard and Short Jaw



Available in long and short jaws. The long jaws makes it possible to form a wide range of loop diameters. The short jaw adds more stiffness and strength to allow forming of heavier gauge wire with added control. Long jaw pliers have a tip diameter of 0.7mm( .030") and the short jaw pliers have a tip diameter of 0.9mm (.035").

| Standard Handle | Ergonomic Handle | Jaw Type | Jaw Length     |
|-----------------|------------------|----------|----------------|
| 531             | 731              | Smooth   | 31.7mm (1.25") |
| 532             | 732              | Smooth   | 18.1mm (.715") |

# Tronex Flat Nose Pliers: Standard and Wide Tips



These flat nose pliers have a long jaw and very thin tips. The tip gripping area has a smooth finish. All inner edges are "eased" to reduce risk of workpiece damage. Standard flat nose pliers have tips that are 3.5mm (.140") wide and the Wide Tip Flat Nose Pliers have tips that are 6.3mm (.250") wide.

| Standard Handle | Ergonomic Handle | Jaw Type        | Jaw Length     |
|-----------------|------------------|-----------------|----------------|
| 541             | 741              | Standard Smooth | 31.7mm (1.25") |
| 542             | 742              | Wide Smooth     | 31.7mm (1.25") |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

# **Ergo Pliers & Cutters**

- Scientifically designed handles to provide exceptional comfort
- Manufactured from Stainless Steel, will not rust
- Non Reflective Black Finish
- Dual Leaf Springs
- Induction Hardened Cutting Edges






# Ergo Pliers & Cutters

### Chain Nose Pliers





Ideal for forming, bending and precision assembly work.

| Order #  | Description                                      |
|----------|--|
| 10301-ER | 4.5" Chain Nose, Smooth Jaws: 0.93" Jaw Length   |
| 10307-ER | 4.5" Chain Nose, Serrated Jaws: 0.93" Jaw Length |
| 10302-ER | 5" Chain Nose, Smooth Jaws: 1.05" Jaw Length     |
| 10308-ER | 5" Chain Nose, Serrated Jaws: 1.05" Jaw Length   |

# Extra Long Chain Nose Pliers






Head Dimensions: A-1.42" B-.05" D-.07" E-.25"

Excellent for hard to reach areas.

| Order #   | Description  |  |
|-----------|--|--|
| 10311-ER  | <b>5" Extra Long Chain Nose</b><br>Smooth Jaws: 1.42" Jaw Length   |  |
| 10311S-ER | <b>5" Extra Long Chain Nose</b><br>Serrated Jaws: 1.42" Jaw Length |  |

Needle Nose Pliers





Head Dimensions: A-1.93" B-.04" D-.06" E-.22"

Ideal for work in tight places where space and accessibility are limited.


| Order #  | Description  |
|----------|--|
| 10314-ER | <b>5-3/4" Needle Nose</b><br>Serrated Jaws: 1.93" Jaw Length |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

# **Ergo Pliers & Cutters**

# Oval Head Cutters






| Harat Discountings |
|--------------------|
| Head Dimensions:   |
| A                  |
| A55" B-13° E28"    |

| Order #  | Description   |
|----------|---|
| 10321-ER | 4-1/2" Oval Head Cutter, Semi-Flush<br>Cutting Capacity: 22 AWG, CBL: 0.55" |
| 10323-ER | 4-1/2" Oval Head Cutter, Flush Cutting Capacity: 24 AWG, CBL: 0.55"         |
| 10332-ER | 4-3/8" Mini Oval Head Cutter, Flush Cutting Capacity: 24 AWG, CBL: 0.45"    |

# Tapered Head Cutters






| Order #  | Description  |
|----------|--|
| 10325-ER | 4-1/2" Tapered Head Cutter, Semi-Flush<br>Cutting Capacity: 22 AWG, CBL: 0.55" |
| 10326-ER | 4-1/2" Tapered Head Cutter, Flush Cutting Capacity: 24 AWG, CBL: 0.55"         |
| 10331-ER | 4-3/8" Mini Tapered Head Cutter, Flush Cutting Capacity: 24 AWG, CBL: 0.45"    |

# Tapered Head Cutter w/Relieved Head






| 1, 1, 6, 7       |
|------------------|
| Head Dimensions: |
| A55" B05"        |
| D-13° E28"       |

| Order #  | Description   |
|----------|---|
| 10329-ER | 4-1/2" Tapered Head Cutter, RH, Flush<br>Cutting Capacity: 24 AWG, CBL: 0.55" |

Tip Cutter





| Order #  | Description                                       |
|----------|---|
| 10330-ER | 4-1/2" Tip Cutter, Flush Cutting Capacity: 24 AWG |

<sup>\*</sup> Cutting Capacity stated aboove is for soft copper wire



- Mirror Polished Stainless Steel
- **ESD** Safe Grips
- Box Joint Construction
- Dual Leaf Springs For Comfortable Action
- Induction Hardened Cutting Edges
- Large Selection




60

recision
Tools

### Stainless Steel Pliers



Head Dimensions: A- .93" B-.04" D-.06" E-.21"




Technik 4-1/2" Chain Nose – Ideal for forming, bending and precision assembly work.

| Order # | Description                         |
|---------|-------------------------------------|
| 10301   | Technik 4-1/2" Chain Nose, Smooth   |
| 10307   | Technik 4-1/2" Chain Nose, Serrated |



Head Dimensions: A-1.05" B-.04" D-.06" E-.39"




Technik 5" Chain Nose - Popular pliers for forming, bending and precision assembly work.

| Order # | Description                     |
|---------|---------------------------------|
| 10302   | Technik 5" Chain Nose, Smooth   |
| 10308   | Technik 5" Chain Nose, Serrated |



Head Dimensions: A-1.53" B-.06" D-.08" E-.38"



Technik 6" Chain Nose - For forming, bending and component handling.

| 10333 Technik 6" Chain Nose, Serrated |  |
|---------------------------------------|--|
|---------------------------------------|--|



Head Dimensions: A-1.42" B-.05" D-.07" E-.25"



Technik 5" Extra Long Chain Nose – For forming, bending and precision assembly work. Excellent for difficult to reach areas.

| Order # | Description                                |
|---------|--|
| 10311   | Technik 5" Extra Long Chain Nose, Smooth   |
| 103115  | Technik 5" Extra Long Chain Nose, Serrated |



Head Dimensions: A-.94" B-.02" D-.15" E-.24"




Technik 4-1/2" Flat Nose – For bending and component handling.

| Drasr # | Description                   |  |
|---------|-------------------------------|--|
| 10303   | Technik 6" Chain Nose, Smooth |  |



A-.94" B-.02" D-.15" E-.24"



Technik 5" Flat Nose - For bending and component handling.

| 10304 | Description                  |  |
|-------|------------------------------|--|
| 10304 | Technik 5" Flat Nose, Smooth |  |



### Stainless Steel Pliers



Head Dimensions: A-1.66" B-.02" D-.21" E-.33"



Technik 6" Flat Nose - For bending and component handling.

| 10335   | Technik 6" Flat Nose, Smooth |
|---------|------------------------------|
| Order # | Description                  |



Head Dimensions: A-.84" B-.05" D-.04" E-.25"



Technik 4-1/2" Round Nose - For forming or coiling fine wire.

| Order # | Description                       |  |
|---------|-----------------------------------|--|
| 10305   | Technik 4-1/2" Round Nose, Smooth |  |



Head Dimensions: A-.93" B-.05" D-.04" E-.31"




Technik 5" Round Nose - For forming or coiling fine wire.





Technik 6" Round Nose - For forming or coiling fine wire.

| Order # | Description                   |  |
|---------|-------------------------------|--|
| 10334   | Technik 6" Round Nose, Smooth |  |



Technik 4-1/2" Bent Nose - For working in confined areas.


| 10310   | Technik 4-1/2" Bent Nose, Serrated |
|---------|------------------------------------|
| 10309   | Technik 4-1/2" Bent Nose, Smooth   |
| Order # | Description                        |



Technik 5" Extra Long Bent Nose - For working in confined, difficult to reach areas.

| Order # | Description                             |
|---------|---|
| 10312   | Technik 5" Extra Long Bent Nose, Smooth |

### Stainless Steel Pliers



#### Technik 6" Curved Needle Nose (75°)

- Designed for working in out of the way, confined areas.
- Thin bent nose with tapered jaws.

Lap joint construction.

| 10953   | Technik 6" Curved Needle Nose (75°), Serrated |
|---------|---|
| Order # | Description                                   |



Technik 6" Extra Long Bent Nose – For confined areas and

|           | 10313   | Technik 6" Extra Long Bent Nose, Smooth |  |
|-----------|---------|---|--|
| ditticult | order # | Description                             |  |



Technik 4-3/4" Long Nose with Cutter – General purpose plier with built in cutting blades.

| 10315   | Technik 4-3/4" Long Nose with Cutter, Serrated |
|---------|--|
| Order # | Description                                    |



Technik 5-3/4" Needle Nose - Designed for light work where space and accessibility are limited.

| 10314   | Technik 5-3/4" Needle Nose, Serrated |
|---------|--------------------------------------|
| Order # | Description                          |

# Stainless Steel Cutters






Technik 4-1/2" Standard Oval Head Cutter

| Order # | Description   |
|---------|---|
| 10321   | Technik 4-1/2" Standard Oval Head Cutter,<br>Semi-Flush, Cutting Capacity: 22 AWG Soft Wire |
| 10323   | Technik 4-1/2" Standard Oval Head Cutter,<br>Flush, Cutting Capacity: 24 AWG Soft Wire      |

Head Dimensions: A-.55" B-13° E-.28"








Technik 5" Standard Oval Head Cutter

| Order # | Description   |
|---------|---|
| 10322   | Technik 5" Standard Oval Head Cutter,<br>Semi-Flush, Cutting Capacity: 20 AWG Soft Wire |
| 10324   | Technik 5" Standard Oval Head Cutter,<br>Flush, Cutting Capacity: 22 AWG Soft Wire      |

### Stainless Steel Cutters



#### Technik 4-1/2" Standard Tapered Head Cutter

| Order # | Description   |
|---------|---|
| 10325   | Technik 4-1/2" Standard Tapered Head Cutter<br>Semi-Flush, Cutting Capacity: 22 AWG Soft Wire |
| 10326   | Technik 4-1/2" Standard Tapered Head Cutter Flush, Cutting Capacity: 24 AWG Soft Wire         |



Technik 4-1/2" Standard Tapered Relieved Head Cutter

Order # Description Technik 4-1/2" Standard Tapered Relieved Head 10329 Cutter Flush, Cutting Capacity: 24 AWG Soft Wire



Technik 4-3/8" Mini Oval Head Cutter

| Order # | Description   |
|---------|---|
| 10332   | Technik 4-3/8" Mini Oval Head Cutter<br>Flush, Cutting Capacity: 24 AWG Soft Wire |






Technik 4-3/8" Mini Tapered Head Cutter

| Order # | Description  |
|---------|--|
| 10331   | Technik 4-3/8" Mini Tapered Head Cutter<br>Flush, Cutting Capacity: 24 AWG Soft Wire |

A-.45" B-.04" D-17° E-.23"



Technik 4-1/2" Tip Cutter

| Order # | Description  |
|---------|--|
| 10330   | Technik 4-1/2" Tip Cutter<br>Flush, Cutting Capacity: 24 AWG Soft Wire |

Head Dimensions: A-.87" B-.05" D-.07" E-.23"





Technik 4-1/2" End Cutter

| Order # | Description   |
|---------|---|
| 10327   | Technik 4-1/2" End Cutter<br>Semi-Flush, Cutting Capacity: 22 AWG Soft Wire |

Head Dimensions: A-.69" B-.39"



Technik 4-1/2" Oblique Cutter

| Order # | Description   |
|---------|---|
| 10328   | Technik 4-1/2" Oblique Cutter<br>Semi-Flush, Cutting Capacity: 22 AWG Soft Wire |

Head Dimensions: A-.71" B-.38" D-8°


# **Niptec Cutters**

- Manufactured from a special carbon alloy steel, heat treated in a controlled environment for optimum hardness. Has an anti-glare finish to improve work accuracy.
- Niptec Cutters can be distinguished from their competitors by their smooth cutting action with less force, due to the specially designed return spring.
- Our 5000 Series Cutters manufactured with 5mm thick cutting blades are recommended for applications requiring highly durable and long lasting cutters.



# **Niptec Cutters**

# Niptec 5000 Series




TR 5000 / TR 5000R – Long lasting cutting blades, 5mm thick. TR 5000 produces a semi flush cut and TR 5000 R a clean flush cut. Both have ESD safe handles.

| Order # | Description  |
|---------|--|
| 10501   | TR 5000<br>Semi-Flush, Cutting Capacity: 12 AWG Steel Wire |
| 10502   | TR 5000 R Flush, Cutting Capacity: 14 AWG Steel Wire       |




66



TR 5000 PG – Pointed long lasting cutting blades, allowing access into tight places. Cutting edges are rounded and well finished. 5mm thick, flush cutting blades. Has ESD safe handles.

| Order # | Description   |
|---------|---|
| 10503   | TR 5000 PG Flush, Cutting Capacity: 16 AWG Steel Wire |




TRR 5000 – Specially designed blades to cut steel wire up to a diameter of 0.5mm / 24 AWG, 10 AWG copper wire 5mm, flush cutting blades. Has ESD safe handles.

| Order # | Description  |
|---------|--|
| 10504   | TRR 5000<br>Flush, Cutting Capacity: 24 AWG Steel Wire |

# Niptec 1000 Series





TR 25 E – Our most popular and economical cutter. Has a narrow cutting head for greater access into dense areas. Produces a clean flush cut. Tool handles have regular blue non-slip grips.


| Order # | Description   |
|---------|---|
| 10521EC | TR 25 E<br>Flush, Cutting Capacity: 16 AWG Steel Wire |

\* Dimmensions in mm.

# **Niptec Cutters**

### Niptec 1000 Series






TR 25 – A very popular tool. Light weight and easy to handle with narrow cutting head for access into dense areas. Produces a clean flush cut. ESD safe handles.

| Order # | Description                                      |  |
|---------|--|--|
| 10521   | TR 25 Flush, Cutting Capacity: 18 AWG Steel Wire |  |






TR 30 15 – Specially designed tool for cutting wires a certain length from the surface. TR 30 15 cuts 1.5mm from the surface. Produces a clean flush cut and has ESD safe handles.

| Order # | Description   |  |
|---------|---|--|
| 10523H  | TR 30 15 Flush, Cutting Capacity: 16 AWG Steel Wire |  |

# Niptec 1000 Micro Series






TR 20 M - Small head design allows access into tight places. Produces a clean flush cut. ESD safe handles.

| Order # | Description  |  |
|---------|--|--|
| 10527В  | TR 20 M Flush, Cutting Capacity: 20 AWG Steel Wire |  |





TR-20-50 M - Has the same features as our TR 20 M but the cutting angle is 48° instead of 21°. Ideal for reaching into difficult places. Has ESD safe handles.

| Order # | Description  |
|---------|--|
| 10525   | TR-20-50 M<br>Flush, Cutting Capacity: 22 AWG Steel Wire |



TR 20 TM – Specially designed for cutting integrated circuit pins. The very small size of the cutting blades angled at  $45\,^\circ$  enables closely placed pins to be cut. Produces a flush cut. Has ESD safe handles.

| Ordar # | Description   |  |
|---------|---|--|
| 10526   | TR 20 TM Flush, Cutting Capacity: 22 AWG Steel Wire |  |




# **Parallel Action Pliers**

The unique compound joint design allows the jaws to open and close parallel to one another. This makes them ideal for holding and gripping components and manipulating wire. Comes with anti-rust finish with bright nickel sealed handles and smooth fully heat-treated black jaws for durability.



non-parallel





parallel

### Flat Nose with Wire Cutter



Flat nose pliers with a wire cutter. Has serrated jaws with a v-slot. Model 10761 has a maximum jaw opening of 0.4'' (10mm) and a soft wire cutting capacity of 0.1''/2.5mm. Model 10764 has a jaw opening of 0.7''/17mm and a soft wire cutting capacity of 0.24'' (6.0mm).

| Order # | Description   |  |
|---------|---|--|
| 10761   | 5" Flat Nose with Wire Cutter Jaw Length: 1 6/16"/35mm Jaw Width: 1/4"/6.4mm    |  |
| 10764   | 8" Flat Nose with Wire Cutter Jaw Length:1 10/16"/41mm Jaw Width: 1 1/2"/12.5mm |  |

68

Tools

Flat Nose



The 8" Flat Nose plier has serrated jaws with a v-slot that allows you to feed wire down the throat of the plier and hold it firmly in place. The plier has a maximum jaw opening of 0.7" (17mm).

| Order # | Description  |  |
|---------|--|--|
| 10756   | 8" Flat Nose<br>Jaw Length: 1 10/16"/41mm Jaw Width: 1 10/16"/41mm |  |

# Compound Action 6-1/2" Diagonal Cutter



The essential feature of these diagonal cutters is the accuracy of the cutting edges and the quality of the steel and heat treatment. The compound lever design gives good mechanical advantages allowing the pliers to cut piano wire with handle loads significantly less than conventional forged pliers of equivalent size.

| Order # | Description  |
|---------|--|
| 10754   | Compound Action 6-1/2" Diagonal Cutter Jaw Type: Semi-Flush Cutting Capacity: 2mm Piano Wire |

69

# **Precision Tweezers**

Precision tweezers to meet applications in electronics, aircraft and aerospace, miniature assembly, precision engineering, optics, microscopy, etc.



- Large selection in a variety of materials
- Special coatings for custom applications
- Custom designs



# **Precision Tweezers**

We Offer a Wide Variety of Tweezers To Meet a Broad Range Of Applications and 2 Different Quality Grades.

#### In order to choose the best tool for your application:

- 1. Determine the type of points best suited for your application.
- 2. Refer to the material guide below and select the correct material for your application.
- 3. Determine the quality level required for your application if applicable. (Table 1)
- 4. Remember there is a trade-off between hardness, magnetism and corrosion resistance. (Table 2)

#### Quality Grades (Table 1)

# Brand Recommend For: Accutek ★★★★ With soft tension with accurately finished points. Recommended for work under high power magnification aerospace and micro electronics and in applications where high precision is required. All Accutek precision tweezers are made from anti-acid, anti-magnetic stainless steel. Technik Finely crafted tweezers. Anti-glare finish to reduce eye strain. Hand finished points for accuracy. Recommended for micro electronics and precision assembly.

#### Material Selection Guide (Table 2)

| Material  | Tip Hardness | Magnetism              | Corrosion Resistance     |
|---|--------------|------------------------|--------------------------|
| Carbon Steel                                    | Excellent    | Yes                    | Low                      |
| Stainless Steel                                 | Very Good    | Some                   | Good                     |
| Stainless Steel,<br>Anti-magnetic,<br>Anti-acid | Good         | None to<br>very little | Excellent, Resists Acids |
| Carbon Composite                                | Soft         | None                   | Non Corrosive            |

**Ceramic** ESD Safe, non magnetic. Resists all chemicals except hydrofluoric acids. Withstands temperatures up to 900°F. Heat sink fighter. For more details on the features of our ceramic tweezers please refer to page 80.

**Plastic** We offer static dissipative plastic tweezers. Plastic tweezers are non magnetic, resist virtually all commercial solvents. Non absorbent and easy to clean. Tips are non marring.

Carpenter 20, Nickel, Titanium, Beryllium, Copper & Brass: Available on special order.

#### Special Coatings (Available on non magnetic steel only)

| •                 |   |
|-------------------|---|
| TE - Teflon       | Superior anti-scratch, non-stick material. Acid resistant. 400°F/200°C              |
| EP - Epoxy        | Good electrical insulation and resistance to chemicals. Antiglare. 300°F/150°C      |
| RY - Ryton        | Very smooth. Excellent resistance to chemicals and temperature.                     |
| PY - Pyron        | Water and solder repellent. Non conductive 950°F/500°C                              |
| GP - Gold Plating | Very high corrosion resistance. Smooth anti-scratch, anti-glare, no tarnish finish. |

<sup>\*</sup> To order tweezers with above mentioned coatings, please add the symbol to the order #.

\* Call AVEN for price and delivery time.

## Straight: Thick, Flat, Strong Tips

Pattern OO Flat edges, heavy-duty strong blades tapering to regular strong points. Length: 4 3/4" 120mm

| Order #   | Description   |      |
|-----------|---|------|
| 18032 ACU | Accutek Pattern OO<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18032 USA | Technik Pattern OO<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

Pattern OOD Same as OO with serrated tips and grips. Length: 4 3/4" 120mm

| Order #   | Description  |      |
|-----------|--|------|
| 18037 ACU | Accutek Pattern OOD<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18037 USA | Technik Pattern OOD<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |
| 18036     | Aven Pattern OOD Carbon Steel, Nickel/Chrome Plated              | ***  |

Pattern OOC Same as OO except shorter. Length: 4 1/2" 115mm

| Order # | Description   |     |
|---------|---|-----|
| 18034   | Aven Pattern OOC<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |

Pattern AC Sturdy tips for bending and handling very fine wire and components. Has finger serrations. Length: 4 3/4" 120mm

| Order # | Description   |     |
|---------|---|-----|
| 18014   | Aven Pattern AC Carbon Steel, Nickel/Chrome Plated        | *** |
| 18016   | Aven Pattern AC Stainless Steel, Anti-Magnetic, Anti-Acid | *** |

## Straight: Strong Precise Tips

Pattern AA For general assembly, very strong and precise tips with fine finish. Length: 5" 130mm


| Order #   | Description   |     |
|-----------|---|-----|
| 18013 USA | Technik Pattern AA<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |
| 18011     | Aven Pattern AA Carbon Steel, Nickel/Chrome Plated              | *** |

Pattern MM Economical general-purpose tweezers slightly larger than AA. Length: 5" 130mm

| Order #   | Description   |     |
|-----------|---|-----|
| 18023 USA | Technik Pattern MM<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |
| 18021     | Aven Pattern MM<br>Carbon Steel, Nickel/Chrome Plated           | *** |

\*USA – Ultra Satin Anti-glare Finish

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

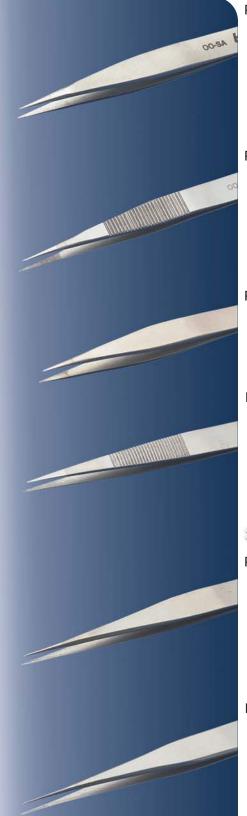





### Straight: Fine Tips

Pattern O Fine straight point tweezers for general handling and positioning of miniature parts or fine wire. Length: 4-3/4" 120mm

| Order #   | Description  |      |
|-----------|--|------|
| 18026 ACU | Accutek Pattern O<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18026     | Aven Pattern O<br>Stainless Steel, Anti-Magnetic, Anti-Acid    | ***  |

Pattern OC Flat edges, fine tips and short. Length: 3-1/2" 90mm

| Order #   | Description   |      |
|-----------|---|------|
| 18029 ACU | Accutek Pattern OC<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18029     | Aven Pattern OC<br>Stainless Steel, Anti-Magnetic, Anti-Acid    | ***  |

Pattern OA Straight point tweezers with radius edges. Designed for dense areas. Length: 4-3/4" 120mm

| Order # | Description   |     |
|---------|---|-----|
| 18027   | Aven Pattern OA Stainless Steel, Anti-Magnetic, Anti-Acid | *** |

Pattern SS Extra long and narrow straight point tweezers. Provides extended reach and access to confined areas. Length: 5-1/2" 140mm

| Order #   | Description   |      |
|-----------|---|------|
| 18040 ACU | Accutek Pattern SS<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18040 USA | Technik Pattern SS<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

Pattern 1 General use, strong blades with fine points. Length: 4-3/4" 120mm

|   | Order #  | Description  |      |
|---|----------|--|------|
| 1 | 8043 ACU | Accutek Pattern 1<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 1 | 8043 USA | Technik Pattern 1<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

### Straight: Ultra Fine Tips

Pattern 3 Extra long and narrow straight point tweezers. Provides extended reach and access to confined areas. Length: 4-3/4" 120mm

| Order #   | Description  |      |
|-----------|--|------|
| 18053 ACU | Accutek Pattern 3<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18053 USA | Technik Pattern 3<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

\*USA – Ultra Satin Anti-glare Finish

### Straight: Ultra Fine Tips

Pattern 3C Same as 3 but shorter. Length: 4-1/4" 110mm

| Order #   | Description   |      |
|-----------|---|------|
| 18056 ACU | Accutek Pattern 3C<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18056 USA | Technik Pattern 3C<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |
| 18054     | Aven Pattern 3C<br>Carbon Steel, Nickel/Chrome Plated           | ***  |

Pattern 3F Tips touch over 3mm for holding tiny wires. Length: 4-3/4" 120mm

| 18079 ACU   | Accutek Pattern 3F                        | *** |
|-------------|---|-----|
| 1007 7 7100 | Stainless Steel, Anti-Magnetic, Anti-Acid |     |

### Straight: Strong Sharp Tips

Pattern 2 Tapered point for bending and handling of small wires and parts. Length: 4-3/4" 120mm

| Order #   | Description  |      |
|-----------|--|------|
| 18046 ACU | Accutek Pattern 2 Stainless Steel, Anti-Magnetic, Anti-Acid    | **** |
| 18046 USA | Technik Pattern 2<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

### Straight: Broad Tips

Pattern 35A For handling wafers and delicate parts. Length: 4-3/4" 120mm

| Order # | Description   |     |
|---------|---|-----|
| 18201   | Aven Pattern 35A<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |

Pattern 36 Angled broad tip tweezers with large paddle style tips. Wide tips provide firm grip. Length: 4-3/4" 120mm

| Order # | Description  |     |
|---------|--|-----|
| 18202   | Aven Pattern 36<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |


## Tapered: Flat Tips

Pattern 2A Straight flat tips. Provides large flat gripping surface. Length: 4-3/4" 120mm

| Order #   | Description   |      |
|-----------|---|------|
| 18049 ACU | Accutek Pattern 2A<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18049 USA | Technik Pattern 2A<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

\*USA - Ultra Satin Anti-glare Finish

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

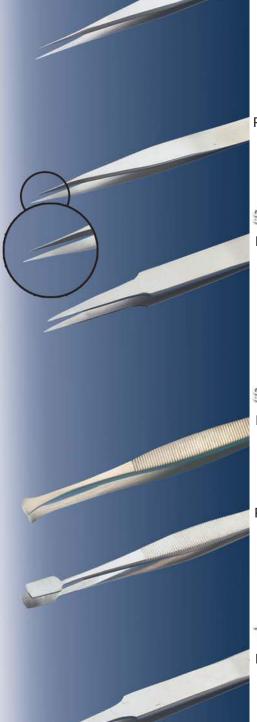





### Tapered: Ultra Fine Tips

Pattern 4 For extra fine work, blades taper sharply from body to very fine long rounded points. Length: 4-1/4" 110mm

| Order #   | Description  |      |
|-----------|--|------|
| 18059 ACU | Accutek Pattern 4 Stainless Steel, Anti-Magnetic, Anti-Acid    | **** |
| 18059 USA | Technik Pattern 4<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |
| 18057     | Aven Pattern 4 Carbon Steel, Nickel/Chrome Plated              | ***  |

Pattern 5 For extra fine work, long blades break sharply from body and taper to super fine points. Length: 4-1/4" 110mm

| Order #   | Description  |      |
|-----------|--|------|
| 18062 ACU | Accutek Pattern 5 Stainless Steel, Anti-Magnetic, Anti-Acid    | **** |
| 18062 USA | Technik Pattern 5<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

### Angled: Fine Tips

Pattern 5A Oblique fine points for greater visibility. Length: 4-1/2" 115mm

| Order #   | Description   |      |
|-----------|---|------|
| 18065 ACU | Accutek Pattern 5A<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18065 USA | Technik Pattern 5A<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

Pattern 6 Same as 3 but shorter. Length: 4-3/4" 120mm

| Order #   | Description  |      |
|-----------|--|------|
| 18069 ACU | Accutek Pattern 6<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18069 USA | Technik Pattern 6<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |
| 18067     | Aven Pattern 6 Carbon Steel, Nickel/Chrome Plated              | ***  |

## Angled: Ultra Fine Tips

Pattern 3CB Same as 3C except tips are bent. Length: 4-1/4" 110mm

| Order #   | Description Accutek Pattern 3CB           | **** |
|-----------|---|------|
| 18078 ACU | Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

Pattern 65A Long fine curved tips. Length: 5-1/2" 140mm

| Order #   | Description  |      |
|-----------|--|------|
| 18076 ACU | Accutek Pattern 65A<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |



Pattern 5B Super micro, high precision bent tips provide maximum visibility. Length: 4-1/4" 110mm

| Order #   | Description   |     |
|-----------|---|-----|
| 18066 ACU | Accutek Pattern 5B<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |
| 18066 USA | Technik Pattern 5B<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |

Pattern 66 Long double bent tips. Length: 5-1/2" 140mm

| Order #   | Description Accutek Pattern 66            | **** |
|-----------|---|------|
| 18077 ACU | Stainless Steel, Anti-Magnetic, Anti-Acid |      |

### Curved: Fine Tips

Pattern 7 For assembly work, hand can rest on bench, curved super fine points. Length: 4-1/2" 115mm

| Order #   | Description  |      |
|-----------|--|------|
| 18072 ACU | Accutek Pattern 7 Stainless Steel, Anti-Magnetic, Anti-Acid    | **** |
| 18072 USA | Technik Pattern 7<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |
| 18070     | Aven Pattern 7 Carbon Steel, Nickel/Chrome Plated              | ***  |

Pattern 7B Curved precision point tweezers. Similar to 7 but tips are serrated. Length: 4-1/2" 115mm

| 18074 USA | Technik Pattern 7B<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |
|-----------|---|-----|
| Order #   | Description   |     |

## Curved: Flat Tips

Pattern 2AB Curved round tip tweezers. Handles delicate or small parts. Tip angle facilitates wafer tray loading. Length: 4-3/4" 120mm

| 18050 USA | Technik Pattern 2AB<br>Stainless Steel, Anti-Magnetic, Anti-Acid | *** |
|-----------|--|-----|
| Order #   | Description  |     |

### Cutting Tweezers

Pattern 15AGW & 15AP For cutting hairsprings and electronic component wires. Blades induction hardened to C58 (C Scale). 15AP same as 15A with parallel cut. Length: 4-1/2" 115mm

| Order #   | Description  |      |
|-----------|--|------|
| 18114 ACU | Accutek Pattern 15AGW Carbon Steel, Nickel/Chrome Plated   | ***  |
| 18115 ACU | Accutek Pattern 15AP<br>Carbon Steel, Nickel/Chrome Plated | **** |

\*USA - Ultra Satin Anti-glare Finish

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com



### Comfort Grip Tweezers

Aven comfort grip tweezers are designed to provide you the ultimate in comfort and control, to help you increase productivity and combat fatigue. The foam grips are ESD Safe and the tweezers feature high precision points for exact control. Tweezers are manufactured from Anti-Magnetic, Anti-Acid Stainless Steel.



Pattern OO-SA Flat edges, heavy duty strong blades, tapering to regular strong points. Length: 4-3/4"

| 18032-ER | Aven Pattern OO-SA |
|----------|--------------------|
| Order #  | Description        |



Pattern 2A-SA Straight, flat tips. Provides large flat gripping surface. Length: 4-3/4"

| 18049-ER | Aven Pattern 2A-SA |  |
|----------|--------------------|--|
| Order #  | Description        |  |



Pattern 3C-SA Very Sharp, ultra fine tips. Length: 4-1/4"

| 18056-ER | Aven Pattern 3C-SA |  |
|----------|--------------------|--|
| Order #  | Description        |  |



Pattern 5-SA For extra fine work, blades taper sharply from the body to super fine points. Length: 4-1/2"

| 18062-ER | Aven Pattern 5-SA |   |  |
|----------|-------------------|---|--|
| Order #  | Description       | · |  |



Pattern 7-SA Curved, super fine tips. Length: 4-1/2"

| 18072-ER | Aven Pattern 7-SA |  |
|----------|-------------------|--|
| Order #  | Description       |  |

76

Precision
Tools

### Titanium Tweezers

These titanium tweezers have been found to be excellent for use in the silicon chip industry because titanium tweezers do not shed particles like the stainless steel tweezers. Anytime an abrasive substance is handled and microscopic particles are a detriment, it may be best to choose titanium. Since titanium is non-magnetic, these tweezers are extremely useful when handling magnetic materials or when working in a magnetic field. Titanium is a light weight, high strength material.

#### Features:

- · Lightweight ( high strength to weight ratio )
- Zero Magnetic Retaintivity
- Temperature Resistant to 800° F
- Chemical and Corrosion Resistant
- Non Solder Adhesive
- Bio compatible (maintain cell integrity, no inflammatory response)
- Typical application: handling of sensitive components in cleaning/chemical processes at high temperatures, histology, biology, forensics, electron microscopy etc.




78



## **Precision Tweezers**

### E-Z Pik Twaazars

E-Z Pik tweezers features a highly durable special coating for high visibility and easy identification. Helps operators quickly identify the tweezers they need for their particular operation and engineers can easily specify tweezers to be used for a particular process by identifying the color only rather than type and style of tweezers. E-Z Pik tweezers will help improve productivity and process control. Available in six popular styles: AA (Yellow); OO (Red): #2A (Black); #3c (Light Blue); #5 (Green); #7 (Orange). Tweezers are manufactured from Anti-Acid, Anti-Magnetic Stainless Steel.

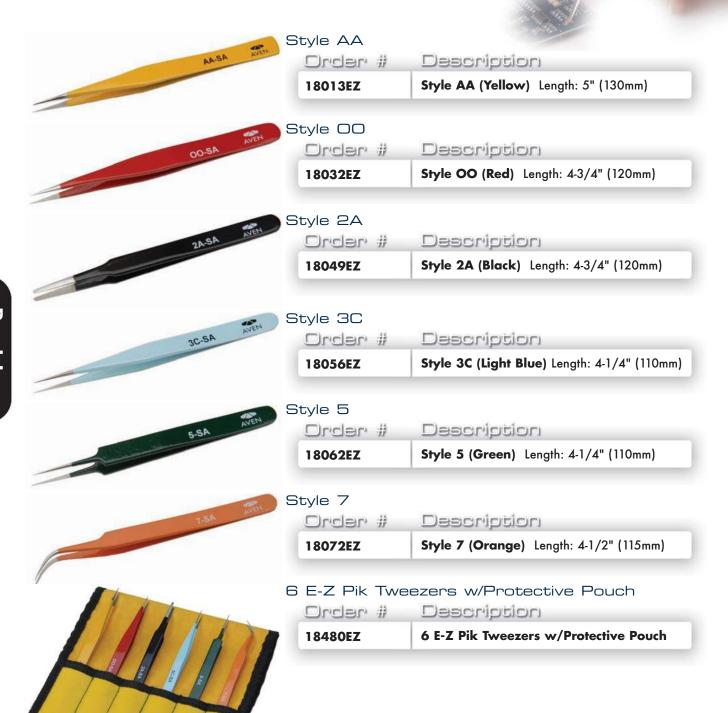

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

## **Carbofib Tweezers**

Anti-Magnetic, Anti-Acid Stainless Steel Grips, with "Carbofib Tips." Fully ESD Safe (10<sup>2</sup> ohm) but at the same time, soft and non scratching. These conductive synthetic fiber tips are ideally suited to handle delicate and fragile components when extreme care and ESD safety are an absolute necessity. Every tweezers is manually finished and tested for maximum precision. Chemical resistant and heat resistant upto 256°C.





## Ceramic Tweezers

Zirconica Ceramic Tweezers meet the requirements for a high grade tweezer for use in:

Clean rooms

Analytical Chemistry

- Chemical Laboratories Semiconductor manufacturing
- Bio Technology
- Circuit Board, Disk Drive and Magnetic Head Manufacturing

#### Features:

- Extremely smooth surface and very low coefficient of friction.
- Low thermal conductivity and high thermal shock resistance.
- Excellent electric loss at very high frequency range (VHF, UHF, and SHF).
- Will not cause electromagnetic induction or eddy current loss in high frequency.
- 100% non magnetic, non rusting and non static.

- Highly resistant to all strong acids except hydrofluoric.
- Free from all metallic contamination.
- Solder will not adhere to surface.
- Six times harder than stainless steel.
- Two times harder than carbon steel.
- Will hold tip geometry better than metal.
- Can be subject to microwaves for sterilization.
- Thermal insulators well suited for soldering.
- Resistant to 1500°C

### AVEN Full Caramic Tweezers

For working with acids (except HF). For SMD solder pot, high temperature exposure. Clean room approved. Can be sterilized, solder repellent.

| Order #  | Description  |
|--|--|
| 18801  | Aven Full Ceramic Tweezers Straight 1mm serrated tips Length: 5"/130mm     |
| 18802 Aven Full Ceramic Tweezers Straight 1mm smooth tips Length: 5"/130mm |  |
| 18803  | Aven Full Ceramic Tweezers Straight very fine smooth tips Length: 5"/130mm |
| 18804  | Aven Full Ceramic Tweezers Curved shape, fine tips Length: 5"/130mm        |

### Accu-Tek Caramic Tweezers

Lightweight, Zirconia replaceable ceramic tips attached to aluminum body. \*Replacement tips available.

| Order # | Description  |
|---------|--|
| 18810   | Accu-Tek Pattern 71 Flat fine tips<br>Length: 5-1/4" Tip Length: 1-1/4"  |
| 18811   | Accu-Tek Pattern 72 Fine tips<br>Length: 5-1/4" Tip Length: 1-1/4"       |
| 18812   | Accu-Tek Pattern 73 Extra fine tips<br>Length: 5-1/4" Tip Length: 1-1/4" |
| 18813   | Accu-Tek Pattern 74 Fine broad tips<br>Length: 5-3/8" Tip Length: 1-5/8" |

#### AVEN Ceramic Tweezers w/EDS Safe Plastic Body

Lightweight and economical ceramic tipped tweezer. Length: 4-3/4: Fine Points

|   | Order # | Description                           |
|---|---------|---------------------------------------|
| ı | 18820   | Aven EDS Safe Ceramic Tipped Tweezers |



## **Plastic Tweezers**

#### Features & Specifications:

- Tips do not spread under pressure
- No contamination
- Static Dissipative (106 109 OHM/SQ)
- Overall length 4-1/2" 115mm
- Non magnetic

#### Recommended Uses:

Ideal for handling semi-conductors, silicone chips and delicate wafers. Static dissipative tweezers are ideal for use with sensitive components where ESD damage is a concern.


### Aven Plastic Tweezers

| Aven 2A   | Straight, flat, rounded | d tips                     |
|-----------|-------------------------|----------------------------|
|           | Order #                 | Description                |
|           | 18511                   | Aven 2A Type: P2A          |
| Pattern 2 | PAB Curved, round       | led tips                   |
|           | Order #                 | Description                |
|           | 18514                   | Aven 2AB Type: P2AB        |
| Pattern 3 | 3⊂ Very fine, straigh   | nt tips                    |
|           | Order #                 | Description                |
|           | 1851 <i>7</i>           | Aven 3C Type: P3C          |
| Pattern 6 | BA Very fine, angulo    | ated tips                  |
|           | Order #                 | Description                |
|           | 18520                   | Aven 6A Type: P6A          |
| Pattern   | 7 Very fine, curved ti  | ps                         |
|           | Order #                 | Description                |
|           | 18523                   | <b>Aven 7</b> Type: P7     |
| Pattern 3 | 35 Straight, flat tips  |                            |
|           | Order #                 | Description                |
|           | 18526                   | <b>Aven 35</b> Type: P35   |
| Pattern 3 | 35A Straight, broad     | d, flat tips               |
|           | Order #                 | Description                |
|           | 18529                   | <b>Aven 35A</b> Type: P35A |



## **General Purpose Tweezers**

Recommended Uses: For bending, separating and removing small items.

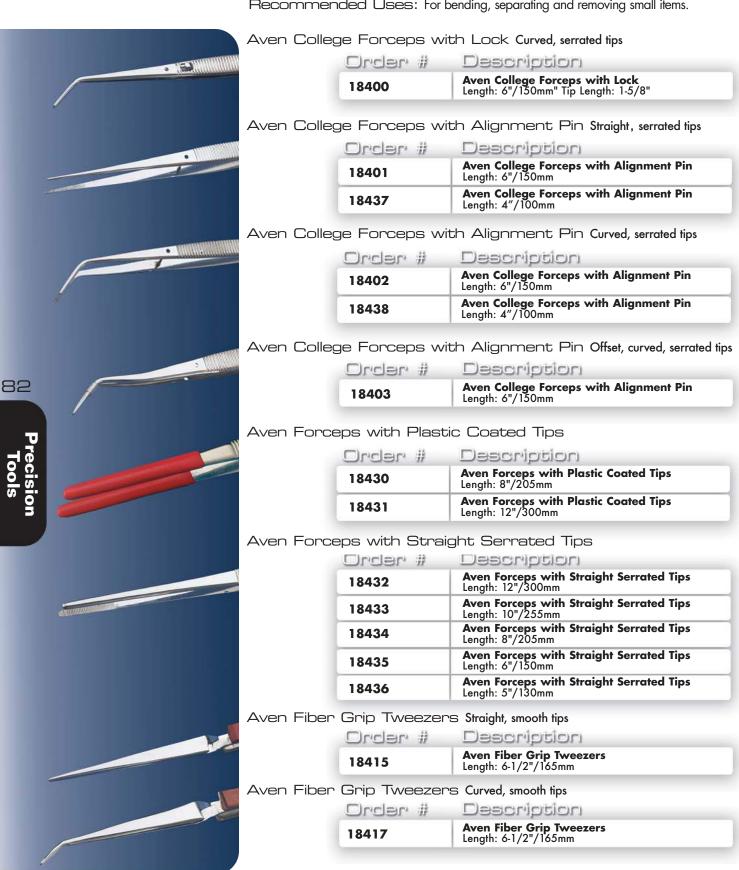

## **General Purpose Tweezers**

Aven Self Locking Tweezers Straight, narrow tips

| Order # | Description  |  |
|---------|--|--|
| 18419   | Aven Self Locking Tweezers<br>Length: 6-1/2"/165mm |  |
| 18423   | Aven Self Locking Tweezers<br>Length: 4-1/2"/115mm |  |

Aven Self Locking Tweezens Straight, serrated wide tips

| 18421 | Aven Self Locking Tweezers<br>Length: 6-1/2"/165mm |
|-------|--|
| 10721 | Length: 6-1/2"/165mm                               |

Aven Utility Tweezers Curved tips and finger serrations

| 18425   | Aven Utility Tweezers<br>Length: 7"/180mm |  |
|---------|---|--|
| Order # | Description                               |  |

Aven Utility Tweezens Straight, serrated tips, and finger serrations

| Order # | Description                           |
|---------|---------------------------------------|
| 18426   | Aven UtilityTweezers Length: 7"/180mm |

Aven Stand Up Cross Locking Tweezers Known as Paper Forceps in the dental trade. Also useful for soldering and holding small parts.

| Order # | Aven Stand Up Cross Locking Tweezers                     |
|---------|--|
| 18428   | Aven Stand Up Cross Locking Tweezers<br>Length: 6"/150mm |

Aven General Purpose Tweezers Curved, serrated tips

| Order # | Description  |
|---------|--|
| 18481   | Aven General Purpose Tweezers Length: 4-1/2"/110mm |

Aven General Purpose Tweezers Tapered, serrated tips

| Order # | Description  |
|---------|--|
| 18482   | Aven General Purpose Tweezers Length: 4-1/4"/110mm |

Aven General Purpose Tweezers Medium sharp tweezers, serrated tips

| Order # | Description                                      |
|---------|--|
| 18483   | Aven General Purpose Tweezers<br>Length: 3"/80mm |



## General Purpose Tweezers

Aven General Purpose Tweezers Slant end Order # Description **Aven General Purpose Tweezers** Length: 3-1/2"/90mm 18484 Aven General Purpose Tweezers Square end, smooth tips Order # Description Aven General Purpose Tweezers Length: 3-1/2" 90mm 18485 Aven General Purpose Tweezers Blunt, smooth tips Order # Description **Aven General Purpose Tweezers** 18486 Length: 3"/80mm Aven General Purpose Tweezers Spade tips, smooth Order # Description **Aven General Purpose Tweezers** 18487 Length: 4-1/2"/110mm Aven General Purpose Tweezers Offset spade tips, smooth Order # Description Aven General Purpose Tweezers Length: 4-1/8"/108mm 84 18488 Aven General Purpose Tweezers Square end, smooth tips Order # Description **Aven General Purpose Tweezers** 18489 Length: 4-1/8"/108mm Aven General Purpose Tweezers Blunt, serrated tips Order # Description Aven General Purpose Tweezers Length: 5-11/16"/145mm 18490 Aven General Purpose Tweezers Offset blunt, serrated tips Order # Description Aven General Purpose Tweezers Length: 4-1/2"/115mm 18491 Aven General Purpose Tweezers Bent, blunt serrated tips Order # Description **Aven General Purpose Tweezers** 18492 Length: 10" 255mm Aven Toothed Tissue Forceps Order # Description **Aven General Purpose Tweezers** 18494 Length: 5-1/2"/140mm

## **Tweezer Sets**

## 5-Piece Precision Tweezers Set



Supplied in an elegant padded wooden case. Contains the most popular tweezers: OO-SA, OOD-SA, 3C-SA, 5-SA and 7-SA  $\,$ 

| Order #   | Description  |      |
|-----------|--|------|
| 18476 ACU | Accutek<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18476 USA | Technik<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

### 6-Piece Precision Tweezers Set



6 of our most popular tweezers supplied in a plastic pouch. Contains AA-SA, OO-SA, OOD-SA, 3C-SA, 5-SA and 7-SA

| Order #   | Description  |      |
|-----------|--|------|
| 18475 ACU | Accutek<br>Stainless Steel, Anti-Magnetic, Anti-Acid | **** |
| 18475 USA | Technik<br>Stainless Steel, Anti-Magnetic, Anti-Acid | ***  |

### 5-Piece Carbofib Tweezers Set



Five of our most popular carbofib tweezers in an elegant padded wooden case. Contains: 2-CF,OO-CF, 2A-CF, 3C-CF and 5CF

| 18478   | ESD-Safe Tweezers Set |  |
|---------|-----------------------|--|
| Order # | Description           |  |



### Aven 6-Pc. Tweezers Set

Contains one each of the following in a plastic pouch: 7" Curved Solder Utility Tweezers, 6" Blunt Tip Tweezers Serrated Points, 4-1/2" Solder Utility Tweezers Sharp Points, 7" Wide Point Tweezers with Lock, 7" Wide Point Cross Locking Tweezers, 7" Solder Utility Tweezers Straight

| Order # | Description             |
|---------|-------------------------|
| 18472   | Aven 6-Pc. Tweezers Set |

### Aven 5-Pc. Tweezers Set

Contains one each of the following in a plastic pouch:4-1/4" Curved Tweezers Serrated Tips, 4-1/4" Spade Tip Tweezers Smooth, 4-1/4" Wide Point Tweezers Serrated Tips, 4-1/4" Indented Shank Tweezers Smooth Tips, 4-1/2" Solder Utility Tweezers Sharp Points

| Order # | Description             |  |
|---------|-------------------------|--|
| 18473   | Aven 5-Pc. Tweezers Set |  |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

## Screwdrivers

#### Features:

- Ergonomically designed handle made from a molded thermoplastic rubber which prevents hands from slipping and allows for maximum torque application.
- Chrome-Vanadium steel blade with tip hardened to 56-60 HRC.

### Slotted Screwdrivers



| Slotted<br>Order # | Blade Length | Tip Size    |
|--------------------|--------------|-------------|
| 13801              | 3" / 75mm    | 1/8" / 3mm  |
| 13802              | 6" / 150mm   | 1/8" / 3mm  |
| 13803              | 3" / 75mm    | 3/16" / 5mm |
| 13804              | 6" / 150mm   | 3/16" / 5mm |
| 13805              | 8" / 200mm   | 3/16" / 5mm |
| 13806              | 4" / 100mm   | 1/4" / 6mm  |
| 13807              | 6" / 150mm   | 1/4" / 6mm  |
| 13808              | 6" / 150mm   | 5/16" / 8mm |

### Phillips Screwdrivers





| Phillips<br>Order # | Blade Length | Tip Size |
|---------------------|--------------|----------|
| 13811               | 3"/ 75mm     | #0       |
| 13812               | 6" / 150mm   | #0       |
| 13813               | 3" / 75mm    | #1       |
| 13814               | 6" / 150mm   | #1       |
| 13815               | 6" / 150mm   | #2       |
| 13816               | 10"/250mm    | #2       |

## Stubby Style Screwdrivers



| Stubby Sty       | /le          |          |
|------------------|--------------|----------|
| Order #          | Blade Length | Tip Size |
| 13809 (Slotted)  | 1-1/4"/31mm  | 1/4"/6mm |
| 13817 (Phillips) | 1-1/4"/31mm  | #2       |

## Torx-Tip Screwdrivers



| Tamper-Proof Torx |                     |          |  |  |
|-------------------|---------------------|----------|--|--|
| Order #           | <b>Blade Length</b> | Tip Size |  |  |
| 13821             | 2"/50mm             | T5       |  |  |
| 13822             | 2"/50mm             | T6       |  |  |
| 13823             | 2"/50mm             | T7       |  |  |
| 13824             | 3-1/4"/80mm         | T8       |  |  |
| 13825             | 3-1/4"/80mm         | T9       |  |  |
| 13826             | 3-1/4"/80mm         | T10      |  |  |
| 13827             | 3-1/4"/80mm         | T15      |  |  |

### Nut Drivers



| Nut Drivers |                     |          |  |  |
|-------------|---------------------|----------|--|--|
| Order #     | <b>Blade Length</b> | Tip Size |  |  |
| 13841       | 4"/100mm            | 3/16"    |  |  |
| 13842       | 4"/100mm            | 7/32"    |  |  |
| 13843       | 4"/100mm            | 1/4"     |  |  |
| 13844       | 4"/100mm            | 9/32"    |  |  |
| 13845       | 4"/100mm            | 5/16"    |  |  |
| 13846       | 4"/100mm            | 11/32"   |  |  |
| 13847       | 4"/100mm            | 7/16"    |  |  |
| 13848       | 4"/100mm            | 1/2"     |  |  |

### Security Screwdrivers





| Securi  | ity  |     |     |     |     |    |     |    |    |
|---------|------|-----|-----|-----|-----|----|-----|----|----|
| Order # | Туре | A   | В   | C   | D   | E  | F   | G  | Н  |
| 13831   | M1.7 | 0.5 | 0.8 | 4   | 2.0 | 10 | Ø10 | 80 | 50 |
| 13832   | M2.0 | 1.0 | 1.0 | 4.5 | 2.0 | 10 | Ø10 | 80 | 50 |
| 13833   | M2.3 | 0.9 | 1.1 | 5   | 2.5 | 10 | Ø10 | 80 | 50 |
| 13834   | M2.6 | 1.2 | 1.2 | 5.5 | 2.8 | 10 | Ø10 | 80 | 50 |

86

**Tools** 

## Screwdrivers

#### Pocket Screwdriver



Pocket Clip Style - Slotted

| Order # | Description  |
|---------|--|
| 13850   | Pocket Screwdriver - Slotted<br>Blade Length: 1/32" x 2" |

### Pocket Screwdriver



Pocket Clip Style - Phillips

| Order # | Description  |
|---------|--|
| 13851   | Pocket Screwdriver - Phillips<br>Blade Length: #0 x 2" |

## **Precision Screwdrivers**

#### Precision Screwdrivers



Specifically designed for electronics.

#### Features:

• Black Tip.

Nylon engineered plastic.
AISI 8660 Chrome-molybdenum vanadium steel with satin finish.
Duplex component handle designed for rapid rotation greater comfort and control.
Fast turning swivel caps.

Imprinted sizes on the handle for easy selection.

| Slotted |                | Unit: m/m      |
|---------|----------------|----------------|
| Order # | Shaft Diameter | Working Length |
| 13900   | 1.0            | 50mm           |
| 13901   | 1.6            | 50mm           |
| 13902   | 2.0            | 50mm           |
| 13903   | 2.4            | 50mm           |
| 13904   | 3.0            | 50mm           |
| 13905   | 2.4            | 75mm           |
| 13906   | 3.0            | 100mm          |
| 13907   | 4.0            | 150mm          |

| Torx and Temper-Proof |                   | t Unit: m/m    |  |
|-----------------------|-------------------|----------------|--|
| Order #               | Tip Size          | Working Length |  |
| 13920                 | T5 (only in star) | 50mm           |  |
| 13921                 | T6 (only in star) | 50mm           |  |
| 13922                 | T7                | 50mm           |  |
| 13923                 | T8                | 50mm           |  |
| 13924                 | T9                | 50mm           |  |
| 13925                 | T10               | 50mm           |  |
| 13926                 | T15               | 50mm           |  |
| 13927                 | T20               | 50mm           |  |

| Phillips |          | Unit: m/m      |
|----------|----------|----------------|
| Order #  | Tip Size | Working Length |
| 13910    | No. 000  | 50mm           |
| 13911    | No. 00   | 50mm           |
| 13912    | No. 0    | 50mm           |
| 13913    | No. 1    | 50mm           |
| 13914    | No. 0    | 75mm           |
| 13915    | No. 1    | 100mm          |
| 13916    | No. 1    | 150mm          |

| Nutdriver |             | Unit: m/m      |  |
|-----------|-------------|----------------|--|
| Order #   | Socket Size | Working Length |  |
| 13930     | M3.0        | 50mm           |  |
| 13931     | M3.5        | 50mm           |  |
| 13932     | M4.0        | 50mm           |  |
| 13933     | M4.5        | 50mm           |  |
| 13934     | M5.0        | 50mm           |  |
| 13935     | M5.5        | 50mm           |  |
| 13936     | M6.0        | 50mm           |  |
|           |             |                |  |



## Precision Screwdriver Sets

#### 7-Piece Precision Screwdriver Set



**Slotted:**  $1.6 \times 50$ mm,  $2.0 \times 50$ mm,  $2.4 \times 50$ mm,  $3.0 \times 50$ mm **Phillips:** No.00 x 50, No.0 x 50, No.1 x 50 Carryina case

> Order # Description

13940 7-pc. Precision Screwdriver Set

### 14 in 1 Reversible Precision Screwdriver Set



Contents:

**Slotted:** 1.5mm, 2.0mm, 3.0mm, 4.0mm **Phillips:** No.0, No.00, No.000, No.1 **Star:** T5, T6, T7, T8, T9, T10 **Handle** 

Order #

Description

13941 14in1 Reversible Precision Screwdriver Set

### 12 in 1 Precision Screwdriver Set



Precision Screwdriver with 6 Reversible Blades

Contents:

Slotted: 1.5mm, 2.0mm, 2.5mm, 3.2mm Phillips: No.000, No.00, No. 0, No.1

Star: T7, T9, T8, T10 Handle

> Description Order #

13710 12 in 1 Precision Screwdriver

## 20 Piece Precision Screwdriver Set



This useful set contains 19 assorted Slotted/Philip/Star/Hex/Ball point/Blades. Special quick release design makes blade changes quick and easy.

Contents:

**Slotted:** 2.0mm, 2.5mm, 3.0mm, 4.0mm Phillips: No.00, No.0 PZ#00 & #0

**Star:** T6, T7, T8, T9, T10 **Nutdriver:** 1.5, 2.0, 2.5 mm **Hex:** 1.5, 2.0, 2.5 mm Handle: 75mm (3")

> Description Order #

13714 20pc. Precision Screwdriver Set

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

88

## Precision Screwdriver Sets

#### 3-Piece Precision Screwdriver Set



Contents:

**Slotted:**  $2.0 \times 75$ mm,  $2.5 \times 75$ mm,  $3.0 \times 75$ mm,  $4.0 \times 75$ mm Phillips: No. 00x75mm, No. 0x75mm, No. 1x75mm, No. 1.5x75mm

> Order # Description

13715 **8-Piece Precision Screwdriver Set** 

### 8-Piece Precision Nut Driver Set



Precision Screwdriver with 6 Reversible Blades

Contents:

**Metric:**  $3.2 \times 75$ ,  $4 \times 75$ /mm,  $5 \times 75$ ,  $5.5 \times 75$ /mm **Inch:** 1.8"  $\times 75$ /mm, 3/16"  $\times 75$ /mm

Order # Description

13716 **6-Piece Precision Nut Driver Set** 

6-Piece Combo Set



Contents:

Slotted: 40mm in sizes 1.8 and 2.5 Phillips: 40mm in sizes No. 00 and No. 0

4" Diagonal Cutter

5" Sharp Pointed Tweezers

Description Order # 13717 **6-Piece Combo Set** 

7-Piece Combo Set



Contents:

**Slotted:** 40mm in sizes 1.8 and 2.5 Phillips: 40mm in sizes 00 and 0

4" Diagonal Cutter 4" Long Nose Pliers

**5" Sharp Pointed Tweezers** 

Order # Description 13718 7-Piece Combo Set

11-Piece Combo Set



Contents:

**Slotted:** 40mm in sizes 1.2, 1.5, 1.8, 2.0, and 2.5

Phillips: 40mm in sizes 000, 00 and 0

4" Diagonal Cutter, 4" Long Nose Pliers, 5" Sharp Pointed Tweezers

Order # Description 13719 11-Piece Combo Set

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com



## recision Screwdrivers

#### 15-Piece Combo Set



Contents:

**Slotted:** 40mm in sizes 1.0, 1.2, 1.5, 2.0 and 2.5

Phillips: 40mm in sizes 000 and 00

Hex: 40mm in sizes 0.9, 1.3 and 1.5 4" Diagonal Cutter, 4" Long Nose Pliers, 5" Sharp Pointed Tweezers,

4-1/2" Scissors, Precision Knife Handle with 6 blades

| 13720   | 15-Piece Combo Set |
|---------|--------------------|
| Order # | Description        |

### 26-Piece Bit and Socket Set



Contents: 19 Bits, 4mm Hex x 28mm **Slotted:** 2.0, 2.5, 3.0, and 4.0 Phillips: 00 and 0 **PZ:** 00 and 0 **Torx:** 6, 7, 8, 9, and 10 **Ball Point:** 1.5, 2.0 and 2.5 **Hex:** 1.5, 2.0 and 2.5

Adapters: 4mm Hex, 1/4" SQ, 25mm

**Sockets:** 1/4" Drive: 3.2, 4.0, 5.0, 5.5 and 7.0

**Neo Microtip Screwdriver Handle** 

Order # Description 13723 26-Piece Bit and Socket Set

## 11-Piece MicroTip Screwdriver Set w/ Interchangeable Blades



Contents:

**Slotted:** 40mm in sizes 0.8, 1.0, 1.2, 1.5, 1.8, 2.0 and 2.5

Phillips: 40mm in sizes 00, 0 and 1

Screwdriver Handle

Order # Description

13721 11-Piece Microtip Screwdriver Set

## 5-Piece Precision Reversible Screwdriver Set



Contents:

**Slotted Reversible:** 120mm in sizes  $0.25 \times 1.5$  and  $0.5 \times 3.0$ ,

 $0.4 \times 2..0$  and  $0.6 \times 3.5$ ,  $0.4 \times 2.5$  and  $0.8 \times 4.0$ 

Phillips Reversible: 120mm in sizes No. 000 and No. 00, No. 0 and No. 1

Neo Microtip Screwdriver Handle, Roll Up Pouch

Order # Description

13722 **6pc. Precision Reversible Screwdriver Set** 

90

Aven Inc. I 4595 Platt Road I Ann Arbor, MI 48108

## **Alignment Tools**

## 25-Piece Master Alignment Tool Kit



This comprehensive selection of the most commonly used alignment tools and adjusters is invaluable to anyone's tool kit. The 25-piece set includes all the trimmer/potentiometer and RF coil adjusting tools available.

| Order # | Description                        |
|---------|------------------------------------|
| 13500   | 25-Piece Master Alignment Tool Kit |

### 9-Piece Anti-Static Alignment Tool Kit



This Pocket Kit contains nine alignment tools constructed from a special nylon type material that cannot retain a static charge. Wide range of tip styles and sizing assures the user will have a tool for adjusting most conventional components.

Pocket Size
 ESD Safe

| 13016   | 9-Piece Anti-Static Alignment Tool Kit |
|---------|--|
| Order # | Description                            |

### Caramic Alignment Scrawdrivers/Adjusters

Special ceramic blades for zero electromagnetic induction. Outlasts metal and plastic tools.



#### Slotted Blade, Ceramic Adjusters

| Order # | Description   |
|---------|---|
| 13224   | Slotted Blade, Ceramic Adjusters Tip Size:0.9mm Blade Length:15mm |
| 13221   | Slotted Blade, Ceramic Adjusters Tip Size:1.3mm Blade Length:15mm |
| 13225   | Slotted Blade, Ceramic Adjusters Tip Size:1.8mm Blade Length:15mm |
| 13222   | Slotted Blade, Ceramic Adjusters Tip Size:2.6mm Blade Length:15mm |

#### Phillips, Ceramic Adjusters

Clades # Description



| 13220    | Phillips, Ceramic Adjusters Tip Size:PH1.7 Blade Length:15mm |
|----------|--|
| 13219    | Phillips, Ceramic Adjusters Tip Size:PHO Blade Length:15mm   |
| 13218    | Phillips, Ceramic Adjusters Tip Size:PHOO Blade Length:15mm  |
| Digai. # | Deach   Dolon  |

#### 4 in 1, Ceramic Adjusters

A handy tool consisting of two double end ceramic bits. **Phillips:** 0 and 1.8mm **Slotted:** 1.7mm and 0.9mm

Supplied with two protective plastic caps.

| 13230   | 4 in 1, Ceramic Adjusters |
|---------|---------------------------|
| Order # | Description               |



A handy set consisting of the most popular ceramic adjusters. Blade length is 15mm and the following sizes are included:

Phillips: PHO and PH1.7 Slotted: 0.9mm, 1.3mm, 1.8, and 2.6mm

| 13231   | 6-pc Ceramic Adjuster Set |
|---------|---------------------------|
| Order # | Description               |





## **Knives & Blades**

#### Technik Knives



#### Technik K-18 Grip-On Non-Roll Soft Handle Knife

5" Comfortable soft grip handle with 4 jaw machined aluminum chuck for secure blade positioning. Includes a super sharp #11 blade, convenient rear blade release and a clear plastic safety cap. Used for cutting or trimming plastic, wood, paper, cloth and film. See page 94 for replacement blades.

| 44011   | K-18 Precision Knife |  |
|---------|----------------------|--|
| Order # | Description          |  |

#### Technik K-40 Pocket-Clip Light Duty Utility Knife

This unique multi-purpose precision knife is outstanding for cutting and trimming of paper, plastic, cloth, film and rubber and includes the following features:

- Unique twist lock pocket-clip safety cap.
- Machined aluminum 4 jaw chuck for tight secure blade housing.
- Comfortable ridged tapered plastic handle.
- Super sharp #11 blade.

See page 94 for replacement blades.

| Order # | Description                     |
|---------|---------------------------------|
| 44018   | K-40 Knife with Pocket Clip Cap |

#### Technik Precision K-1 Light Duty Knife

4-3/4" aluminum handles with 4-slot point chuck for easy blade release. Includes a super sharp #11 blade and a high impact safety cap. Used for precision cutting, forming and stripping of paper, plastic, wood, cloth and film. See page 94 for replacement blades.

| Order # | Description         |  |
|---------|---------------------|--|
| 44012   | K-1 Precision Knife |  |

#### Technik K-2 Medium Duty Knife

4-3/4" aluminum handle with 4-slot point chuck for easy blade release. Includes a super sharp #22 blade and a high impact safety cap. Used for precision cutting, trimming and stripping paper, plastic, wood, cloth and film. See page 94 for replacement blades.

| 44013   | K-2 Medium Duty Knife |  |
|---------|-----------------------|--|
| Ordar # | Description           |  |

#### Technik K-5 Heavy Duty Knife

7/16" aluminum adapter, 4 jaw machined aluminum chuck for secure blade positioning and a snug fitting plastic safety cap. Included is a sharp edge angled blade. Used for precision cutting, trimming, stripping paper, plastic and wood. See page 94 for replacement blades.

| 44014 | K-5 Heavy Duty Knife |
|-------|----------------------|
|-------|----------------------|



92

Precision Tools





## **Knives & Blades**

#### Tachnik Knivas



#### Technik K-8 Flat Handle Light Duty Knife

You can adjust the length of the blade by releasing the nut. Both ends of the blade can be used for cutting boxes, wood, leather and foam.

| Order # | Description                  |
|---------|------------------------------|
| 44015   | K-8 Light Duty Knife         |
| 44257   | K-8 Replacement Blade (5/pk) |



Comes with 13-point blade. For home, office, industrial use cutting paper, plastic, wood and other items.

| Order # | Description                      |
|---------|----------------------------------|
| 44016   | K-10 Heavy Duty Snap Blade Knife |
| 44256   | K-10 Replacement Blade (100/pk)  |



| Order # | Description                      |
|---------|----------------------------------|
| 44017   | K-13 Heavy Duty Snap Blade Knife |
| 44254   | K-13 Replacement Blade (100/pk)  |




#### Technik Scalpel Handles and Blades

These high precision knives are designed for intricate detailed work. Made from non-sterile .015" thick stainless steel, these blades are ideal for precision cutting in micro circuitry, photography, art, etc.

We offer a variety of handles and blades to suit many applications. Blades are made from surgical quality stainless steel and are supplied 2pc per tube.

Use the #30 plastic or #31 stainless steel metal handles for blades #10, 11, 12 and 15, use the #32 plastic handle or the #33 stainless steel metal handle for blade #23.

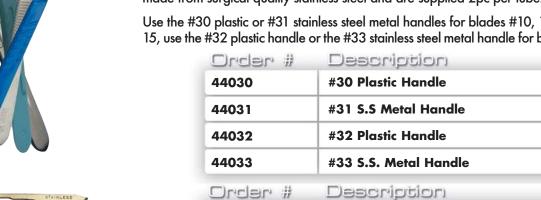



| Order # | Description       |          |
|---------|-------------------|----------|
| 44041   | #10 Scalpel Blade | 2pc/tube |
| 44042   | #11 Scalpel Blade | 2pc/tube |
| 44043   | #12 Scalpel Blade | 2pc/tube |
| 44044   | #15 Scalpel Blade | 2pc/tube |
| 44045   | #23 Scalpel Blade | 2pc/tube |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

### Technik Knife Set



Contains K1, K2, K5 knife handles with 13 assorted blades in a plastic tray that includes a Teflon covered magnetic strip to help in holding the blades securely.

| Order # | Description |  |
|---------|-------------|--|
| 44101   | Knife Set   |  |

### Technik Deluxe Knife Set



Contains the same items as our Knife Set #44101 however, is supplied in a wooden box

| 44102   | Technik Deluxe Knife Set |  |
|---------|--------------------------|--|
| Ordar # | Description              |  |

### Technik Replacement Blades

- Blades precision-crafted of the highest quality carbon and stainless steel with hard, sharp points and honed cutting edges.
  Designed to handle a variety of tasks where accuracy and cutting ease are essential.

|   | Description  | Order #                                   |
|---|--|---|
| 0 | No. 2 Blade Sharp angle for precision cutting of medium to heavyweight materials   | 44201 / 5 Pack Tube<br>44202 / 100 Pack   |
|   | No. 10 Blade For general cutting, light carving and slicing  | 44203 / 5 Pack Tube<br>44204 / 100 Pack   |
| 0 | No. 11 Blade Sharp angle for delicate, precision cutting, trimming and stripping   | 44205 / 5 Pack Tube<br>44206 / 100 Pack   |
|   | No. 11 Stainless Steel Blade<br>Resists corrosion; will not rust   | 44205S / 5 Pack Tube<br>44206S / 100 Pack |
|   | No. 16 Blade For stencilling, etching and scoring; also used on printed circuit boards   | 44211 / 5 Pack Tube<br>44212 / 100 Pack   |
|   | No. 17 Blade For precision wood chiseling with 1/4" cutting surface  | 44213 / 5 Pack Tube<br>44214 / 100 Pack   |
|   | No. 18 Blade For deep cross and smooth chiseling of wood with 1/2" cutting surface   | 44215 / 5 Pack Tube<br>44216 / 100 Pack   |
| 0 | No. 19 Blade For light chiseling, rough shaping, deburring and trimming  | 44217 / 5 Pack Tube<br>44218 / 100 Pack   |
|   | No. 22 Blade For long, heavy pressure cuts and general initial shaping in wood working, whittling, carving, trimming and slicing | 44221 / 5 Pack Tube<br>44222 / 100 Pack   |
|   | No. 23 Blade For corner cuts, stripping and trimming in confined areas   | 44223 / 5 Pack Tube<br>44224 / 100 Pack   |
|   | No. 24 Blade For close corner cuts on templates and mates for deburring, stripping and gasket cutting                            | 44225 / 5 Pack Tube<br>44226 / 100 Pack   |
|   | No. 25 Blade For general purpose heavy-pressure cutting, whittling, carving and trimming   | 44227 / 5 Pack Tube<br>44228 / 100 Pack   |
|   | No. 26 Blade For general purpose whittling and trimming with 2-15/16" cutting edge   | 44229 / 5 Pack Tube                       |
|   | No. 27 Blade For general purpose cutting of lightweight & medium woods; 3" length for deeper cut                                 | 44230 / 5 Pack Tube                       |
| 0 | No. 28 Blade For whittling, leather and linoleum work  | 44231 / 5 Pack Tube                       |

94

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

## Scissors



#### 5" Electrician Scissor

Heavy-duty general-purpose scissor with two notches for 19 AWG and 23 AWG wire. Scraper and file on back edge of blade. Blade Length: 2"

| Order # | Description            |  |
|---------|------------------------|--|
| 11012   | 5" Electrician Scissor |  |

#### 4-1/2" Slim Blade Scissor

Most popular precision scissor for cutting fine wire and for general use. Blade Length: 1-1/4"

| Order # | Description                          |
|---------|--------------------------------------|
| 11014   | 4-1/2" Slim Blade Scissor - Straight |
| 11072   | 4-1/2" Slim Blade Scissor - Curved   |

#### All Purpose Standard Scissor

The most common scissor for a variety of applications. Available in 3 most popular sizes.

| Order # | Description  |  |
|---------|--|--|
| 11022   | <b>7" All Purpose Standard Scissor</b> Blade Length: 3-1/4"    |  |
| 11023   | <b>8" All Purpose Standard Scissor</b><br>Blade Length: 3-3/4" |  |

#### 4-1/2" Precision Scissor

Excellent for routine and specialty applications. Blade Length: 1-3/8"

| 11016   | 4-1/2" Precision Scissor |  |
|---------|--------------------------|--|
| Order # | Description              |  |

#### 5" Ceramic Scissor

The durable zirconia blade insert even works with magnetic materials. Plastic handles are carbon fiber reinforced.

| 11802   | 5" Ceramic Scissor |  |
|---------|--------------------|--|
| Order # | Description        |  |

#### 5-1/2" Ceramic Scissor

Ultra-sharp solid blades never dull. Aluminum die cast handles.

| 11801   | 5-1/2" Ceramic Scissor |  |
|---------|------------------------|--|
| Order # | Description            |  |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com

#### Combination Scissors







96

This scissor has a unique 2 in 1 cutting blade and can trim and cut materials that would not be possible with a normal scissor.

- Easily trim materials such as nylon fiber, cabtire cord, Kevlar etc.
- Gives you a fine flush cut
- Notched blades prevent the material to be trimmed from slipping
- U types notches on the blade allows you to hold items such as copper wire, cabtire or insulated cords etc. firmly in place
- Soft grip for added comfort
- Stainless Steel with blade hardness of HRC 54
- Length 170mm (6-1/2")

## Specifications:


#### **Notched Blade Cutting Capacity:**

Aluminum/Copper sheet: 0.5mm

Plastic plate/PET: 1.0mm

#### **U-type Blade Cutting Capacity**

Copper wire: 1.5mm





| 11080   | 2 IN 1 Combination Scissors |  |
|---------|-----------------------------|--|
| Order # | Description                 |  |

A full line of crimping tools and wire strippers to meet all your data com requirements



### Aven Professional Crimping System



- All Steel Construction.
- Fully Ratcheting Cycle.
- Interchangeable dies constructed from heat treated hardened tool steel for long life.
- Quick Release Safety Latch.
- Sure-Grip Handles.
- More die selections available, contact Aven for details.
- Can provide custom designed die, contact Aven for details.

| Order # | Description |
|---------|-------------|
| 10160   | Frame Only  |

## Dies for Coax Connectors

| Die for Coax<br>Connectors | Description   | Order # |
|----------------------------|---|---------|
|                            | For RG-58, RG-174 and RG-8218 for both 50 and 75-ohm cables. (Hex 0.213, 0.190, 0.178, 0.068, 0.042)          | 10162D  |
|                            | For N-Series and RG-8/11 Connectors (Hex 0.429, 0.100, 0.080)   | 10166D  |
|                            | For Cambridge CP-88, CP-89, BNC/TNC coax connectors with RG-58, RG-59/62 AU cables. (Hex 0.305, 0.068, 0.228) | 10169D  |
|                            | For RG-58, RG-59/62, BNC/TNC Coax connectors (Hex 0.255, 0.213, 0.068)  | 10172D  |
|                            | For Plenum and Teflon cables RG-58 and 59. (Hex 0.213, 0.190, 0.068, 0.042)                                   | 10163D  |
|                            | For RG-59, RG-6, F-Type CATV Connectors (Hex 0.350, 0.320, 0.255)   | 10167D  |
|                            | For RG-174, Mini 59, BNC/TNC Connectors (Hex 0.178, 0.128, 0.068)   | 10170D  |
|                            | For RG-6, RG-174, Belden-Type RG 8281 Cables (Hex 0.324, 0.178, 0.068)  | 10174D  |

98

Precision
Tools

| Die for Modular<br>Connectors            | Description  | Order # |
|--|--|---------|
| O D D D D D D D D D D D D D D D D D D D  | For RJ-11 DEC MMJ six-position modular plugs with an offset release tab  | 10164D  |
|  | For Amp RJ-45 eight-position modular plugs. Primary strain relief crimp bar is located further back on the die/modular plugs | 10168D  |
| ⊕<br>⊕                                   | For RJ-45, eight-position keyed or non-keyed modular plugs (excluding AMP)   | 10171D  |
| BO LINES LINES                           | For RJ-11 two, four and six-position modular plugs   | 10175D  |
|  | For RJ-22 two and four-position handset modular plugs  | 10176D  |
| Die for Barrel Type                      | Connectors   |         |
|  | 22-10 AWG insulated terminals. Color-coded nests   | 10161D  |
|  | For 22-12 AWG non-insulated, open barrel connectors, Commercial type   | 10165D  |
| Die for Wire Ferrul                      | es   |         |
| 23 7 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | For wire ferrules 12-22 AWG (0.5mm sq to 4mm sq)   | 10178D  |
|  | For wire ferrules 6-10 AWG (6mm sq to 16mm sq)   | 10179D  |
| Die for Fiber Optic                      | Connecters   |         |
|  | AMP Optimate Fiber-Optic SMA or SFR type connectors (Round 0.195)  | 10173D  |



## Universal Crimp Tool for Coax Connectors



For crimping RG type connectors. Will crimp the following RG connectors: 55, 58, 59, 5, 6, 21, 141, 142, 143, 210, 212, 222, 223, 303, 304 and 400. Will crimp the following Belden type connectors: 8279, 8281, 9231 and 9141.

| Order # | Description          |  |
|---------|----------------------|--|
| 10184   | Universal Crimp Tool |  |

### All In One Telephone Tool



This versatile tool combines all the necessary tools to cut, strip and crimp modular telephone wires and plugs. Will cut and strip flat line cord cable up to 8 conductors wide. Crimps 8P8C/RJ45, 6P6C/RJ12, 6P2C/RJ11, 6P2C, 4P4C/Handset and 4P2C.

| Order # | Description               |  |
|---------|---------------------------|--|
| 10181   | All In One Telephone Tool |  |

## All In One Telephone Tool







Cuts and strips telephone cable. Features: RJ11, 2, 4 and 6 position and RJ45 8 position, a fully ratcheting cycle and a built in safety release.

| 10183 | Universal Crimp Tool |  |
|-------|----------------------|--|
| 10103 | Oniversal Crimp 1001 |  |

### Modular Crimper



An extremely practical tool that is used for RJ11 and RJ45 applications. Both die are built into the tool. Also has a built in cutter and stripper to make it easier to prepare wire before crimping. Ratcheted Action

| Order # | Description                  |  |
|---------|------------------------------|--|
| 10185   | RJ11/RJ45 Modular Crimp Tool |  |

## 4-Way Indent Crimp Tool



Designed to crimp closed barrel, screw machine pin and socket style contacts. Performs a simultaneous 4 indent crimp for superior contact retention.

| 10186 | 4-Way Indent Crimp Tool               |  |
|-------|---------------------------------------|--|
|       | , , , , , , , , , , , , , , , , , , , |  |

### Wire Stripper



Has adjustable screw stop for different wire sizes, and cushion grips. Cuts and strips both solid and stranded wire, cleanly and neatly. Hardened or ground blades. Strips AWG 30-10 wire.

| Order # | Description   |  |
|---------|---------------|--|
| 10106   | Wire Stripper |  |

#### Cable Cutter



Cuts coaxial cable up to RG-9U, multi-conductor cable up to 0.500" (12.7mm) and solid or stranded wire up to #8 AWG (10mm sq).

| Order # | Description  |  |
|---------|--------------|--|
| 10102   | Cable Cutter |  |

### Cable Cutter-Heavy Duty



- Can cut up to 100 pair group cable.
- Cuts coaxial cable up to RG174/RG9.
- Built-in return springs allow ease of use.
- Custom grips and safety locks.
- Made from stamped hardened carbon steel.

| 10106A | Description Cable Comer Herror Duby |  |
|--------|-------------------------------------|--|
| 10106A | Cable Cutter-Heavy Duty             |  |

### Ratchet Cable Cutter



- Cuts 750MCM (380mm sq) and smaller hard-drawn copper and aluminum cable.
- Specially hardened steel blades for longer life.
- Quick release mechanism simplifies blade back-out.
- Handles lock together for easy storage.

| Order # | Description          |  |
|---------|----------------------|--|
| 10106В  | Ratchet Cable Cutter |  |

### UTP Cable Stripper




A simple tool for UTP cables. Strips in 3 circles to extract the jacket of UTP cables. Can also function as a 110 punch down tool.

| 10110   | UTP Cable Stripper |  |
|---------|--------------------|--|
| Order # | Description        |  |



### Rotary Coaxial Cable Stripper



For RG/58, 59 and 62. Strips without adjustments.

| Order # | Description                                 |  |
|---------|---|--|
| 10111   | Rotary Coaxial Cable Stripper A: 8mm B: 4mm |  |
| 10112   | Rotary Coaxial Cable Stripper A: 6mm B:     |  |
| 10111D  | Replacement Blades<br>for 10.111            |  |
| 10112D  | Replacement Blades<br>for 10.112            |  |

Round Cable Stripper



Slits cable both longitudinally and circumferentially. It can be used on single or multiple conductor cable to 1.75" (44.5mm) 0.D. The blade can be adjusted to jacket thickness up to 0.125" (3.2mm).

| 10113   | Round Cable Stripper |
|---------|----------------------|
| Order # | Description          |

## Multi-Function Wire Stripper

102

- Use on shielded twisted pair and unshielded twisted pair, CATV Cable, CB Antenna, SO, SJ, and SJT and other flexible cables.
- Strips coax and UTP/STP cables.
- Versatile stripper and cutter allows you to carry fewer tools.
- Built-in cutter for clean cuts.
- Built-in wire stripper strips 16 to 26 AWG for added versatility.

10114 Description

Multi-Function Wire Stripper

Stripper/Cutter/Crimper



#### Item #10133

- Strips wire in wire sizes AWG 20 to 10 (0.8 to 2.6mm).
- Cuts soft copper wire.
- Cuts five bolt sizes (M2.6, M3, M3.5, M4 and M5).
- Crimps bare and insulated terminals.
- Crimps coax connectors (6mm).
- Has a serrated jaw and a narrow nose for pulling and looping wire and tightening small nuts.
- Cushioned handles.
- Length 8-1/4".

#### Item #10134, 10134A & 10134B

- Strips wire and 10134 crimps insulated terminals in wire sizes 22-10 & 22-14 AWG
- Cuts soft copper wire.
- Has a serrated jaw for pulling and looping wire and tightening small nuts.
- · Cushioned handles with springs for easy repetitive wire stripping.
- Length 6-1/2".

| Order # Description |                                       |
|---------------------|---------------------------------------|
| 10133               | Stripper/Cutter/Crimper               |
| 10134               | Stripper/Cutter AWG 26–16 (0.4–1.3mm) |
| 10134A              | Stripper/Cutter AWG 30–20 (0.2–.08mm) |
| 10134В              | Stripper/Cutter AWG 20-10 (0.8-2.6mm) |



Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

Crimping Tool for Micro Connectors



- Capable of crimping 1.25 to 2.5mm (AWG 32-20) pitch connector pins.
- D-Sub connector contact can be also crimped.
- Original Set-pin prevents the joint from being loose and offers you easy maintenance.
- With locking latch and coiled spring.
- Pliers made of S55C with Teflon coating.
- 135g compact body for fatigue-free work.
- Length 6.8"

|       | Die Width | Die Height Wire Size Ra |               | ıge       |  |
|-------|-----------|-------------------------|---------------|-----------|--|
| Die 1 | 1.0mm     | 0.50mm                  | Ø 0.20-0.32mm | AWG 32-28 |  |
| Die 2 | 1.4mm     | 0.55mm                  | Ø0.32-0.51 mm | AWG 28-24 |  |
| Die 3 | 1.6mm     | 0.8mm                   | Ø 0.51-0.64mm | AWG 24-22 |  |
| Die 4 | 1.9mm     | 0.9mm                   | Ø 0.51-0.81mm | AWG 24-20 |  |

| Order # | Description  |
|---------|--|
| 10140   | Crimping Tool for Micro Connectors                                 |
| 10141   | Crimping Tool for Large Connectors Sizes: 1.6, 1.9, 2.0 and 2.3 mm |



### Wire Stripper



One light squeeze strips wire clean up to a full 7/8". Automatic feature holds jaws open to remove wire without crushing ends. Practically eliminates all nicking, cutting or fraying. Strips Teflon, Silicone and PVC wire. Made of aluminum with plastic molded handles. Will strip 22, 16, 14, 12, 10 and 8 AWG sizes.

| Order # | Description   |
|---------|---------------|
| 10105   | Wire Stripper |

#### BNC/INC Connector Removal Tool



For easy access to high-density locations of connectors. Available in two popular lengths.

| Order # | Description              |  |
|---------|--------------------------|--|
| 10136A  | 12" BNC/TNC Removal Tool |  |
| 10136В  | 8" BNC/TNC Removal Tool  |  |

### Punch Down Tool with 110/66 Blades

Precision Tools



Insert and cut cable terminations effortlessly with this punch down tool. Impact absorbing, cushioned grip reduces operator stress for high volume installers. Adjustable high/low actuation setting accommodates termination requirements or operator preference. Storage compartment with unique locking device provides convenient storage for spare blades and helps prevent blade loss.

| Order # | Description                        |
|---------|------------------------------------|
| 10135   | Punch Down Tool with 110/66 Blades |
| 10135A  | Spare Blade 110                    |
| 10135B  | Spare Blade 66                     |

### Connector-Crimping Pliers



Designed to seat UG, UR and UY connectors. A special stop behind cutout prevents damage to connectors.

| 10137   | Connector-Crimping Pliers |  |
|---------|---------------------------|--|
| Order # | Description               |  |

### Double Socket Can Wrench



Use to place fuses in cable terminals and connect wires to fuses and binding posts. 3/8" and 7/16" hex double end. Plastic handle.

| Order # | Description              |  |
|---------|--------------------------|--|
| 10138   | Double Socket Can Wrench |  |

Desoldering Iron



Combines the ease and portability of a hand-held, manual desolder pump, with the performance of an electric desolder station. Vacuum chamber is easily removed for cleaning.

| Order #   | Description           |  |
|-----------|-----------------------|--|
| 17522     | Desoldering Iron      |  |
| 17522-220 | Desoldering Iron 220V |  |

6-Piece Solder Aid Kit



5-Piece Solder Aid Kit



Six of the most popular soldering aids. Use the hook to remove components, the reamer to clean holes choked with solder, the knife for cutting away unnecessary circuits on PCB's, the scraper to remove the shielding from wires, rust and contamination to improve adhesion of solder, the brush to clean and the fork to bend and hold leads.

| 17524   | 6-Piece Solder Aid Kit |  |
|---------|------------------------|--|
| Order # | Description            |  |

This kit consists of a tweezer, a heat sink and 3 popular solder aids.

| Order # | Description            |  |
|---------|------------------------|--|
| 17523   | 5-Piece Solder Aid Kit |  |

Soldering Stands



- Holds up to 1-1/8" diameter iron.
- Heavy duty metal base.
- Built in sponge tray.

- Sponge receptacle.
- 2 position iron holder stand.
- Two per pack.

| Order #        | Description                    |  |
|----------------|--------------------------------|--|
| 1 <i>7</i> 531 | Soldering Iron Stand           |  |
| 17533          | Soldering Stands-Two per pack. |  |

Desoldering Pumps



Rugged, manual loading tool for volume desoldering. High vacuum heavy-duty plastic, fully enclosed shaft for safety. Plunger locks for compact storage.

Order # Description 17535 **Desoldering Pump**-13" High Impact Plastic

Sturdy tool for routine desoldering. Slim profile with a smooth action.

Order # Description 17536 Desoldering Pump-8.5" EDS Safe Plastic

Rugged, metal construction with an anti-static tip.

Order # Description **Desoldering Pump-8.5"** Metal Body 17537

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108



#### No Clean Microwick



#### Desoldering Wick



## 106 Solder Reel Stand





Solder



Third Hand With Tweezers



- No Contamination.
- No Burns.
- Handy dispenser allows precision positioning of the wick.
- Eliminates contamination and burns.
- Pure copper braid (3/32" wide) coated with a "no clean", non-corrosive, halide-free rosin based flux. Length 8".
- Cleaning not needed, leaves no visible residue.

| 17549   | No Clean Microwick |  |
|---------|--------------------|--|
| Order # | Description        |  |

- High quality desoldering braid with unique no clean flux.
- Pure oxygen free copper wire.

| Order # | Description   |                   |
|---------|---|-------------------|
| 17540   | Desoldering Wick<br>Width: .06"/1.5mm Length:5"/1.5mm | Weight: 0.4oz/11g |
| 17541   | Desoldering Wick<br>Width: .08"/2mm Length:5"/1.5mm   | Weight: 0.5oz/13g |
| 17542   | Desoldering Wick<br>Width: .10"/2.5mm Length:5"/1.5mm | Weight: 0.6oz/16g |

#### Features:

- Keep benches neat and draw out solder wire smoothly.
- Holds up to 1kg (approximately 2lbs.)roll of solder wire.
- Dimensions: 86mm (W) x 14mm (H) x 78mm (D) (3.4"x0.55"x3.1")
- Shaft diameter: 1.5mm (0.6")


| 17560   | Solder Reel Stand | 1 |
|---------|-------------------|---|
| Order : | Description       |   |

Formulated for high quality hand soldering of circuit boards and electronic assemblies.

| Order #        | Description   |
|----------------|---|
| 1 <i>7</i> 551 | Solder Tin-Lead Alloy: 60 - 40<br>Diameter: 0.03"/0.8mm Weight: 1lb/500g    |
| 17552          | Solder Tin-Lead Alloy: 60 - 40<br>Diameter: 0.04"/1mm Weight: 1lb/500g      |
| 17553          | Solder Tin-Lead Alloy: 60 - 40<br>Diameter: 0.05"/1.2mm Weight: 1lb/500g    |
| 17554          | Solder Tin-Lead Alloy: 60 - 40<br>Diameter: 0.03"/0.8mm Weight: 0.55lb/250g |
| 1 <i>7</i> 555 | Solder Tin-Lead Alloy: 60 - 40<br>Diameter: 0.04"/1mm Weight: 0.55lb/250g   |

Allows both hands free for soldering. Heavy base prevents movement and multi position swivel clamps permit holding of piece at any angle.

| 17012 Third Hand With Tweezers |
|--------------------------------|
|--------------------------------|

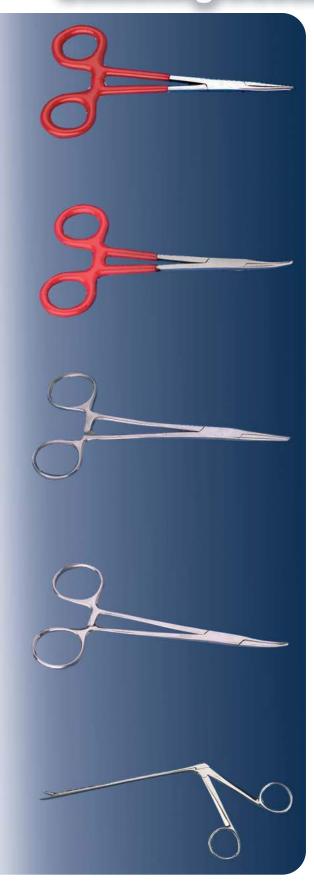

## Hemostats Straight with Plastic Coated Handles

The most versatile tool, can be used as clamps, heat sinks, third hands, etc., while soldering. Has a three position locking device. Serrated jaws. Stainless steel construction.

| Order # | Description   |
|---------|---|
| 12011   | Hemostat Straight with Plastic Coated Handles Length: 5"    |
| 12013   | Hemostat Straight with Plastic Coated Handles<br>Length: 6" |

## Hemostats Curved with Plastic Coated Handles

| Order # | Description   |
|---------|---|
| 12012   | Hemostat Curved with Plastic Coated Handles<br>Length: 5" |
| 12014   | Hemostat Curved with Plastic Coated Handles<br>Length: 6" |

#### Hemostats Straight

| Order # | Description                         |  |
|---------|-------------------------------------|--|
| 12001   | Hemostat Straight<br>Length: 3-1/2" |  |
| 12015   | Hemostat Straight Length: 5"        |  |
| 12017   | Hemostat Straight<br>Length: 6"     |  |
| 12019   | Hemostat Straight<br>Length: 8"     |  |

#### Hemostats Curved

| Order # | Description                       |
|---------|-----------------------------------|
| 12002   | Hemostat Curved<br>Length: 3-1/2" |
| 12016   | Hemostat Curved Length: 5"        |
| 12018   | Hemostat Curved Length: 6"        |
| 12020   | Hemostat Curved<br>Length: 8"     |

#### Alligator Clamps


A unique tool for retrieving and holding small parts. Allows you to reach into long narrow spaces. Stainless steel.

| Order # | Description                       |  |
|---------|-----------------------------------|--|
| 12201   | Alligator Clamp<br>Length: 3-1/2" |  |
| 12202   | Alligator Clamp<br>Length: 5-1/2" |  |

Aven Inc. | 4595 Platt Road | Ann Arbor, MI 48108

Tel: 734-973-0099 | Fax: 734-973-0097 | www.aveninc.com



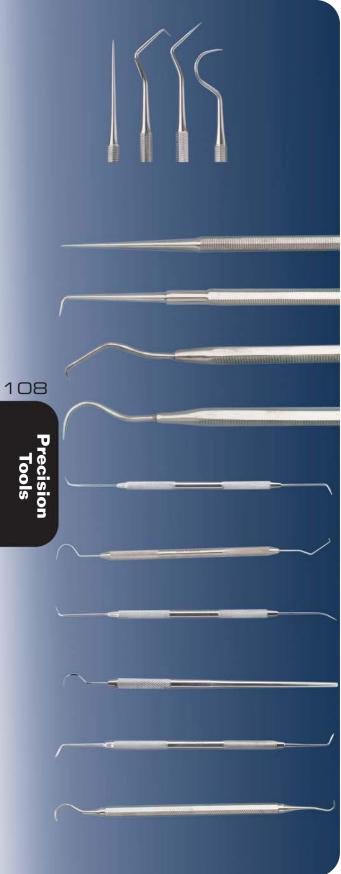

## 4-Pc. Single Probe Set

These probes are made from stainless steel. They are scalpel-shaped for fine probing. Useful for cold solder probing, hand inspection, micro positioning lead adjusting, etc.

| Order # | Description            |  |
|---------|------------------------|--|
| 20210   | 4-Pc. Single Probe Set |  |

#### Stainless Steel Probes

Useful for cold solder probing, hand inspection, micro positioning and lead adjusting.

| Order #       | Description                       |
|---------------|-----------------------------------|
| 20031         | Stainless Steel Probe             |
| Order #       | Description                       |
| 20032         | Stainless Steel Probe             |
| Order #       | Description                       |
| 20033         | Stainless Steel Probe             |
| Order #       | Description                       |
| 20034         | Stainless Steel Probe             |
| Order #       | Description                       |
| 20040         | Stainless Steel Probe             |
|               |                                   |
| Order #       | Description                       |
| 20036         | Stainless Steel Probe             |
| Ordar #       | Description                       |
| 20039         | Stainless Steel Probe             |
| Order #       | Description                       |
| 20038         | Stainless Steel Probe             |
| C)eselese #   | Description                       |
| Order # 20035 | Description Stainless Steel Probe |
| -11111        |                                   |
| Order #       | Description                       |
| 20037         | Stainless Steel Probe             |

# **Product Index**

| Articulating Arms                 | 91                          | LCD Monitors                 | Page<br>27         |
|-----------------------------------|-----------------------------|------------------------------|--------------------|
| Alignment Tools Articulating Arms | 91                          |                              |                    |
| Articulating Arms                 |                             | LED Ring Lights              | 23                 |
|                                   | 31                          | Lift Articulating Boom Stand | 31                 |
| Auxilary Lenses                   | 22                          | Loupes                       | 33,34              |
| В                                 |                             | M                            | ,                  |
| Backlight                         | 24                          | Magnfiers                    | 33-35              |
| Blades                            | 93-94                       | Magnifying Lamps             | 37-40              |
| Boom Stands                       | 29-30                       | Microscope Accessories       | 21,22              |
| G C                               | 27.00                       | Microscope Stands            | 30-31              |
| Cable Cutters                     | 101                         | Microscopes                  | 14-20              |
| Cable Strippers                   | 101,102                     | MiniVue                      | 25                 |
| Camera Adapter                    | 22                          | Monitors                     | 27                 |
| Cameras                           | 25-27                       | O                            | 27                 |
| Can Wrench                        | 104                         | Optivisior                   | 35                 |
| Carbofib Tweezers                 | 79                          | P                            | 33                 |
| CCD Cameras                       | 26                          | Parallel Action Pliers       | 40                 |
|                                   | 95                          | Plastic Tweezers             | 68<br>81           |
| Ceramic Scissors                  |                             |                              |                    |
| Ceramic Screwdrivers              | 91                          | Pliers                       | 56,61,62,63,68,104 |
| Ceramic Tweezers                  | 80                          | Pocket Microscopes           | 32,33              |
| Comfort Grip Tweezers             | 76                          | Portable Microscope          | 4,5                |
| Compund Action Cutter             | 68                          | Precision Screwdrivers       | 87-90              |
| Connector Removal Tool            | 104                         | Precision Tweezers           | 71-75, 76, 77,78   |
| Crimping Pliers                   | 104                         | Probes                       | 108                |
| Crimping Tools                    | 98, 100,103, 104            | Punch Down Tool              | 104                |
| Cutters                           | 53-55,59,63,64,66,67,68,101 | R                            |                    |
| Cutting Tweezers                  | 75                          | Ring Lights                  | 23,24              |
| D                                 |                             | S                            |                    |
| Desoldering Iron                  | 105                         | Scalpel Blades               | 93                 |
| Desoldering Pumps                 | 105                         | Scalpel Handles              | 93                 |
| Desoldering Wick                  | 106                         | Scissors                     | 95,96              |
| Dies for Crimping Tools           | 98,99                       | Screwdriver Sets             | 88-90              |
| Douple Pipe Light                 | 24                          | Screwdrivers                 | 86-87              |
| E                                 |                             | Shop Microscopes             | 32                 |
| Ergo Tweezers                     | 76                          | Software                     | 8                  |
| Eye Loupes                        | 34                          | Solder                       | 106                |
| Eyepieces                         | 21                          | Solder Aid Kit               | 105                |
| E-Z Pick Tweezers                 | 78                          | Solder Reel Stand            | 106                |
| F                                 |                             | Soldering Stands             | 105                |
| Fiber Optic Area Backlights       | 24                          | Stands                       | 30-31              |
| Fiber Optic Gooseneck             | 24                          | Т                            |                    |
| Fiber Optic Illuminator           | 23,24                       | Task Lights                  | 40-42              |
| Fiber Optic Ring Light            | 24                          | Third Hand w/Tweezers        | 106                |
| Fluorescent Ring Lights           | 23                          | Titanium Tweezers            | 77                 |
| Focus Mount                       | 28                          | Tool Kits                    | 44-51              |
| G                                 |                             | Tronex Cutters               | 53-55              |
| General Purpose Tweezers          | 82-84, 85                   | Tronex Pliers                | 56                 |
| Gliding Stages                    | 22                          | Tweezer Magnifier            | 35                 |
| H                                 |                             | Tweezers                     | 71-85              |
| Headband Magnifiers               | 35                          | Tweezers Sets                | 85                 |
| Hemostats                         | 107                         | V                            |                    |
| riemosiais                        | 10/                         | Video Imaging Software       | 8                  |
|                                   | 6.7                         | Video Inspection Systems     | 6,7,10,11,12,13    |
| :340                              | 6,7                         | Wire Stripper                | 101,102,104        |
|                                   | Q                           | a vviie oiiiobet             | I IUI.IUZ.IU4      |
| i360<br>iGauge                    | 8                           |                              | ,,                 |
| iGauge<br>iLoupe                  | 4,5                         | W                            |                    |
|                                   |                             |                              | 104                |



# Part # Index

| ltem#        | Page# | Item#            | Page# | Item#             | Page# | Item#    | Page# | Item# | Page# |
|--------------|-------|------------------|-------|-------------------|-------|----------|-------|-------|-------|
| 511          | 56    | 7112             | 53    | 10168D            | 99    | 10328    | 64    | 13218 | 91    |
| 512          | 56    | 7113             | 53    | 10169D            | 98    | 10329    | 64    | 13219 | 91    |
| 513          | 56    | 7121             | 54    | 10170D            | 98    | 10329-ER | 59    | 13220 | 91    |
| 521          | 56    | 7122             | 54    | 10171D            | 99    | 10330    | 64    | 13221 | 91    |
| 531          | 56    | 7123             | 54    | 10172D            | 98    | 10330-ER | 59    | 13222 | 91    |
| 532          | 56    | 7211             | 54    | 10173D            | 99    | 10331    | 64    | 13224 | 91    |
| 541          | 56    | 7212             | 54    | 10174D            | 98    | 10331-ER | 59    | 13225 | 91    |
| 542          | 56    | 7213             | 54    | 10175D            | 99    | 10332    | 65    | 13230 | 91    |
| 711          | 56    | 7221             | 54    | 10176D            | 99    | 10333    | 61    | 13231 | 91    |
| 712          | 56    | 7222             | 54    | 10178D            | 99    | 10334    | 62    | 13500 | 91    |
| 713          | 56    | 7223             | 54    | 10179D            | 99    | 10335    | 62    | 13710 | 88    |
| 721          | 56    | 7311             | 54    | 10181             | 100   | 10501    | 66    | 13714 | 88    |
| 731          | 56    | 7312             | 54    | 10183             | 100   | 10502    | 66    | 13715 | 89    |
| 732          | 56    | 7313             | 54    | 10184             | 100   | 10503    | 66    | 13716 | 89    |
| 741          | 56    | 7421             | 54    | 10185             | 100   | 10504    | 66    | 13717 | 89    |
| 742          | 56    | 7422             | 54    | 10186             | 100   | 10521    | 67    | 13718 | 89    |
| 5049         | 54    | 7423             | 54    | 10301             | 61    | 10521EC  | 66    | 13719 | 89    |
| 5070         | 54    | 7511             | 54    | 10301-ER          | 58    | 10523H   | 67    | 13720 | 90    |
| 5071         | 55    | 7512             | 54    | 10302             | 61    | 10525    | 67    | 13721 | 90    |
| 5072         | 55    | 7513             | 54    | 10302-ER          | 58    | 10526    | 67    | 13722 | 90    |
| 5075         | 55    | 10102            | 101   | 10303             | 61    | 10527B   | 67    | 13723 | 90    |
| 5082         | 55    | 10105            | 104   | 10304             | 61    | 10754    | 68    | 13801 | 86    |
| 5111         | 53    | 10106            | 101   | 10305             | 62    | 10756    | 68    | 13802 | 86    |
| 5112         | 53    | 10106A           | 101   | 10306             | 62    | 10761    | 68    | 13803 | 86    |
| 5113         | 53    | 10106B           | 101   | 10307             | 61    | 10764    | 68    | 13804 | 86    |
| 5121         | 53    | 10110            | 101   | 10307-ER          | 58    | 10953    | 63    | 13805 | 86    |
| 5122         | 53    | 10111            | 102   | 10308             | 61    | 11012    | 95    | 13806 | 86    |
| 5123         | 53    | 10112            | 102   | 10308-ER          | 58    | 11014    | 95    | 13807 | 86    |
| 5211         | 54    | 10113            | 102   | 10310             | 62    | 11016    | 95    | 13808 | 86    |
| 5212         | 54    | 10114            | 102   | 10311             | 61    | 11022    | 95    | 13809 | 86    |
| 5213         | 54    | 10133            | 102   | 10311-ER          | 58    | 11023    | 95    | 13811 | 86    |
| 5221         | 54    | 10134            | 102   | 103115            | 61    | 11072    | 95    | 13812 | 86    |
| 5222         | 54    | 10134A           | 102   | 10311S-ER         | 58    | 11080    | 96    | 13813 | 86    |
| 5223         | 54    | 10134B           | 102   | 10312             | 62    | 11801    | 95    | 13814 | 86    |
| 5311         | 54    | 10135            | 104   | 10313             | 63    | 11802    | 95    | 13815 | 86    |
| 5312         | 54    | 10135A           | 104   | 10314             | 63    | 12001    | 107   | 13816 | 86    |
| 5313         | 54    | 10135B           | 104   | 10314-ER          | 58    | 12002    | 107   | 13817 | 86    |
| 5421         | 54    | 10136A           | 104   | 10315             | 63    | 12011    | 107   | 13821 | 86    |
| 5422         | 54    | 10136B           | 104   | 10321             | 63    | 12012    | 107   | 13822 | 86    |
| 5423         | 54    | 101305           | 104   | 10321-ER          | 59    | 12012    | 107   | 13823 | 86    |
| 5511         | 54    | 10137            | 104   | 10321-LK          | 63    | 12013    | 107   | 13824 | 86    |
| 5512         | 54    | 10130            | 103   | 10322-ER          | 59    | 12014    | 107   | 13825 | 86    |
| 5513         | 54    | 10140            | 98    | 10322-LK<br>10323 | 63    | 12013    | 107   | 13826 | 86    |
| 7049         | 54    | 10161D           | 99    | 10323<br>10323-ER | 59    | 12017    | 107   | 13827 | 86    |
| 7070         | 54    | 10161D           | 98    | 10323-LK          | 63    | 12017    | 107   | 13831 | 86    |
| 7071         | 55    | 10162D           | 98    | 10324             | 64    | 12018    | 107   | 13832 | 86    |
| 7072         | 55    | 10163D           | 99    | 10325<br>10325-ER | 59    | 12019    | 107   | 13833 | 86    |
| 7075         | 55    | 10164D           | 99    | 10325-LK<br>10326 | 64    | 12020    | 107   | 13834 | 86    |
| 7073         | 55    | 10165D           | 98    | 10326<br>10326-ER | 59    | 12201    | 107   | 13841 | 86    |
|              | 53    | 10166D<br>10167D |       | 10326-ER<br>10327 | 64    | 13016    |       | 13841 |       |
| <i>7</i> 111 | 53    | 1010/0           | 98    | 1032/             | 04    | 13010    | 91    | 13842 | 86    |

110

Inde

# Part # Index

| ltem# | Page# | Item#    | Page# | Item#    | Page# | Item#    | Page#    | Item# | Page# |
|-------|-------|----------|-------|----------|-------|----------|----------|-------|-------|
| 3843  | 86    | 15021    | 51    | 18049ACU | 73    | 18415    | 82       | 18768 | 79    |
| 13844 | 86    | 15201    | 45    | 18049-ER | 76    | 18417    | 82       | 18801 | 80    |
| 13845 | 86    | 15210    | 46    | 18049EZ  | 78    | 18419    | 83       | 18802 | 80    |
| 13846 | 86    | 17012    | 106   | 18049TT  | 75    | 18421    | 83       | 18803 | 80    |
| 13847 | 86    | 17522    | 105   | 18049USA | 73    | 18423    | 83       | 18804 | 80    |
| 13848 | 86    | 17523    | 105   | 18050USA | 74    | 18425    | 83       | 18810 | 80    |
| 13850 | 87    | 17524    | 105   | 18053ACU | 72    | 18426    | 83       | 18811 | 80    |
| 13851 | 87    | 17531    | 105   | 18053TT  | 75    | 18428    | 83       | 18812 | 80    |
| 13900 | 87    | 17533    | 105   | 18053USA | 72    | 18430    | 82       | 18813 | 80    |
| 13901 | 87    | 17535    | 105   | 18054    | 73    | 18431    | 82       | 18820 | 80    |
| 13902 | 87    | 17536    | 105   | 18056ACU | 73    | 18432    | 82       | 20031 | 108   |
| 13903 | 87    | 17537    | 105   | 18056-ER | 76    | 18433    | 82       | 20032 | 108   |
| 13904 | 87    | 17540    | 106   | 18056EZ  | 78    | 18434    | 82       | 20033 | 108   |
| 13905 | 87    | 17541    | 106   | 18056TT  | 77    | 18435    | 82       | 20034 | 108   |
| 13906 | 87    | 17542    | 106   | 18056USA | 73    | 18436    | 82       | 20035 | 108   |
| 13907 | 87    | 17549    | 106   | 18057    | 74    | 18437    | 82       | 20036 | 108   |
| 13910 | 87    | 17551    | 106   | 18059ACU | 74    | 18438    | 82       | 20037 | 108   |
| 13911 | 87    | 17552    | 106   | 18059USA | 74    | 18472    | 85       | 20038 | 108   |
| 13912 | 87    | 17553    | 106   | 18062ACU | 74    | 18473    | 85       | 20039 | 108   |
| 13913 | 87    | 17554    | 106   | 18062-ER | 76    | 18475ACU | 85       | 20040 | 108   |
| 13914 | 87    | 17555    | 106   | 18062EZ  | 78    | 18475USA | 85       | 20210 | 108   |
| 13915 | 87    | 17560    | 106   | 18062TT  | 77    | 18476ACU | 85       | 26000 | 34    |
| 13916 | 87    | 18011    | 71    | 18062USA | 74    | 18476USA | 85       | 26001 | 33    |
| 13920 | 87    | 18013EZ  | 78    | 18065ACU | 74    | 18480EZ  | 78       | 26002 | 33    |
| 13921 | 87    | 18013TT  | 77    | 18065USA | 74    | 18478    | 85       | 26003 | 33    |
| 13922 | 87    | 18013USA | 71    | 18066ACU | 75    | 18481    | 83       | 26004 | 33    |
| 13923 | 87    | 18014    | 71    | 18066USA | 75    | 18482    | 83       | 26005 | 33    |
| 13924 | 87    | 18016    | 71    | 18067    | 74    | 18483    | 83       | 26006 | 33    |
| 13925 | 87    | 18021    | 71    | 18069ACU | 74    | 18484    | 84       | 26010 | 34    |
| 13926 | 87    | 18023USA | 71    | 18069TT  | 75    | 18485    | 84       | 26011 | 34    |
| 13927 | 87    | 18026    | 72    | 18069USA | 74    | 18486    | 84       | 26012 | 34    |
| 13930 | 87    | 18026ACU | 72    | 18070    | 75    | 18487    | 84       | 26013 | 34    |
| 13931 | 87    | 18027    | 72    | 18072ACU | 75    | 18488    | 84       | 26030 | 35    |
| 13932 | 87    | 18029ACU | 72    | 18072-ER | 76    | 18489    | 84       | 26031 | 35    |
| 13933 | 87    | 18032ACU | 71    | 18072EZ  | 78    | 18490    | 84       | 26034 | 34    |
| 13934 | 87    | 18032AC0 | 76    | 18072TT  | 77    | 18491    | 84       | 26041 | 34    |
| 13935 | 87    | 18032-EK | 78    | 18072USA | 75    | 18492    | 84       | 26041 | 34    |
| 13936 | 87    | 18032TT  | 77    | 18074USA | 75    | 18494    | 84       | 26042 | 34    |
| 13940 | 88    | 18032USA | 71    | 1807403A | 74    | 18511    | 81       | 26051 | 34    |
| 13941 | 88    | 1803203A | 71    | 18070ACU | 75    | 18514    | 81       | 26052 | 34    |
| 15001 | 48    | 18034    | 71    | 18077ACU | 74    | 18517    | 81       | 26101 | 35    |
| 15001 | 48    | 18037ACU | 71    | 18079ACU | 73    | 18520    | 81       | 26101 | 35    |
| 15002 | 50    | 18037AC0 | 71    | 18114ACU | 75    | 18523    | 81       | 26102 | 35    |
| 15003 | 49    | 18040ACU | 72    | 18115ACU | 75    | 18526    | 81       | 26103 | 35    |
| 15004 | 50    | 18040USA | 72    | 18201    | 73    | 18529    | -        | 26104 | 35    |
| 15005 | 47    | _1       | 72    | 18201    | 73    |          | 81<br>79 | 26105 | 35    |
|       |       | 18043ACU |       | -8       |       | 18702    |          |       |       |
| 15007 | 48    | 18043USA | 72    | 18400    | 82    | 18704    | 79       | 26107 | 35    |
| 15014 | 51    | 18046ACU | 73    | 18401    | 82    | 18760    | 79       | 26108 | 35    |
| 15018 | 47    | 18046TT  | 77    | 18402    | 82    | 18762    | 79       | 26109 | 35    |
| 15019 | 51    | 18046USA | 73    | 18403    | 82    | 18767    | 79       | 26110 | 35    |



## Part # Index

| ALL    |       |
|--------|-------|
| Item#  | Page# |
| 26111  | 35    |
| 26112  | 35    |
| 26113  | 35    |
| 26221  | 35    |
| 26222  | 35    |
| 26521  | 42    |
| 26522  | 42    |
| 26523  | 42    |
| 26524  | 42    |
| 26525  | 42    |
| 44011  | 92    |
| 44012  | 92    |
| 44013  | 92    |
| 44014  | 92    |
| 44015  | 93    |
| 44016  | 93    |
| 44017  | 93    |
| 44018  | 92    |
| 44030  | 93    |
| 44031  | 93    |
| 44032  | 93    |
| 44033  | 93    |
| 44041  | 93    |
| 44042  | 93    |
| 44043  | 93    |
| 44044  | 93    |
| 44045  | 93    |
| 44101  | 94    |
| 44102  | 94    |
| 44201  | 94    |
| 44202  | 94    |
| 44203  | 94    |
| 44204  | 94    |
| 44205  | 94    |
| 44205S | 94    |
| 44206  | 94    |
| 44206S | 94    |
| 44211  | 94    |
| 44212  | 94    |
| 44213  | 94    |
| 44214  | 94    |
| 44215  | 94    |
| 44216  | 94    |
| 44217  | 94    |
| 44218  | 94    |
| 44221  | 94    |
| 44222  | 94    |
| 44223  | 94    |
| 44224  | 94    |
| 44225  | 94    |
|        | III.  |

| Item#                  | Page# |
|------------------------|-------|
| 44226                  | 94    |
| 44227                  | 94    |
| 44228                  | 94    |
| 44229                  | 94    |
| 44230                  | 94    |
| 44231                  | 94    |
| 44254                  | 93    |
| 44256                  | 93    |
| 44257                  | 93    |
| 26100-100              | 26    |
| 26100-102              | 26    |
| 26100-212              | 27    |
| 26100-215              | 26    |
| 26100-216              | 26    |
| 26100-220              | 26    |
| 26100-221              | 26    |
| 26100-222              | 26    |
| 26100-230              | 25    |
| 26100-403              | 7     |
| 26100-405              | 8     |
| 26200A-200             | 24    |
| 26200A-205             | 23    |
| 26200A-207             | 23    |
| 26200A-212             | 24    |
| 26200A-402             | 24    |
| 26200A-403             | 24    |
| 26200A-523             | 24    |
| 26200A-532             | 24    |
| 26200R-201             | 23    |
| 26200B-201             | 23    |
| 26200B-202             | 23    |
| 26200B-206             | 23    |
| 26200B-207             | 23    |
| 26200B-207             | 23    |
| 26200B-210             | 23    |
| 26200B-210             | 23    |
| 26501-AL3              | 37    |
| 26501-ALS              | 37    |
| 26501-DSG              | 37    |
| 26501-D3G              | 37    |
| 26501-SLA              | 37    |
| 26501-SLA<br>26501-WB  | 37    |
| 26503-B32              | 38    |
| 26503-B32<br>26503-SIV |       |
| 26504-SBK              | 38    |
| 26504-SBK<br>26505-B09 | 39    |
|                        | 38    |
| 26505-ESD              | 38    |
| 26505-SIV              | 38    |
| 26506-BT4              | 38    |
| 26506-SIV              | 39    |

| Item#        | Page# |
|--------------|-------|
| 26507-SBK    | 40    |
| 26511-SSL    | 40    |
| 26512-SBK    | 40    |
| 26515-SIV    | 41    |
| 26516-D155   | 41    |
| 26516-D3T    | 42    |
| 26516-SIV    | 41    |
| 26520-MB     | 42    |
| 26700-102-00 | 10    |
| 26700-102-10 | 11    |
| 26700-102-15 | 11    |
| 26700-103-00 | 13    |
| 26700-106-10 | 7     |
| 26700-106-14 | 7     |
| 26700-106-20 | 7     |
| 26700-402    | 27    |
| 26700-404    | 27    |
| 26700-501-10 | 4     |
| 26700-501-20 | 4     |
| 26700-501-30 | 4     |
| 26700-501P   | 4     |
| 26700-501S   | 4     |
| 26700-505    | 4     |
| 26700-506    | 4     |
| 26800B-305   | 19    |
| 26800B-361   | 18    |
| 26800B-362   | 18    |
| 26800B-369   | 19    |
| 26800B-370   | 19    |
| 26800B-371   | 19    |
| 26800B-435   | 22    |
| 26800B-441   | 21    |
| 26800B-442   | 21    |
| 26800B-443   | 21    |
| 26800B-444   | 21    |
| 26800B-445   | 21    |
| 26800B-446   | 21    |
| 26800B-448   | 21    |
| 26800B-449   | 21    |
| 26800B-450   | 21    |
| 26800B-452   | 21    |
| 26800B-453   | 21    |
| 26800B-455   | 21    |
| 26800B-456   | 21    |
| 26800B-457   | 21    |
| 26800B-458   | 21    |
| 26800B-459   | 21    |
| 26800B-461   | 22    |
| 26800B-462   | 22    |
| 26800B-463   | 22    |
|              | _     |

| Item#      | Page# |
|------------|-------|
| 26800B-464 | 22    |
| 26800B-465 | 22    |
| 26800B-471 | 22    |
| 26800B-472 | 22    |
| 26800B-474 | 22    |
| 26800B-475 | 22    |
| 26800B-476 | 22    |
| 26800B-520 | 29    |
| 26800B-525 | 29    |
| 26800B-530 | 29    |
| 26800B-532 | 32    |
| 26800B-535 | 30    |
| 26800B-540 | 30    |
| 26800B-545 | 30    |
| 26800B-550 | 31    |
| 26800B-555 | 31    |
| 26800B-560 | 31    |
| 26800B-570 | 31    |
| 26800B-575 | 31    |
| 26800C-531 | 32    |
| 26800C-533 | 32    |
| 26800C-534 | 33    |
| 26800C-536 | 33    |
| 26800C-538 | 33    |
| 26800C-540 | 33    |
| DSZ-44     | 16    |
| DSZ-70     | 17    |
| DSZT-44    | 16    |
| DSZT-70    | 17    |
| NSW-1      | 18    |
| NSW-2      | 18    |
| NSW-20     | 18    |
| NSW-30     | 18    |
| NSW-40     | 18    |
| NSW-620    | 18    |
| SCW-PA     | 28    |
| SPZ-50     | 15    |
| SPZT-50    | 15    |
| Stand L    | 29    |
| Stand P    | 28    |
| Stand PF   | 28    |
| Stand PFL  | 28    |
| Stand PFM  | 28    |
| Stand T    | 29    |
|            |       |



New Products

## Magna Deluxe XL 3 Tube Flourescent Lamp



#### 2 in 1 Combination Scissors

Scissors
page 96

## **Crimping Tool for Micro Connectors**



## White LED Ring Light w/Brightness & Sector Control

page 23



## E-Z Pick Tweezers w/Protective Pouch



### **Titanium Tweezers**

page 77



## **Tronex Precision Cutters**

page 52







4595 Platt Road | Ann Arbor, MI 48108 Tel: 734-973-0099 | Fax: 734-973-0097 Email: info@aveninc.com | www.aveninc.com

Distributed by: