


**Data sheet | Item number: 859-308**

Relay module; Nominal input voltage: 220 VDC; 1 changeover contact; Red status indicator; Module width: 6 mm; 2,50 mm<sup>2</sup>; gray




[www.wago.com/859-308](http://www.wago.com/859-308)

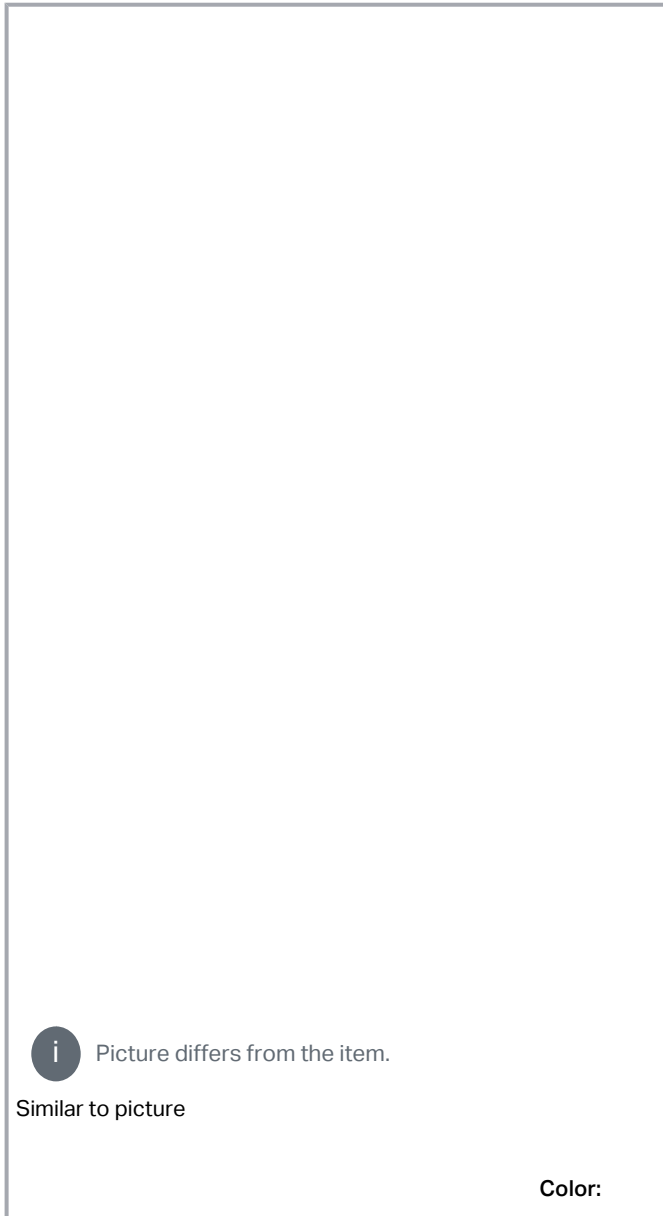

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



DC load limit curve

## Data

### Notes

Note

To protect the relay coils and contacts, inductive loads must be dampened with an effective protection circuit.

---

## Technical data

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Control Circuit

Nominal input voltage $U_N$	DC 220 V
Input voltage range	-15 ... +20 %
Nominal input current at $U_N$	4 mA

## Load circuit

Number of changeover/switchover contacts	1
Contact material (relay)	AgSnO <sub>2</sub>
Limiting continuous current	5 A
Inrush current (resistive) max.	(AC) 20 A / 0.02 s
Switching voltage (max.)	AC 250 V
Switching power (resistive) max.	AC 1250 VA; DC (see load limit curve)
Switching capacity	AC-15: 3 A / AC 250 V; DC-13: 2 A / DC 24 V
Recommended minimum load	10 V / 10 mA; 24 V / 1 mA
Pull-in time (typ.)	15 ms
Drop-out time (typ.)	25 ms
Bounce time (typ.)	3.5 ms
Electrical life (NO; resistive load; 23 °C)	50 x 10 <sup>3</sup> switching operations
Mechanical life	5 x 10 <sup>6</sup> switching operations
Switching frequency with/without load (max.)	6 min <sup>-1</sup> / 180 min <sup>-1</sup>

## Signaling

Status indicator	Red LED
------------------	---------

## Safety and protection

Rated voltage	300 V
Rated surge voltage	4 kV
Overvoltage category	III
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	4 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Insulation type (control/load circuit)	Reinforced insulation (safe isolation)
Insulation type (adjacent devices)	Reinforced insulation (safe isolation)
Protection type	IP20; in connected state or when using 859-525 end plate

Subject to changes. Please also observe the further product documentation!



## Connection data

Connection technology	CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.08 ... 1.5 mm <sup>2</sup> / 28 ... 16 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

## Physical data

Width	6 mm / 0.236 inches
Height	91 mm / 3.583 inches
Depth from upper-edge of DIN-rail	56 mm / 2.205 inches

## Mechanical data

Mounting type	DIN-35 rail
Mounting position	Horizontal (standing/lying); vertical

## Material Data

Color	gray
Fire load	0.338 MJ
Weight	22.8 g

## Environmental requirements

Ambient temperature (operation at U <sub>N</sub> )	-40 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	≥ (T <sub>ambient</sub> + 20 K)
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

## Standards and specifications

Standards/specifications	EN 61010-2-201 EN 61810-1 EN 61373 UL 508 DNV
--------------------------	---

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 8.0	EC001437
ETIM 7.0	EC001437
PU (SPU)	10 pcs
Packaging type	box
Country of origin	DE
GTIN	4055143603102
Customs tariff number	85364900990

## Environmental Product Compliance

CAS-No.	1303-86-2 1317-36-8 7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-I
SCIP notification number (Austria)	737a6eb1-23d7-4620-8349-27099ac2267f
SCIP notification number (Belgium)	4e3b46c1-1907-4651-90fa-ea76fb2274f8
SCIP notification number (Bulgaria)	031ecb84-0cea-4228-910b-74e8dc98ebe1
SCIP notification number (Czech Republic)	ca08bde4-a9dc-4708-970a-0392d645491b
SCIP notification number (Denmark)	4379f4c4-74ff-4c25-9c31-81c81367db38
SCIP notification number (Finland)	3c788d20-1e30-4eb7-b541-05119d1f9c2a
SCIP notification number (France)	d3ae6427-946f-44ad-b4a8-b6929a7a72fa
SCIP notification number (Germany)	a623cb97-fa90-4da9-bed8-1ae9e168b73d
SCIP notification number (Hungary)	4d00e091-130a-4911-a207-5b85331c79dd
SCIP notification number (Italy)	15af0681-f8af-4c06-bb93-7c926ec0d24a
SCIP notification number (Netherlands)	c0084684-345d-40a8-a5a4-880690a0f544
SCIP notification number (Poland)	4c87d690-db69-43d8-b9ce-0f4af6074975
SCIP notification number (Romania)	af0ef8dc-f9ec-4135-9038-b356d723668b
SCIP notification number (Sweden)	c700b5fc-0393-4cff-bb22-1754b9e0b98a

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>UL</b> Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199 Sec.4

### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	<b>EU-Declaration of Conformity</b> WAGO GmbH & Co. KG	-	-
	<b>UK-Declaration of Conformity</b> WAGO GmbH & Co. KG	-	-

### Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	<b>DNV</b> DNV Germany GmbH	DNV-CG-0339, Aug. 2021	TAA00001D1
	<b>PRS</b> Polski Rejestr Statków	-	TE/2186 /880590/18

### Approvals for hazardous areas

Logo	Approval	Additional Approval Text	Certificate name
	<b>CCC</b> CNEX	CNCA-C23-01	2021312304000982 (Ex ec nC IIC T4 Gc)
	<b>UKEx</b> WAGO GmbH & Co. KG	EN 60079-0	UKCA_WAGO22UKEX007X_ec nC

## Optional accessories

### Testing and measuring

#### Testing accessories

**Item no.: 859-500**

WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 10 mm uninsulated; Test lead for soldering up to 0,5mm<sup>2</sup> [www.wago.com/859-500](http://www.wago.com/859-500)

#### Jumpers

##### Jumper

**Item no.: 859-404/000-005**

Jumper; for jumper slot; 4-way; insulated; red

[www.wago.com/859-404/000-005](http://www.wago.com/859-404/000-005)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 859-404/000-006**  
Jumper; for jumper slot; 4-way; insulated; blue

[www.wago.com/859-404/000-006](http://www.wago.com/859-404/000-006)

**Item no.: 859-405/000-005**  
Jumper; for jumper slot; 5-way; insulated; red

[www.wago.com/859-405/000-005](http://www.wago.com/859-405/000-005)

**Item no.: 859-405/000-029**  
Jumper; for jumper slot; 5-way; insulated; yellow

[www.wago.com/859-405/000-029](http://www.wago.com/859-405/000-029)

**Item no.: 859-405**  
Jumper; for jumper slot; 5-way; insulated; light gray

[www.wago.com/859-405](http://www.wago.com/859-405)

**Item no.: 859-404/000-029**  
Jumper; for jumper slot; 4-way; insulated; yellow

[www.wago.com/859-404/000-029](http://www.wago.com/859-404/000-029)

**Item no.: 859-405/000-006**  
Jumper; for jumper slot; 5-way; insulated; blue

[www.wago.com/859-405/000-006](http://www.wago.com/859-405/000-006)

**Item no.: 859-406/000-005**  
Jumper; for jumper slot; 6-way; insulated; red

[www.wago.com/859-406/000-005](http://www.wago.com/859-406/000-005)

**Item no.: 859-409/000-029**  
Jumper; for jumper slot; 9-way; insulated; yellow

[www.wago.com/859-409/000-029](http://www.wago.com/859-409/000-029)

**Item no.: 859-410/000-005**  
Jumper; for jumper slot; 10-way; insulated; red

[www.wago.com/859-410/000-005](http://www.wago.com/859-410/000-005)

**Item no.: 859-410/000-029**  
Jumper; for jumper slot; 10-way; insulated; yellow

[www.wago.com/859-410/000-029](http://www.wago.com/859-410/000-029)

**Item no.: 859-410**  
Jumper; for jumper slot; 10-way; insulated; light gray

[www.wago.com/859-410](http://www.wago.com/859-410)

**Item no.: 859-410/000-006**  
Jumper; for jumper slot; 10-way; insulated; blue

[www.wago.com/859-410/000-006](http://www.wago.com/859-410/000-006)

**Item no.: 859-403/000-005**  
Jumper; for jumper slot; 3-way; insulated; red

[www.wago.com/859-403/000-005](http://www.wago.com/859-403/000-005)

**Item no.: 859-402/000-029**  
Jumper; for jumper slot; 2-way; insulated; yellow

[www.wago.com/859-402/000-029](http://www.wago.com/859-402/000-029)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 859-403/000-029**  
Jumper; for jumper slot; 3-way; insulated; yellow

[www.wago.com/859-403/000-029](http://www.wago.com/859-403/000-029)

**Item no.: 859-403/000-006**  
Jumper; for jumper slot; 3-way; insulated; blue

[www.wago.com/859-403/000-006](http://www.wago.com/859-403/000-006)

**Item no.: 859-408/000-005**  
Jumper; for jumper slot; 8-way; insulated; red

[www.wago.com/859-408/000-005](http://www.wago.com/859-408/000-005)

**Item no.: 859-408/000-029**  
Jumper; for jumper slot; 8-way; insulated; yellow

[www.wago.com/859-408/000-029](http://www.wago.com/859-408/000-029)

**Item no.: 859-409**  
Jumper; for jumper slot; 9-way; insulated; light gray

[www.wago.com/859-409](http://www.wago.com/859-409)

**Item no.: 859-408/000-006**  
Jumper; for jumper slot; 8-way; insulated; blue

[www.wago.com/859-408/000-006](http://www.wago.com/859-408/000-006)

**Item no.: 859-403**  
Jumper; for jumper slot; 3-way; insulated; light gray

[www.wago.com/859-403](http://www.wago.com/859-403)

**Item no.: 859-409/000-005**  
Jumper; for jumper slot; 9-way; insulated; red

[www.wago.com/859-409/000-005](http://www.wago.com/859-409/000-005)

**Item no.: 859-404**  
Jumper; for jumper slot; 4-way; insulated; light gray

[www.wago.com/859-404](http://www.wago.com/859-404)

**Item no.: 859-409/000-006**  
Jumper; for jumper slot; 9-way; insulated; blue

[www.wago.com/859-409/000-006](http://www.wago.com/859-409/000-006)

**Item no.: 859-402/000-006**  
Jumper; for jumper slot; 2-way; insulated; blue

[www.wago.com/859-402/000-006](http://www.wago.com/859-402/000-006)

**Item no.: 859-402**  
Jumper; for jumper slot; 2-way; insulated; light gray

[www.wago.com/859-402](http://www.wago.com/859-402)

**Item no.: 859-402/000-005**  
Jumper; for jumper slot; 2-way; insulated; red

[www.wago.com/859-402/000-005](http://www.wago.com/859-402/000-005)

**Item no.: 859-406/000-006**  
Jumper; for jumper slot; 6-way; insulated; blue

[www.wago.com/859-406/000-006](http://www.wago.com/859-406/000-006)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 859-406/000-029**

Jumper; for jumper slot; 6-way; insulated; signal yellow

[www.wago.com/859-406/000-029](http://www.wago.com/859-406/000-029)**Item no.: 859-407/000-006**

Jumper; for jumper slot; 7-way; insulated; blue

[www.wago.com/859-407/000-006](http://www.wago.com/859-407/000-006)**Item no.: 859-407/000-005**

Jumper; for jumper slot; 7-way; insulated; red

[www.wago.com/859-407/000-005](http://www.wago.com/859-407/000-005)**Item no.: 859-407/000-029**

Jumper; for jumper slot; 7-way; insulated; yellow

[www.wago.com/859-407/000-029](http://www.wago.com/859-407/000-029)**Item no.: 859-407**

Jumper; for jumper slot; 7-way; insulated; light gray

[www.wago.com/859-407](http://www.wago.com/859-407)**Marking accessories**

## Marking device

**Item no.: 210-110**

Fiber-tip pen

[www.wago.com/210-110](http://www.wago.com/210-110)

## Marker

**Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 248-501**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)**Item no.: 248-504**

Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/248-504](http://www.wago.com/248-504)**Item no.: 248-503**

Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/248-503](http://www.wago.com/248-503)**Item no.: 248-506**

Mini-WSB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/248-506](http://www.wago.com/248-506)**Item no.: 248-502**

Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/248-502](http://www.wago.com/248-502)**End plate**

## Intermediate plate

**Item no.: 859-525**

End and intermediate plate; 1 mm thick; gray

[www.wago.com/859-525](http://www.wago.com/859-525)**Ferrule**

## Ferrule

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



<b>Item no.: 216-223</b> Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; red	<a href="http://www.wago.com/216-223">www.wago.com/216-223</a>
<b>Item no.: 216-222</b> Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray	<a href="http://www.wago.com/216-222">www.wago.com/216-222</a>
<b>Item no.: 216-221</b> Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; white	<a href="http://www.wago.com/216-221">www.wago.com/216-221</a>
<b>Item no.: 216-224</b> Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; black	<a href="http://www.wago.com/216-224">www.wago.com/216-224</a>
<b>Item no.: 216-321</b> Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow	<a href="http://www.wago.com/216-321">www.wago.com/216-321</a>
<b>Item no.: 216-322</b> Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated; light turquoise	<a href="http://www.wago.com/216-322">www.wago.com/216-322</a>
<b>Tool</b>	
Operating tool	
<b>Item no.: 210-720</b> Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	<a href="http://www.wago.com/210-720">www.wago.com/210-720</a>

## Downloads

### Documentation

#### Bid Text

859-308 docx - Datei	2019 年2月20 日	docx 17.1 kB	Download
859-308 X81 - Datei	2019 年2月19 日	xml 4.6 kB	Download

#### Instruction Leaflet

CCC Ex (Additional information) 859-***	2023 年4月26 日	pdf 135.9 kB	Download
Relay modules, Optocoupler modules	V 2.0.0 2022 年1月19 日	pdf 2.1 MB	Download

#### Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 年8月18 日	pdf 2.2 MB	Download
---	-------------------------	---------------	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## CAD/CAE-Data

### CAD data

2D/3D Models 859-308	<a href="#">URL</a>	<a href="#">Download</a>
----------------------	---------------------	--------------------------

### CAE data

EPLAN Data Portal 859-308	<a href="#">URL</a>	<a href="#">Download</a>
---------------------------	---------------------	--------------------------

WSCAD Universe 859-308	<a href="#">URL</a>	<a href="#">Download</a>
------------------------	---------------------	--------------------------

ZUKEN Portal 859-308	<a href="#">URL</a>	<a href="#">Download</a>
----------------------	---------------------	--------------------------

## Environmental Product Compliance


### Compliance Search

Environmental Product Compliance 859-308	<a href="#">URL</a>	<a href="#">Download</a>
--	---------------------	--------------------------

Relay module; Nominal input voltage: 220 VDC; 1 changeover contact; Red status indicator; Module width: 6 mm; 2,50 mm<sup>2</sup>; gray

## Installation Notes

### Conductor termination



Conductor termination

### Commoning

Subject to changes. Please also observe the further product documentation!



Easy commoning using adjacent jumpers

### Marking



Marking via Mini-WSB Quick Marking System

Subject to changes. Please also observe the further product documentation!