

6

5

4





3

2

1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/17/07	
A		UPDATED SPECIFICATIONS	7/28/09	
B		REVISED SHAPE	3/23/11	
C		UPDATE DRAWING	1/19/19	AYTY

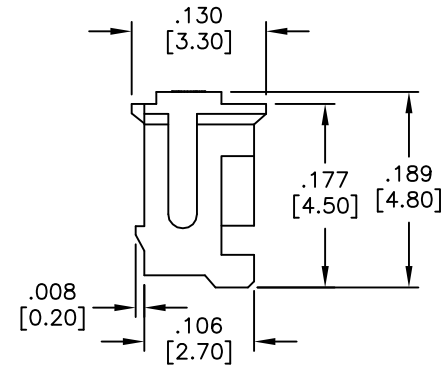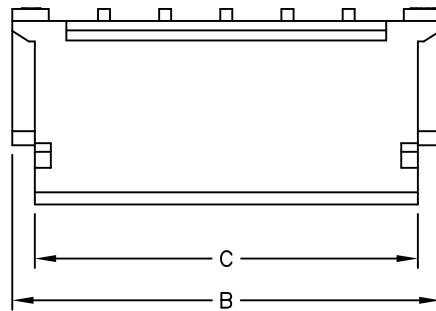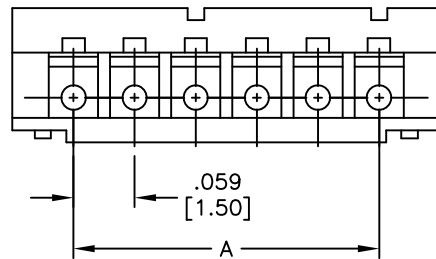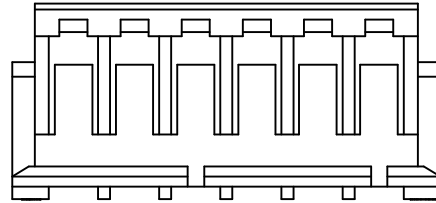

SPECIFICATIONS:

Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Natural

Electrical:

Current rating: 1A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 15

A = .059 [1.50] X No. of Spaces.

B = .059 [1.50] X No. of Spaces + .118 [3.00].

C = .059 [1.50] X No. of Spaces + .075 [1.90].

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES		HOLES		TITLE	
.X ± .10	∅X ± .10	ZH 1.50mm HOUSING			
.XX ± .020	∅XX ± .015	APPROVALS		DATE	
.XXX ± .015	∅XXX ± .010	DRAWN	BW	01/17/07	
APPROVED		CHECKED			
SIZE	PART NO.	REV.			
X	15CH-A-XX	B			
REF:	S00124T	SCALE:	NTS	SHEET 1 OF 1	

6

5

4

3

2

1