

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PVC, yellow, shielded, Plug straight M12, coding: A, on Socket straight M12, coding: A, cable length: 15 m

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1417888 |
| Packing unit | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF13 |
| Product key | BF1IDA |
| GTIN | 4055626210995 |
| Weight per piece (including packing) | 22.22 g |
| Weight per piece (excluding packing) | 22.22 g |
| Customs tariff number | 85444290 |
| Country of origin | US |

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Number of positions | 3 |
| Application | Standard, U.S. cables |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | A |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |
| Outer sheath, material | PVC |

Electrical properties

| | |
|-----------------------|----------------------------|
| Contact resistance | $\leq 5 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A |
| Protective circuit | unwired |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | No |
| Status display present | No |

Connection data

Conductor connection

| | |
|-------------------|------------------------|
| Tightening torque | 0.4 Nm (M12 connector) |
|-------------------|------------------------|

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

Connector

Connection 1

| | |
|---------------------|-------------------|
| Type | Plug straight M12 |
| Number of positions | 3 |
| Coding type | A |
| Number of positions | 3 |


Connection 2

| | |
|---------------------|---------------------|
| Type | Socket straight M12 |
| Number of positions | 3 |
| Coding type | A |
| Number of positions | 3 |

Cable/line

| | |
|--------------|------|
| Cable length | 15 m |
|--------------|------|

PVC yellow 105 °C [542]

| | |
|---------------------------------|--|
| Dimensional drawing |  |
| Cable weight | 40 kg/km |
| UL AWM Style | 2517 (105 °C / 300 V) |
| Number of positions | 3 |
| Shielded | yes |
| Cable type | PVC yellow 105 °C [542] |
| Conductor structure signal line | 30x 1.30 mm |
| AWG signal line | 22 |
| Wire diameter incl. insulation | 1.27 mm ±0.03 mm |
| External cable diameter | 5.2 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | yellow |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PVC |
| Single wire, color | brown, blue, black |
| Overall twist | 3 wires, twisted |
| Optical shield covering | 85 % |
| Max. conductor resistance | max. 50.5 Ω/km (20 °C) |
| Insulation resistance | ≥ (550 M Ohms/m @ 500V) |

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

| | |
|---|---|
| Nominal voltage, cable | 300 V |
| Minimum bending radius, flexible installation | 12 x D |
| Flame resistance | FT4 |
| Other resistance | UV resistant |
| Special properties | UL standards PLTC and ITC |
| Ambient temperature (operation) | -30 °C ... 105 °C (cable, fixed installation) |
| | -5 °C ... 105 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |


SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable

1417888

<https://www.phoenixcontact.com/us/products/1417888>


Drawings

Dimensional drawing

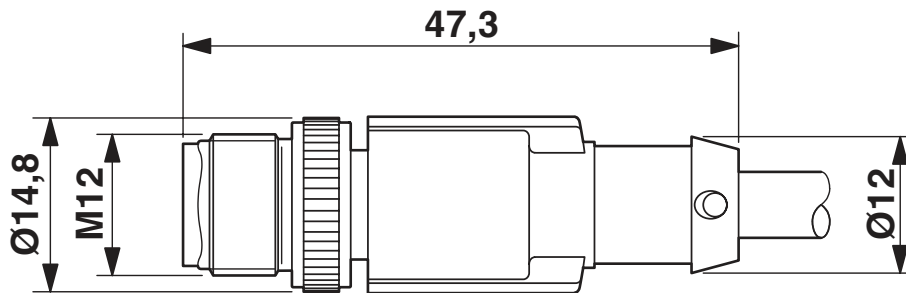

Plug, M12 x 1, straight, shielded

Schematic diagram

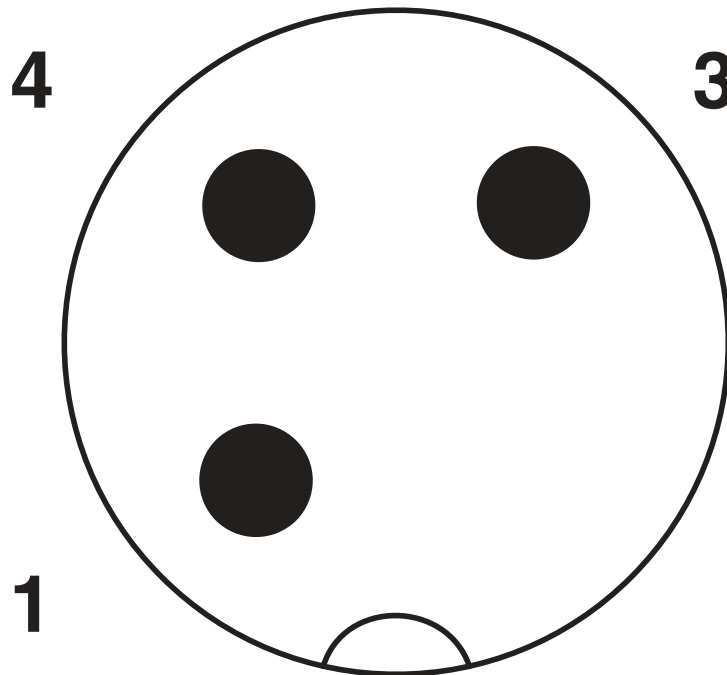


Pin assignment M12 plug, 3-pos., A-coded, view male side

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable


1417888

<https://www.phoenixcontact.com/us/products/1417888>

Circuit diagram

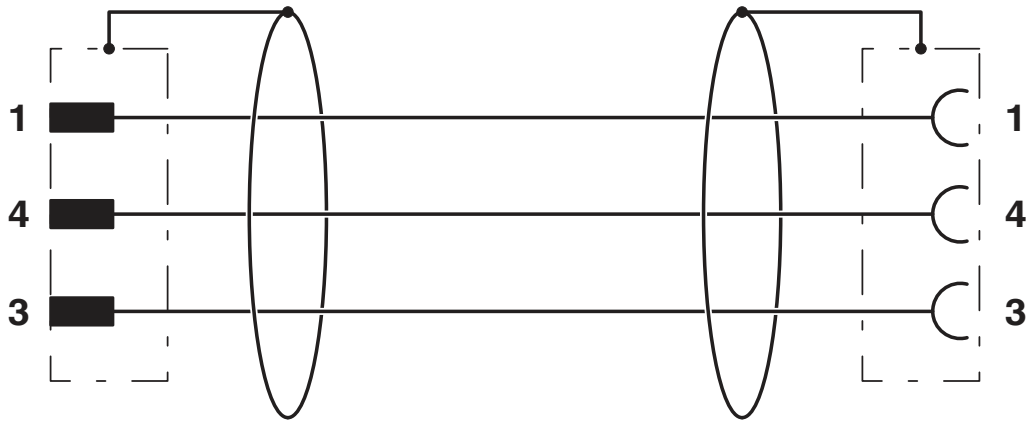

Dimensional drawing

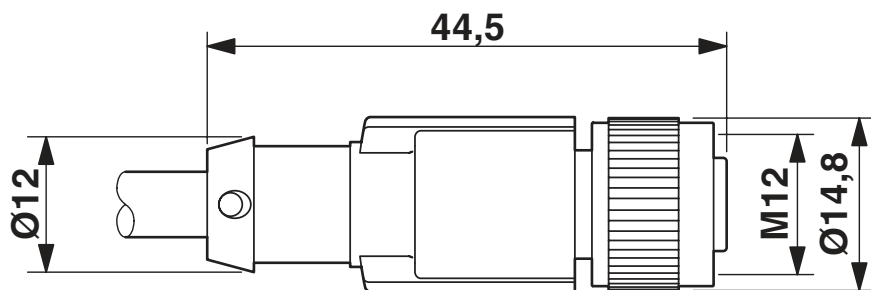

M12 x 1 socket, straight, shielded


SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

Schematic diagram

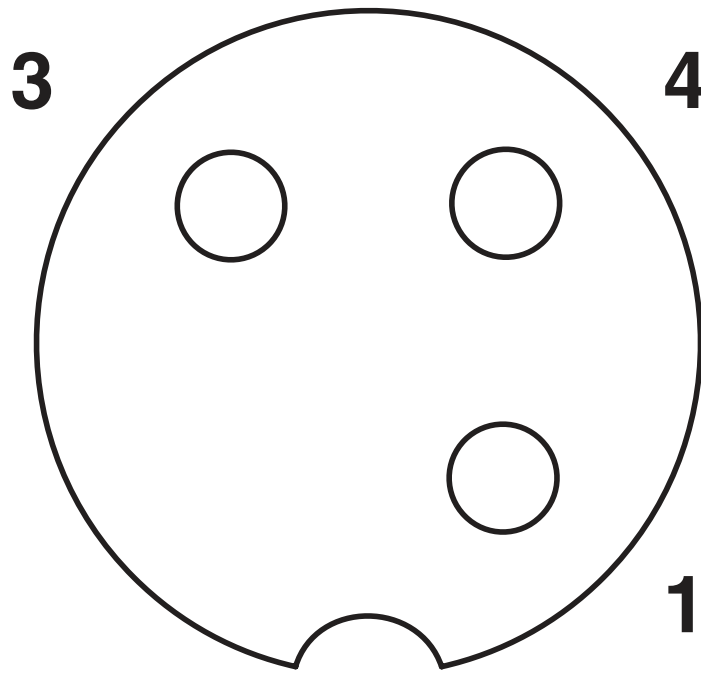

Pin assignment M12 socket, 3-pos., A-coded, view female side

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1417888>



EAC

Approval ID: RU C-DE.BL08.B.00286



UL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 300 V | 4 A | - | - |



cUL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 300 V | 4 A | - | - |

cULus Listed

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 7.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31251501 |
|-------------|----------|

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

Environmental product compliance

| | |
|------------|--|
| China RoHS | Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |
|------------|--|

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

Accessories

PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/us/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



SAC-M12-EXCLIP-M - Locking clip

1558988

<https://www.phoenixcontact.com/us/products/1558988>

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/us/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



SAC-M12-EXCLIP-F - Locking clip

1558991

<https://www.phoenixcontact.com/us/products/1558991>

Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

SAC-3P-MS/15,0-542/FSSH SCO BK - Sensor/actuator cable



1417888

<https://www.phoenixcontact.com/us/products/1417888>

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/us/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com