
REED Temperature & Humidity Monitor Model R6000



TECHNICAL DATA

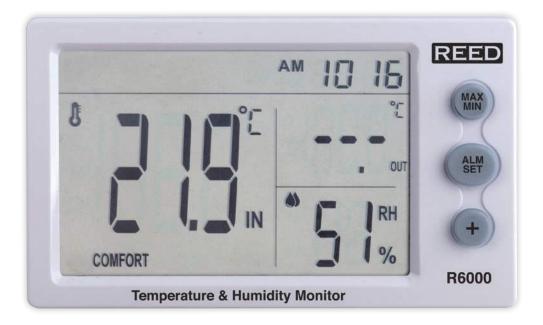

Features

- Measures indoor/outdoor temperature and humidity
- User selectable unit of measure °F/°C
- Internal memory stores min/max temperature and humidity readings
- Waterproof sensor for outdoor temperature measurement with 6' (72") cable
- Built-in alarm clock and time display
- Desktop or wall mount
- Includes battery

Specifications

Temperature (IN)

Range:	-10 to 50°C (14 to 122°F)
Accuracy:	-10 to 0°C (14 to 32°F): ±2°C (3.6°F) 0 to 40°C (32 to 104°F): ±1°C (1.8°F) 40 to 50°C (104 to 122°F): ±2°C (3.6°F)
Resolution:	0.1°C (0.1°F)

Temperature (OUT)

Range:	-40 to 50°C (-40 to 122°F)
Accuracy:	-40 to 0°C (-40 to 32°F): ±2°C (3.6°F)
	0 to 40°C (32 to 104°F): ±1°C (1.8°F)
	40 to 50°C (104 to 122°F): ±2°C (3.6°F)
Resolution:	0.1°C (0.1°F)

Humidity Range:

Accuracy*:

Resolution:

General Specifications

Humidity Comfort Icons: Sampling Time: Temperature Probe Length: Alarm Clock/Time Display: Max/Min Functions: Product Certifications: Power Supply: Operating Temperature: Dimensions: 20 to 95% RH 40 to 80% RH: ±5% RH <40 and >80% RH: ±8% RH 1% RH

Wet/Comfort/Dry 10 seconds 6' (72") Yes Yes (IN/OUT/RH) CE, RoHS 1 "AAA" Battery -10 to 50°C (14 to 122°F) 5.1 x 1 x 3.1" (130 x 22 x 78 mm) 3.9 oz (110 g)

Weight:

*Based on indoor temperature conditions between 64.4 and 82.4°F (18 to 28°C)

Model	Description
R6000	Temperature & Humidity Monitor

REED Instruments

1-877-849-2127 | info@reedinstruments.com | www.reedinstruments.com