


CUSTOMER DRAWING

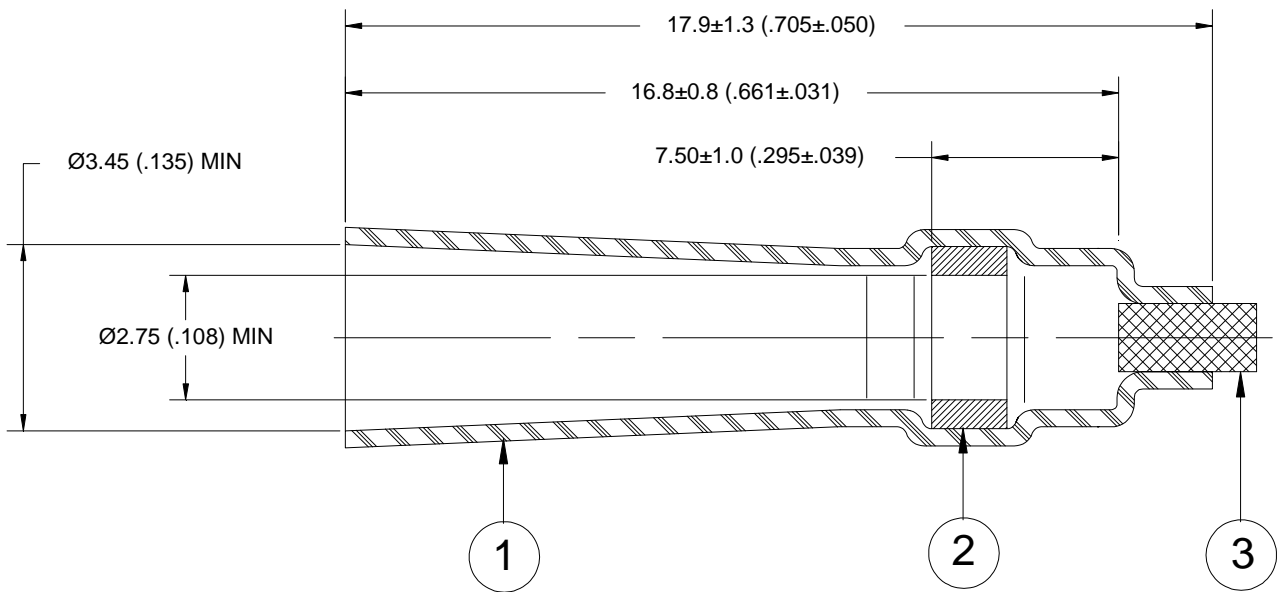


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn63 per ANSI-J-STD-006.
 FLUX: TYPE ROL1 per ANSI-J-STD-004.
3. END CLOSURE: Thermally stabilized thermoplastic.

APPLICATION

1. This part is designed to make a stub splice with wires having a combined conductor CMA of between 350 and 1400 circular mils and a combined jacket diameter between 1.27 (.050) and 3.40 (.135).
2. Part may be installed by convection heating.
3. Temperature range: -55°C to +150°C.

 TE Connectivity		Raychem Devices CUSTOMER DRAWING		TITLE:	
				SOLDERSLEEVE* STUB SPLICE	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO: D-110-0172	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: B	DATE: October 11, 2013
DRAWN BY: T.NGUYEN	CAGE CODE: 06090	ECO NUMBER: 13-015998	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2013 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.