

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: FT2

**Conductor**

Conductor count: 3  
 Gauge: 22 AWG 0.34 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing 0.16 \times 17$   
 Resistance at 20 °C: 59.4  $\Omega$  /km max

**Insulator**

Material: mPPE  
 Color: red, black, white  
 Diameter:  $\varnothing 1.3 \pm 0.10$  mm  
 Average thickness: 0.26 mm  
 Minimum thickness: 0.21 mm  
 Resistance at 20 °C: 100 M $\Omega$  /km min

**Shield**

Type: foil  
 Material: aluminum mylar  
 Coverage: 100%



**Outer jacket**

Material: mPPE, 85A  
 Color: black  
 Diameter:  $\varnothing 4.5 \pm 0.20$  mm  
 Average thickness: 0.8 mm  
 Minimum thickness: 0.56 mm

**Wire marking:** E339579 UL AWM STYLE 21509 22 AWG 105°C 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

**Bend radius**

Minimum: 6 times diameter (27 mm)

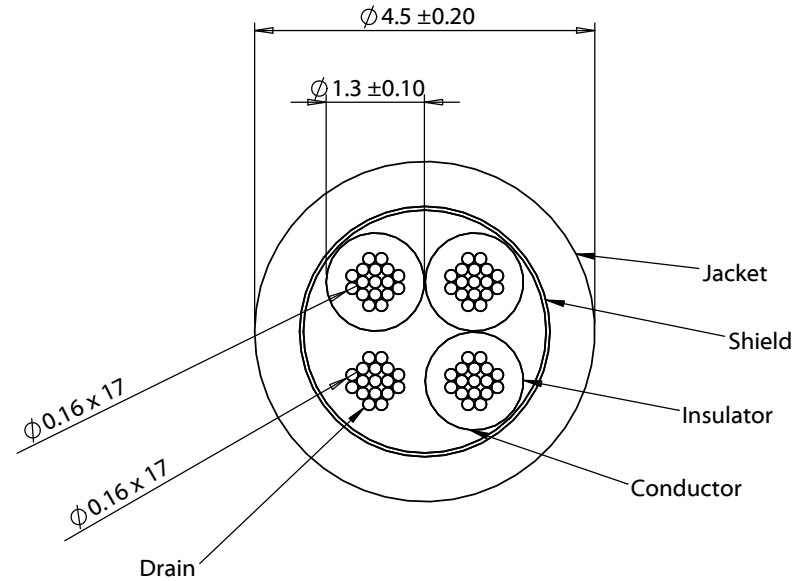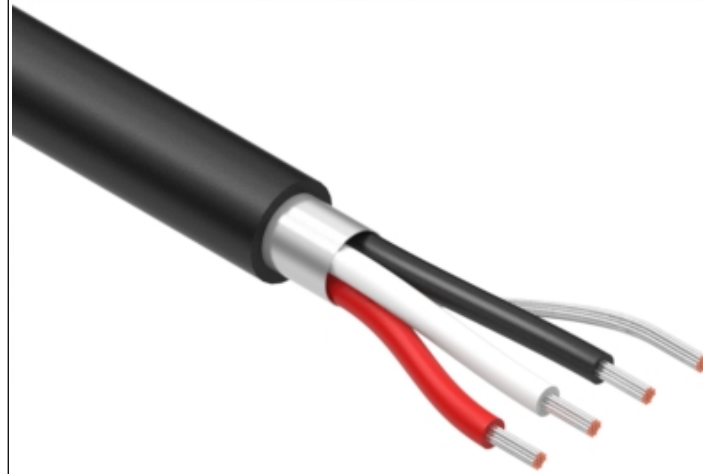

Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	4/20/2020	Initial release	JC <small>Digitally signed by JC Date: 2020.04.20 15:59:33 -07'00'</small>	RoHS compliant	
			Verified: AW <small>Digitally signed by AW Date: 2020.04.21 08:18:46 -07'00'</small>	Phthalate and halogen free	Size: Part number: A 30-01422
			Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Description: Wire, 3C TS, 22 AWG, 21509, 600V, 105C, 4.5 mm, shielded, FT2, mPPE	
					Sheet 1 of 1

5

4

3

2

1