
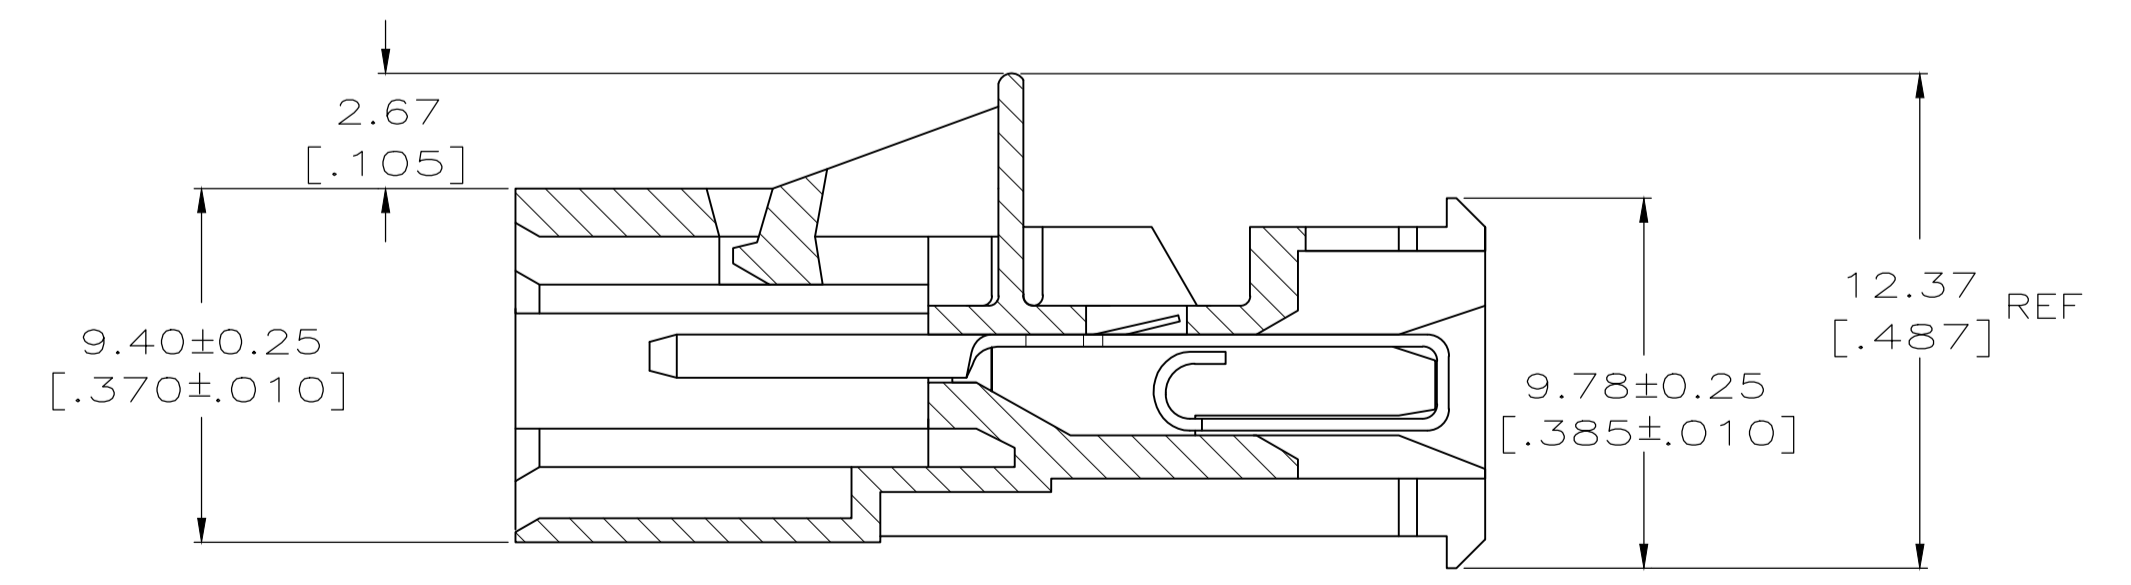
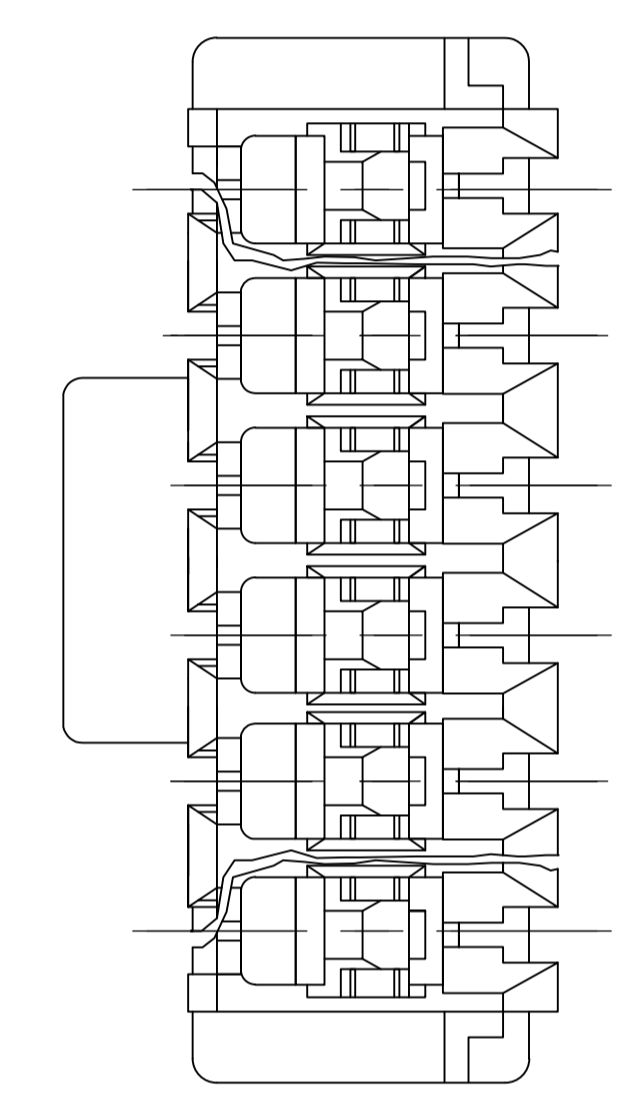
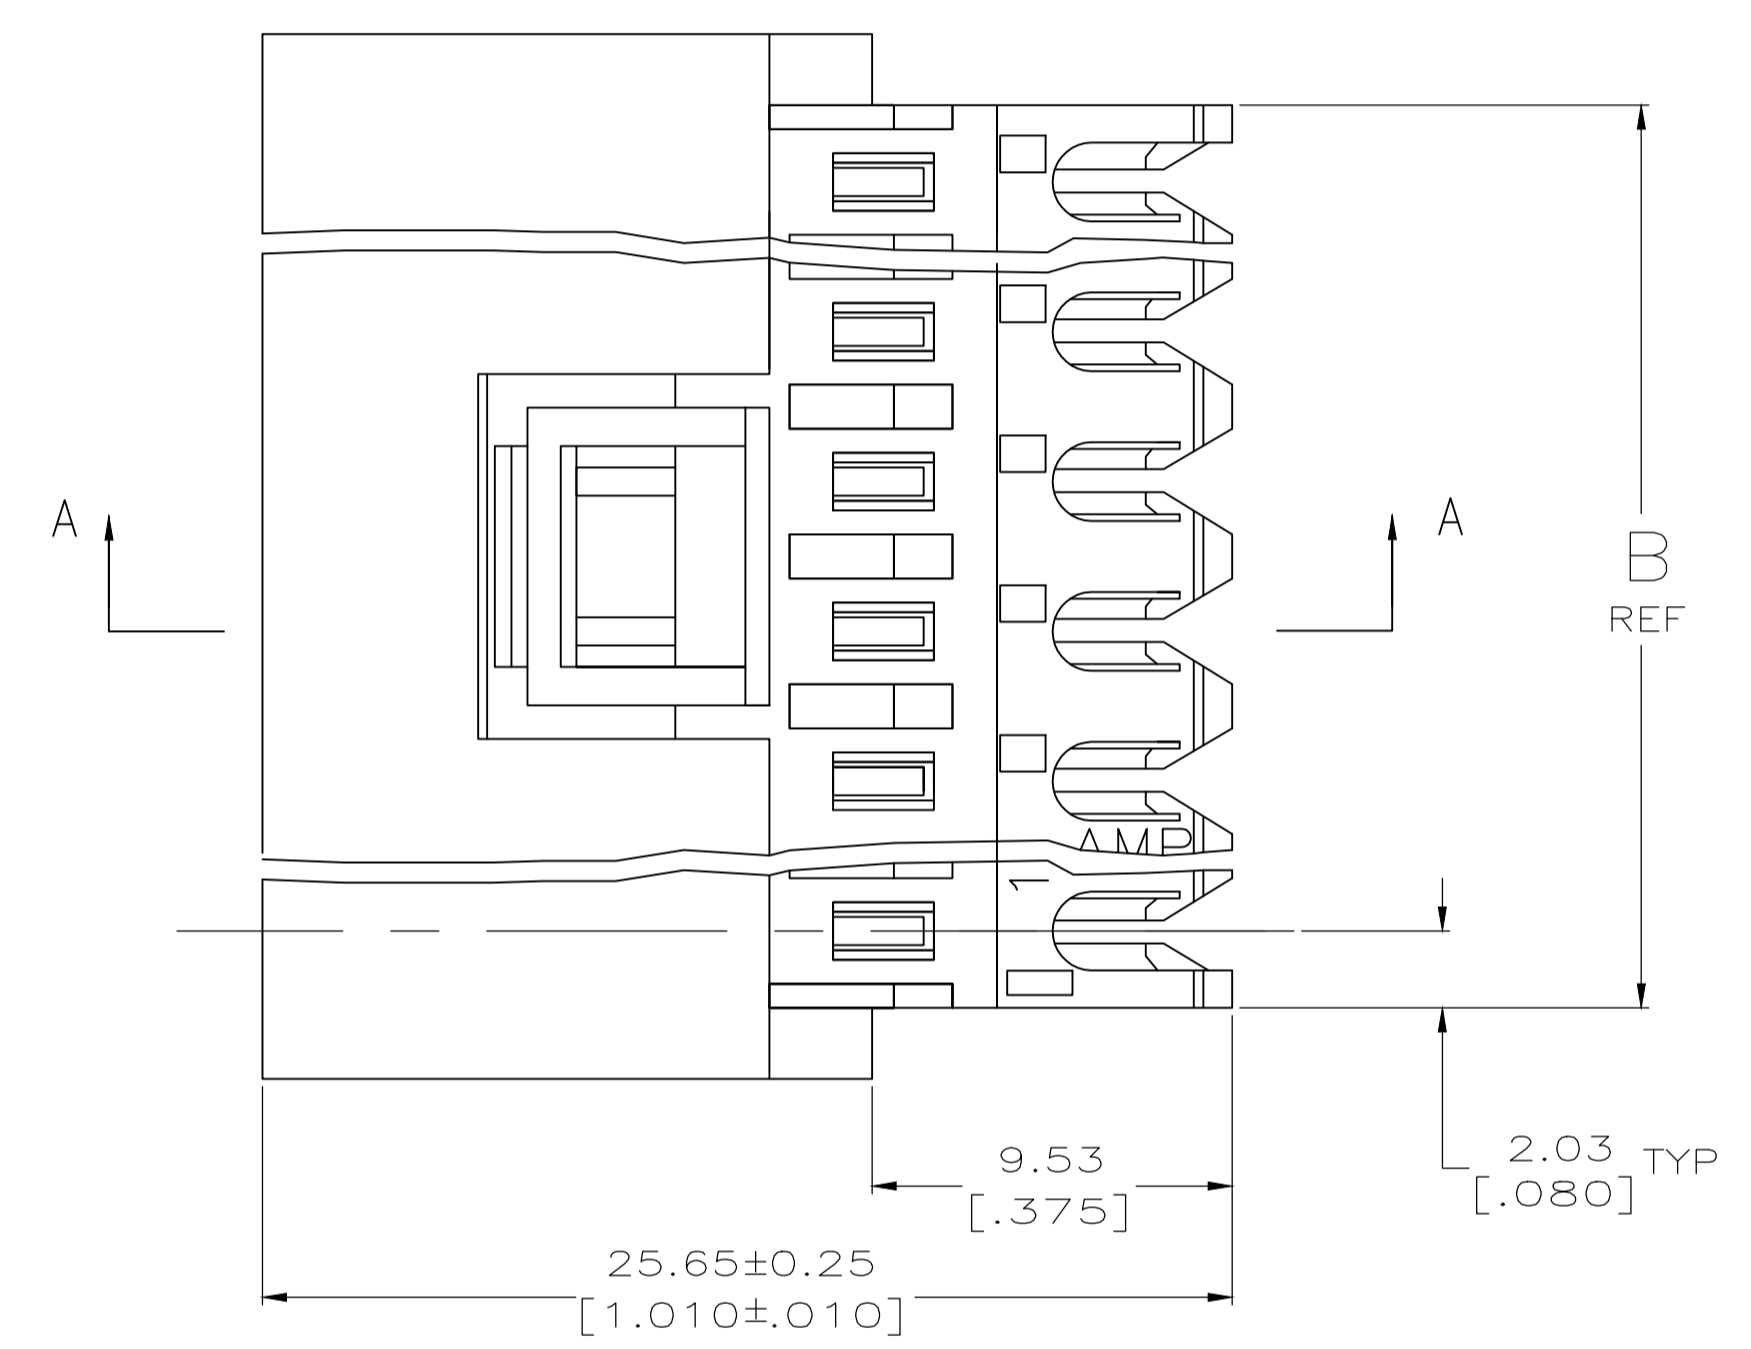


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVD		
E		REVISED PER ECR-20-000808	22MAY2020	PC	SW		

- MATERIAL: CONNECTOR- NYLON UL94V-2 (RED).
CONTACTS - 0.30 [.012] THK COPPER ALLOY
(PLATED 0.00076 [.000030] MIN GOLD OR 0.00008 [.000003] MIN GOLD FLASH OVER 0.00068 [.000027] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ON POST END, WITH BRIGHT TIN-LEAD 0.00203 [.000080] MIN THK ON WIRE END)
OR
CONTACTS - 0.30 [.012] THK COPPER ALLOY
(PLATED 0.00076 [.000030] MIN GOLD OR 0.00008 [.000003] MIN GOLD FLASH OVER 0.00068 [.000027] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ON POST END, WITH MATTE TIN 0.00203 [.000080] MIN THK ON WIRE END)
- CONTACTS ACCEPT #22 AWG SOLID, FUSED STRANDED OR STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX INSULATION DIA.
- BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- HOUSING FEATURES: FEED-THRU.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

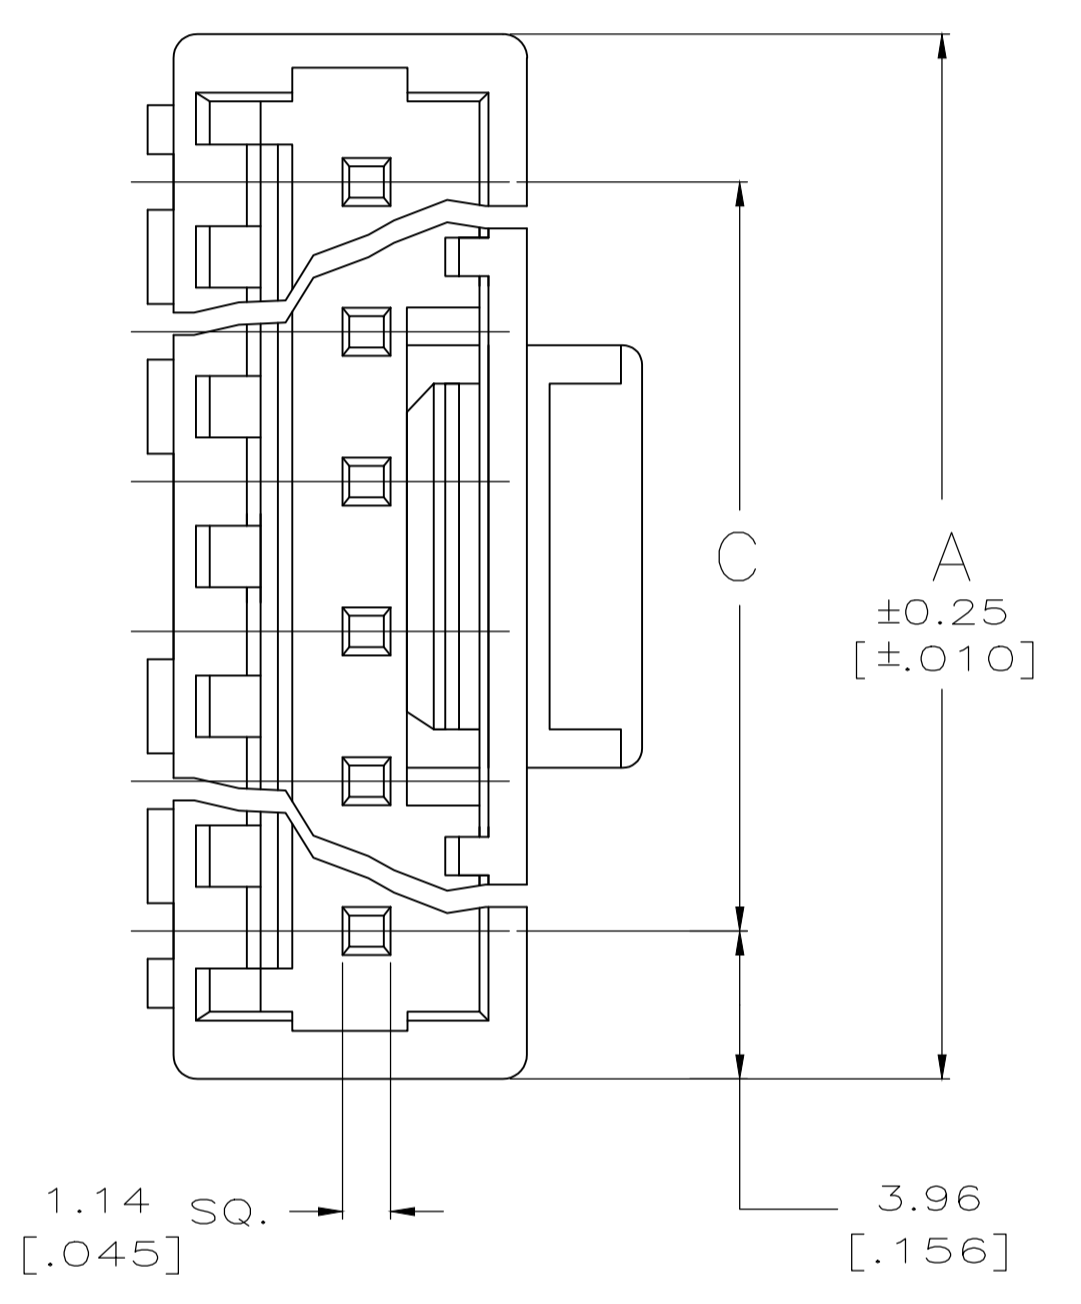

SECTION A-A

NO. OF CIRCUITS	PART NUMBER	FINISH
24	5-644814-4	TIN
15	4-644814-5	
12	4-644814-2	
9	3-644814-9	
6	3-644814-6	
4	3-644814-4	
3	3-644814-3	TIN-LEAD
2	3-644814-2	
24	2-644814-4	
15	1-644814-5	
12	1-644814-2	
9	644814-9	
6	644814-6	TIN
4	644814-4	
3	644814-3	
2	644814-2	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN B. LEWIS 4-12-95	APVD	NAME
0 PLC ± -	1 PLC ± -	4-12-95		
2 PLC ± 0.13 [.005]	3 PLC ± -			
4 PLC ± -	ANGLES ± -			

MATERIAL: SEE NOTE 1. FINISH: SEE NOTE 1. WEIGHT: -. SIZE: A1. CAGE CODE: 00779. DRAWING NO: 644814. CUSTOMER DRAWING. SCALE: 5:1. SHEET: 1 OF 1. REV: E.

STE TE Connectivity
MTA-156 POSTED CONNECTOR ASSEMBLY, 22 AWG