
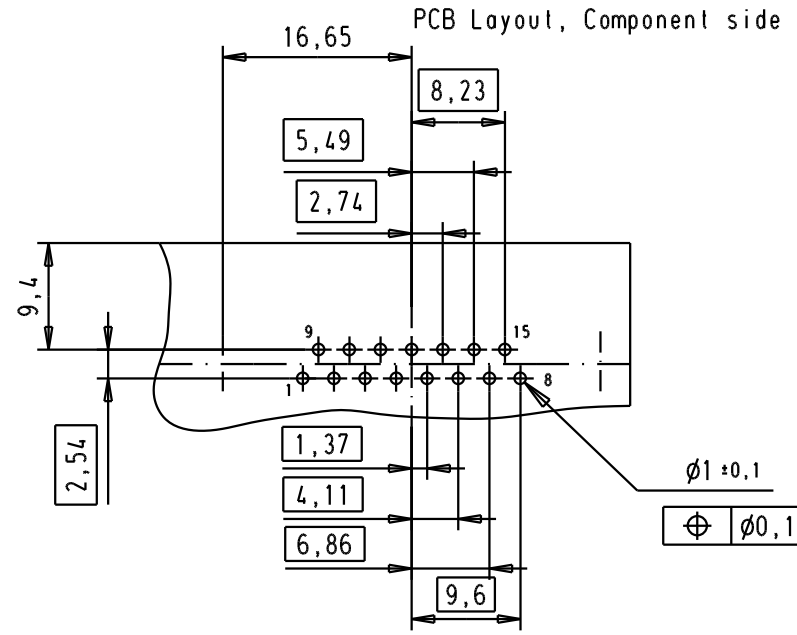
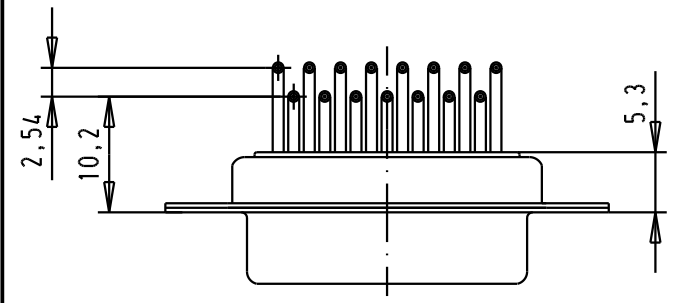
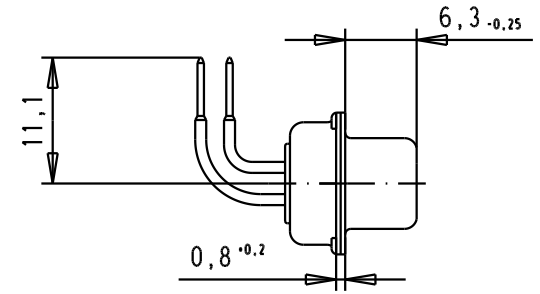


5 4 3 2 1

D
C
B
A

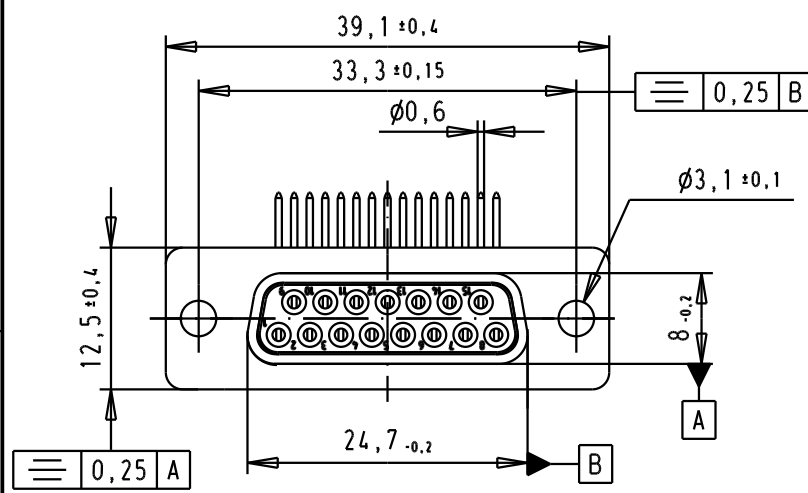

SPECIFICATION

| | |
|-----------------------|-------------|
| Mating Cycles | 500 |
| Filter type | C |
| Capacitance | 1000pf ±20% |
| Working Voltage | 100v |
| Current Rating | 7.5A |
| Insulation Resistance | >1GΩ |

| FREQUENCY (MHz) | ATTENUATION dB |
|-----------------|----------------|
| 5 | 1dB |
| 10 | 3dB |
| 50 | 12dB |
| 100 | 20dB |
| 500 | 34dB |
| 1000 | 30dB |

| | | | | | | | | | |
|-------------------------------|----------|------|---------|----------|----|--|--|-----------------------------|--------------------------------------|
| | | | | | | | Dsub, female, angled, 15 poles, turned solder pins tin plated shell with holes | Mo?MsLab/ Scale 1.5:1 | |
| | | | Detail. | 8-JUL-02 | CV | | | | All Dim. in mm Orig. Size DIN A 4 |
| | | | Insp. | | | | | | |
| | | | Stand. | | | | | | |
| 33262 | 15/11/05 | JMDR | | | | | TB 09642147230 | Blatt/ Page 1 / 1 | |
| 31058 | 8-JUL-02 | CV | | | | | | | |
| Mod. | Dat. | Name | | | | | | | |
| HARTING EURL F-95972 Paris | | | | | | | | | |