ARK1086SCT

Order symbol: ARK1086SCT

Product nbr: 8561505
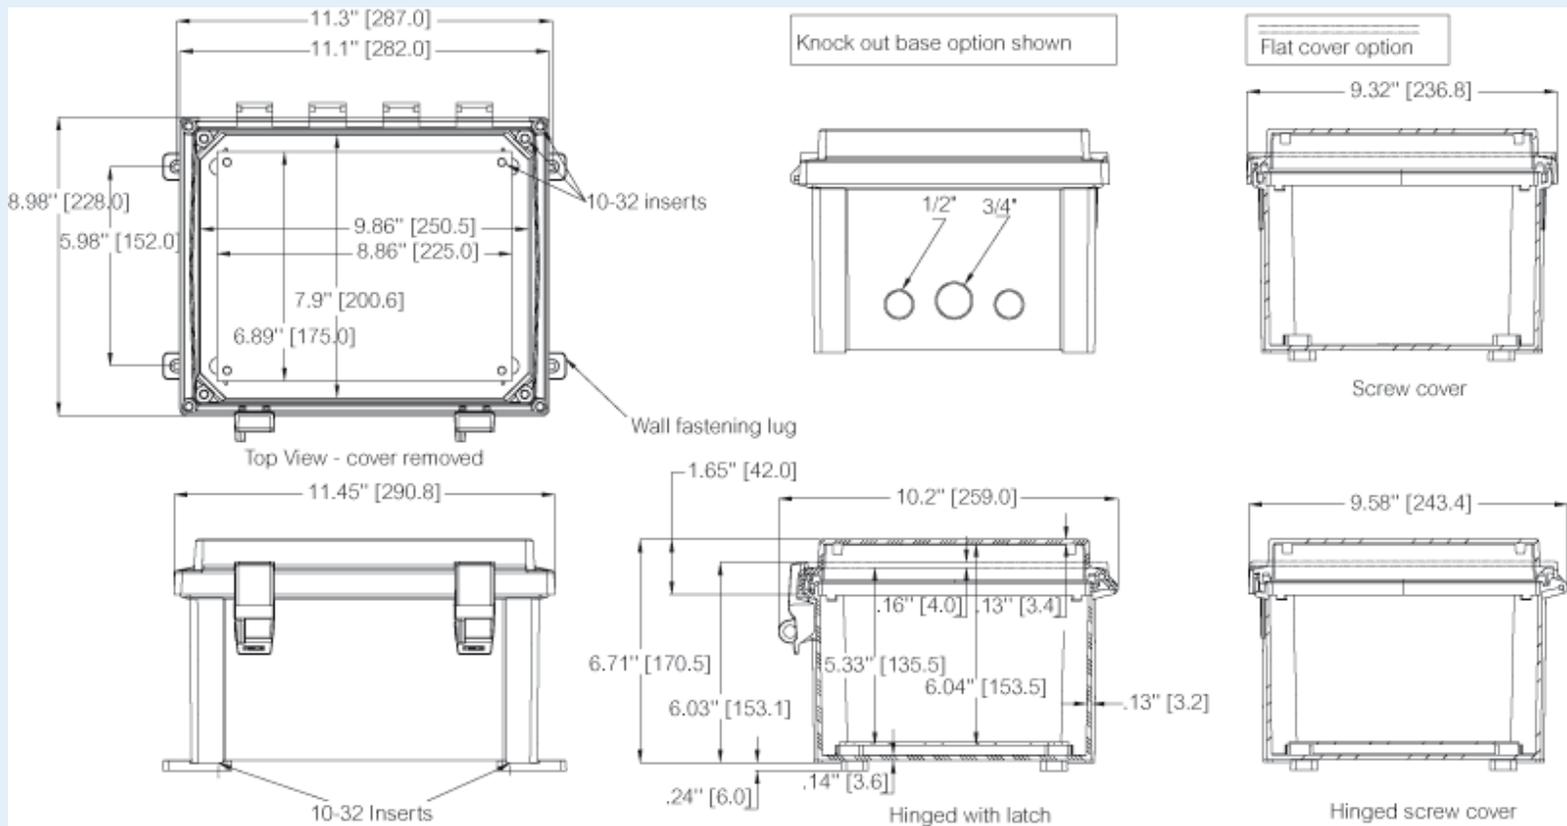
Description: PC Enclosure

Remarks: Transparent screw cover. Base includes 1/2 and 3/4 inch knock-outs.

EAN: 6418074096814

El. number:

- Finland:
- Denmark:
- Sweden:

Including: Screw cover. Base with 10-32 brass inserts, cover with formed in place PUR gasket and 4 stainless cover screws. Base includes 1/2 and 3/4 inch knock-outs. Enclosure mounting foot kit. Accessory 10-32 screws for panel mounting.

Sample image

Top View - cover removed

11.3" [287.0]
11.1" [282.0]
8.98" [228.0]
5.98" [152.0]
9.86" [250.5]
8.86" [225.0]
7.9" [200.6]
6.89" [175.0]
10-32 inserts
Wall fastening lug

Knock out base option shown
1/2" 3/4"

Flat cover option
9.32" [236.8]
Screw cover

11.45" [290.8]
10-32 Inserts

1.65" [42.0]
10.2" [259.0]
6.71" [170.5]
6.03" [153.1]
.24" [6.0]
.16" [4.0] .13" [3.4]
5.33" [135.5]
6.04" [153.5]
.13" [3.2]
.14" [3.6]
Hinged with latch

9.58" [243.4]
Hinged screw cover

Dimensions:	Height	Width	Depth
mm:	254	203	152
inch:	10	8	6

Accessories:	
ASPHK10	Swing Panel Kit w/o Panel
ABP108	Painted Steel Back Panel (226 x 175)

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	Transparent
Gasket material:	Polyurethane

Temperatures:

Temperature °C (short term)::	-40 … 140
Temperature °C (continuous):	-40 … 80
Temperature °F (short term):	-40 … 250
Temperature °F (continuous):	-40 … 175

ADFP108	Dead Front Panel w/ screws (208 x 256 x 0)
ASP108	Aluminum Swing Panel (204.5 x 255 x 0)
ASPK108	Swing Panel Kit incl. Panel
ALBP108	Aluminum Back Panel (226 x 175)
AMFL8	8" Mounting Flange Set
APBP108	PVC Back Panel (226 x 175)

Rating:

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK09;
Electrical insulation:	Not insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 508
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	NEMA 4, 4X, 6, 6P, 12, 12K and 13

Certificates: