

—	G	П	т	0



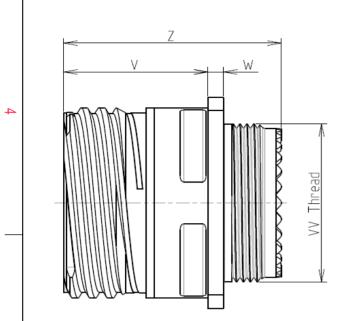

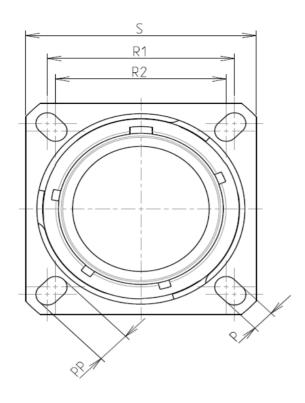

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
2	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	-65°C to +200°C			
	-Salt Spray	: 500 hours			

: 38.69 g ± 10%

8D 0

G

13

S

26

А


F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

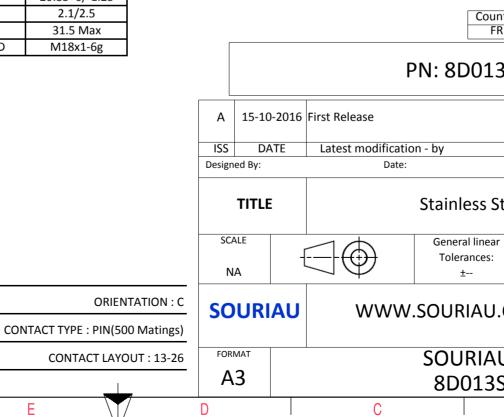

	Φ		A		
					4
AS EXA	AMPLE				3
s whic er of t ndatio untry FR	non-conformit h does not co he Parties or b n, technical n Jurisd	mply with by a third par	ty		2
	1			MOD N°	
Stee	teel Receptacle 8D series				
:	859				
This document is the property of					1
	.COM SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
S20	6AC-C			1/2	
	В		А		-

-	т	۵	г	m		O
		Contact Layout				Panel Cutou
4		26			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	[2#12 6#22D 13-26]		₩	
ω	Ctc A B C D E F 1 2	X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 -4.34 3.25 0 -3.25 0				Dim ØA ØA R1 ØT
	_	3.23]			
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
N						Country FR
						PN: 8D0135
					ISS DATE	
					Designed By:	Date: Stainless Ste
<u> </u>					SCALE	General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D013S2
L	Н	G	F	E	D	C

