

VSSC

VSSC4 GDT 240VAC/DC20kA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com



Surge protection with individual components
 With gas-discharge tubes in terminal design
 Gas-discharge tubes / sparkover gaps (GDT) are designed with a terminal shape. They are approved for a maximum DC voltage, which is printed on the component. Any voltage greater than the amount specified is safely discharged within about 10-100µs. Gas arresters can be used for high-power applications.

General ordering data

Type	VSSC4 GDT 240VAC/DC20kA
Order No.	1064060000
Version	Surge protection for instrumentation and control, 240 V, 339 V, 20 A, IEC 61643-21
GTIN (EAN)	4032248829477
Qty.	5 pc(s).

VSSC VSSC4 GDT 240VAC/DC20kA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Width	12.2 mm	Width (inches)	0.48 inch
Height	76 mm	Height (inches)	2.992 inch
Depth	58.5 mm	Depth (inches)	2.303 inch
Net weight	37.4 g		

Temperatures

Humidity	5...96 %	Operating temperature, max.	70 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	80 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...70 °C
Storage temperature	-40 °C...80 °C		

Probability of failure

λ_{ges}	10	MTTF	11,416 Jahre
PFH in $1 \cdot 10^{-9}$ per hour	0	SFF	100 %
SIL in compliance with IEC 61508	3		

CSA protection data

Gas group C	IIB	Gas group D	IIA
Gas groups A, B	IIC	Input current, max. I_I	20 A
Input voltage, max. U_i	407 V	Internal capacity, max. C_i	0 nF
Internal inductance, max. L_i	0 μ H		

General data

Colour	Black	Design	Terminal
Isolating function	No	Mounting rail	TS 35
Optical function display	No	Protection degree	IP20
Segment	Instrumentation and Control	UL 94 flammability rating	V-0

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Capacitance	4.65 pF	Discharge current I_{max} (8/20 μ s) wire-PE	20 kA
Discharge current I_n (8/20 μ s) wire-PE	5 kA	Discharge current, max. (8/20 μ s)	20 kA
Lightning test current I_{imp} (10/350 μ s)	2.5 kA	Lightning test current, I_{imp} (10/350 μ s)	
Max. continuous voltage, U_c (AC)	288 V	Wire-PE	2.5 kA
Overload - failure mode	Modus 2	Max. continuous voltage, U_c (DC)	407 V
Rated current I_N	20 A	Protection level U_p (typ.)	\leq 1200 V
Rated voltage (DC)	339 V	Rated voltage (AC)	240 V
Standards	IEC 61643-21	Requirements category acc. to IEC 61643-21	C2, C3, D1
Surge current-carrying capacity C3	100 A 10/1000 μ s	Surge current-carrying capacity C2	5 kA 8/20 μ s
Voltage type	AC/DC	Surge current-carrying capacity D1	2.5 kA 10/350 μ s
		Volume resistance	$<$ 0.1 Ω

VSSC VSSC4 GDT 240VAC/DC20kA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Further details of approvals

GOST certificate GOST-Zertifikat

Connection data

Type of connection	Screw connection, Torx® T15, Slotted 0.8 x 4	Tightening torque, min.	0.5 Nm
Tightening torque, max.	0.8 Nm	Clamping range, min.	0.5 mm ²
Clamping range, max.	4 mm ²	Wire cross-section, solid, min.	0.5 mm ²
Wire cross-section, solid, max.	6 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	4 mm ²	Connection cross-section, stranded, min.	0.5 mm ²
Connection cross-section, stranded, max.	4 mm ²		

Rated data UL

UL certificate UL Zertifikat

Ratings IECEx/ATEX/cUL

cUL certificate cUL Certificate

Classifications

ETIM 3.0	EC000943	ETIM 4.0	EC000381
ETIM 5.0	EC000943	ETIM 6.0	EC000943
UNSPSC	30-21-18-11	eClass 5.1	27-14-11-27
eClass 6.2	27-13-08-02	eClass 7.1	27-13-08-09
eClass 8.1	27-13-08-11	eClass 9.0	27-13-08-11
eClass 9.1	27-13-08-07		

Product information

Descriptive text ordering data End plate AP VSSC4 1063120000

Descriptive text accessories Screwdrivers: Torx® 9009170000 Slot 0.8x4.0 9008340000 EMC Set: 1067470000 Marker: WS10/6 1818400000; DEK 6 0468560000; DEK 5 1768260000; SNAPMARK 1805880000

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	SIL Paper CE PAPER
Brochure/Catalogue	CAT 4.4 ELECTR 16/17 EN
Engineering Data	EPLAN_WSCAD
Engineering Data	STEP
User Documentation	Instruction sheet VSSC

Creation date April 19, 2018 11:22:41 PM CEST

Catalogue status 06.04.2018 / We reserve the right to make technical changes.

Data sheet


VSSC
VSSC4 GDT 240VAC/DC20kA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings



Similar to illustration

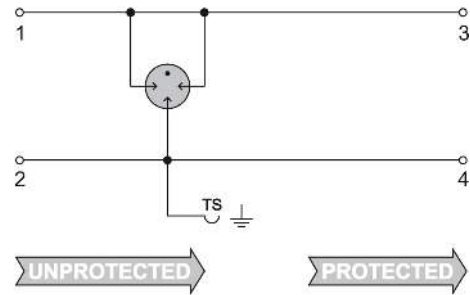

Circuit diagram