

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		G1	REDRAWN PER ECO-12-019442	06NOV12	KH	DR

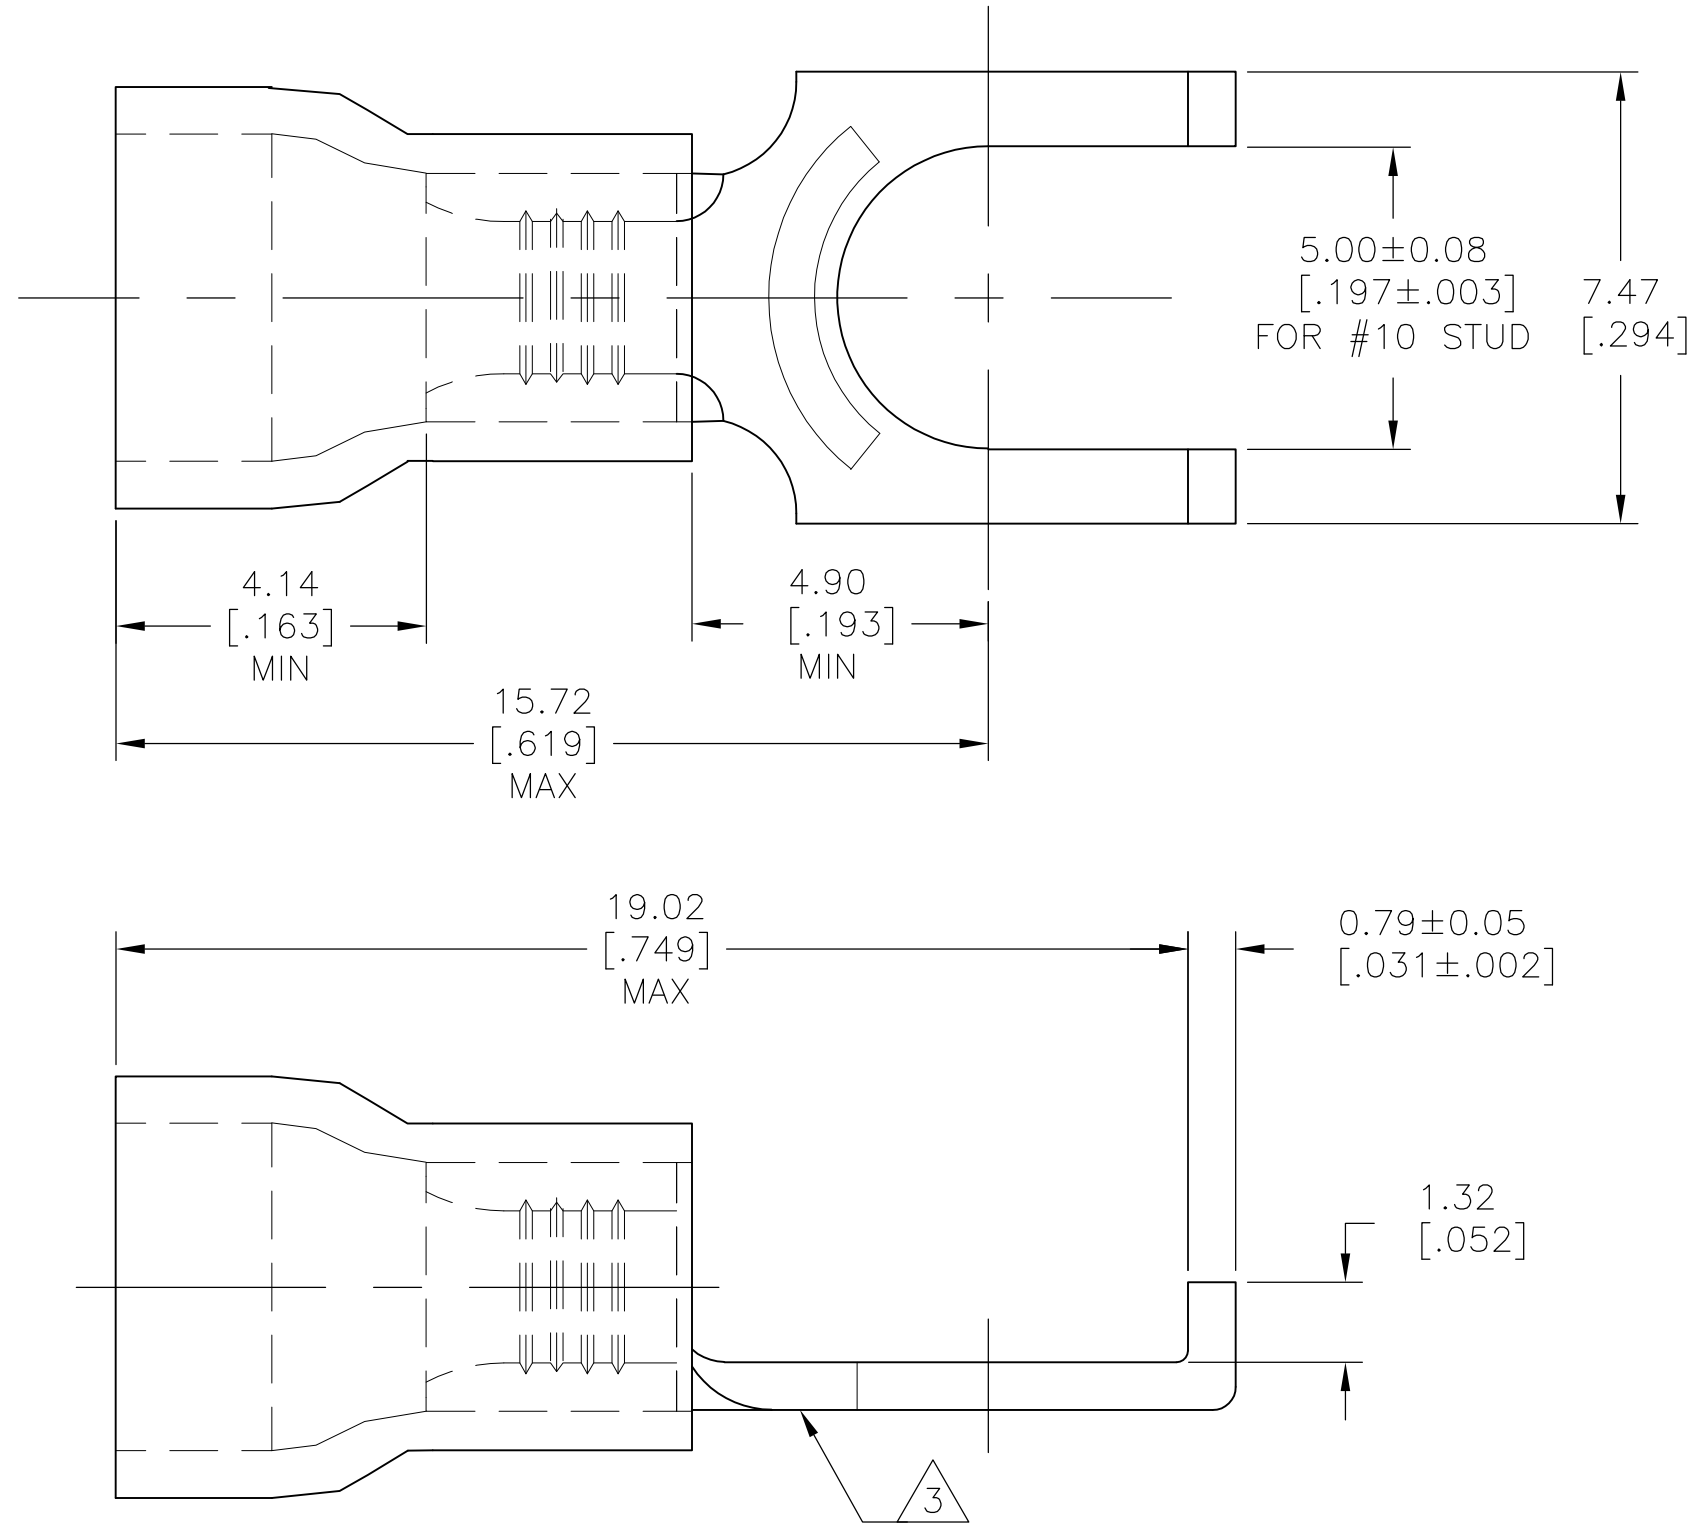

- 1 MATERIAL: COPPER PER ASTM B152
INSULATION: PVC
- 2 FINISH: TIN PLATED PER ASTM B545
INSULATION: COLOR: BLUE
- 3 STAMP AMP 16-14* APPROX AS SHOWN
- 4 WIRE INSULATION DIAMETER
4.95[.195] MAX

160213
PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 343°C [649°F]
VOLTAGE RATING: N/A
CIRCULAR MILL AREA: 1.04-2.62mm ² [2,050-5,180] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± 0.20[.008]
	4 PLC ± -
	ANGLES ± -
MATERIAL 1	FINISH 2

DWN KIRAN HOLAL	06NOV12
CHK ROHDE DANIEL	06NOV12
APVD ROHDE DANIEL	06NOV12
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	-

TE Connectivity			
NAME TERMINAL PLASTI GRIP RECTANGULAR TONGUE(SLOTTED), WIRE SIZE 16-14			
SIZE A3	CAGE CODE 00779	DRAWING NO C-160213	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 8:1	SHEET 1 OF 1
		REV G1	