


SHIELD CONDUCTOR CONTACT

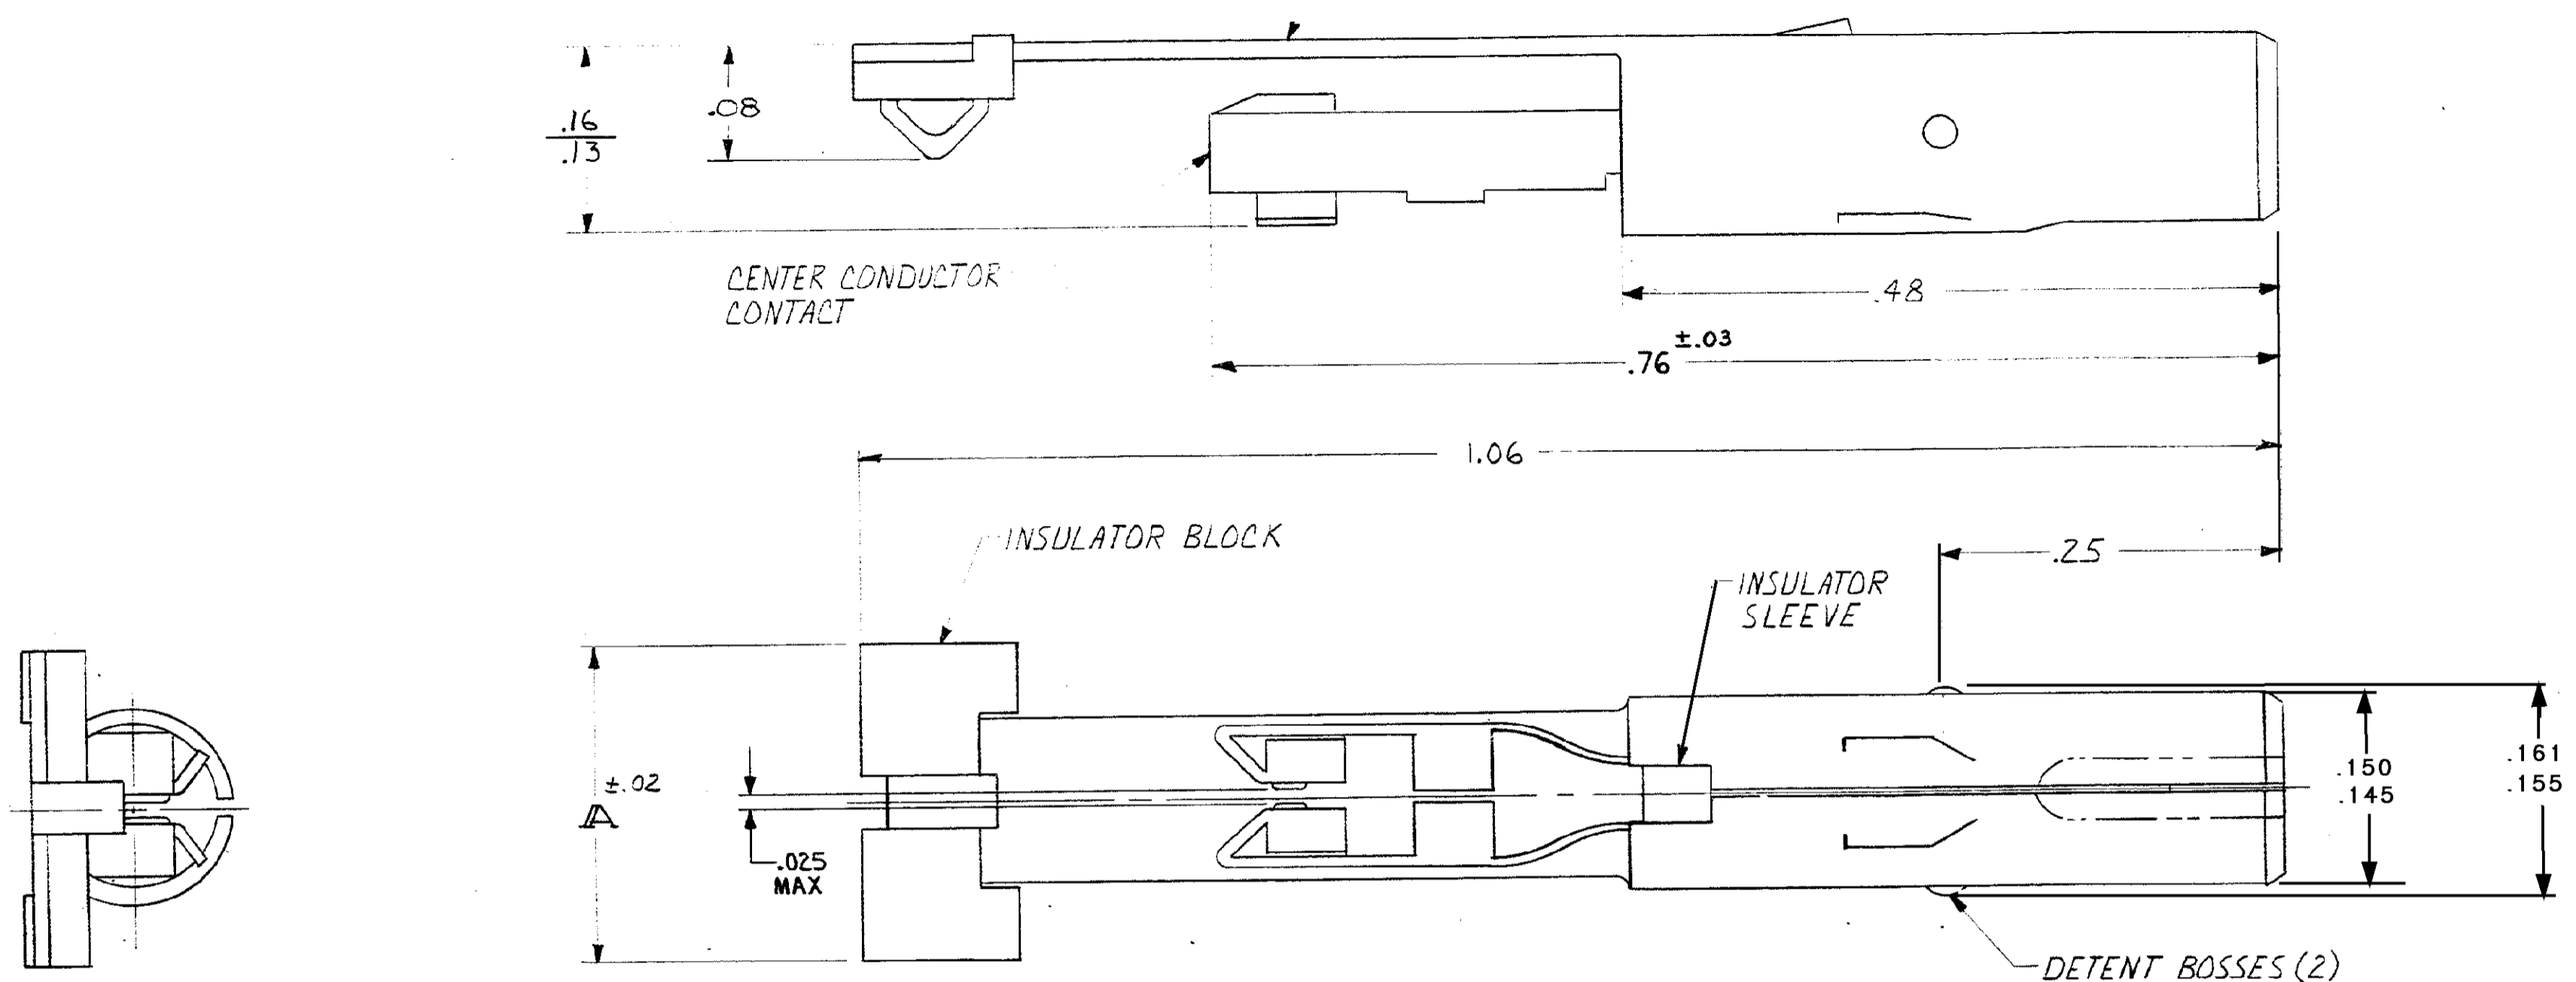

- 1. INSULATOR BLOCK IS ABS PER MIL-M-22544. INSULATOR SLEEVE IS POLYCARBONATE PER MIL. SPEC. I-P-393.
- 2. CENTER CONDUCTOR CONTACT IS PER AMP P/N 422353-2.
- 3. SHIELD CONDUCTOR CONTACT IS BERYLLIUM COPPER, PLATED WITH .000030 GOLD OVER .000050 NICKEL.
- 4. THIS ASSEMBLY MATES WITH RECEPTACLES IN AMP P/N 425475-3.

1-422972-3	.200	GRAY	MICD
1-422972-1	.240	BLACK	COAXIAL
PART NO.	A	INSULATOR BLOCK COLOR	SYSTEM TYPE

DWG SIZE	NUMBER	NAME	REMARKS	ITEM NO.
REQUIRED PER ASSEMBLY				
MATERIAL		HEAT TREAT		COATING OR PLATING
WIRE RANGE		UNLESS OTHERWISE SPECIFIED REMOVE BURRS, BREAK SHARP EDGES .015 R MAX DECIMALS: .00 ± .02, .000 ± .005, .0000 ± .0005 ANGLES: ±0° 30'		
CLASS		TYPE REMOVABLE CONTACT		AMP INCORPORATED HARRISBURG, PENNA.
DATE		FIRST USED		LOC S C
BY		P.P.P.		NO. 422972
CHKD		SCALE NAME		REV F
APP'D		10:1 REAR RECEPTACLE SUB-ASSY		

REV	DATE	DESCRIPTION
F	ECO-08-014134	PY DE 10-08
E	REVISED	ECN S3146
D	76 3-23-71	76 3-23-71
C	76 3-23-71	76 3-23-71
B	76 3-23-71	76 3-23-71
A	76 3-23-71	76 3-23-71

CUSTOMER DRAWING!

AMP 1256 REV 9/66 8 7 6 5 4 3 2 1 H G F E D C B A