

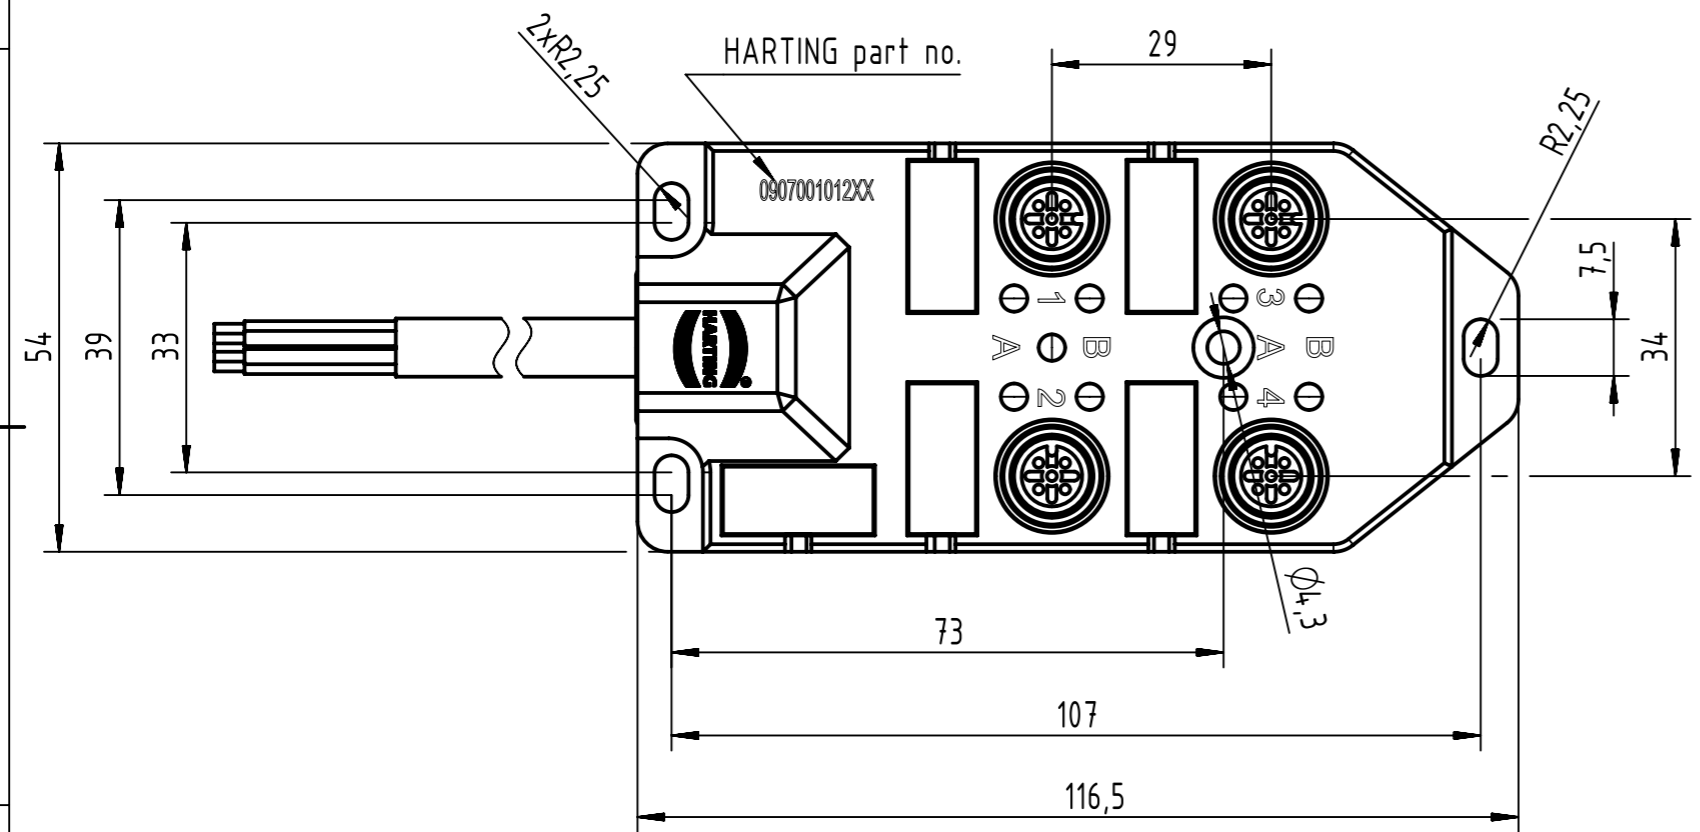
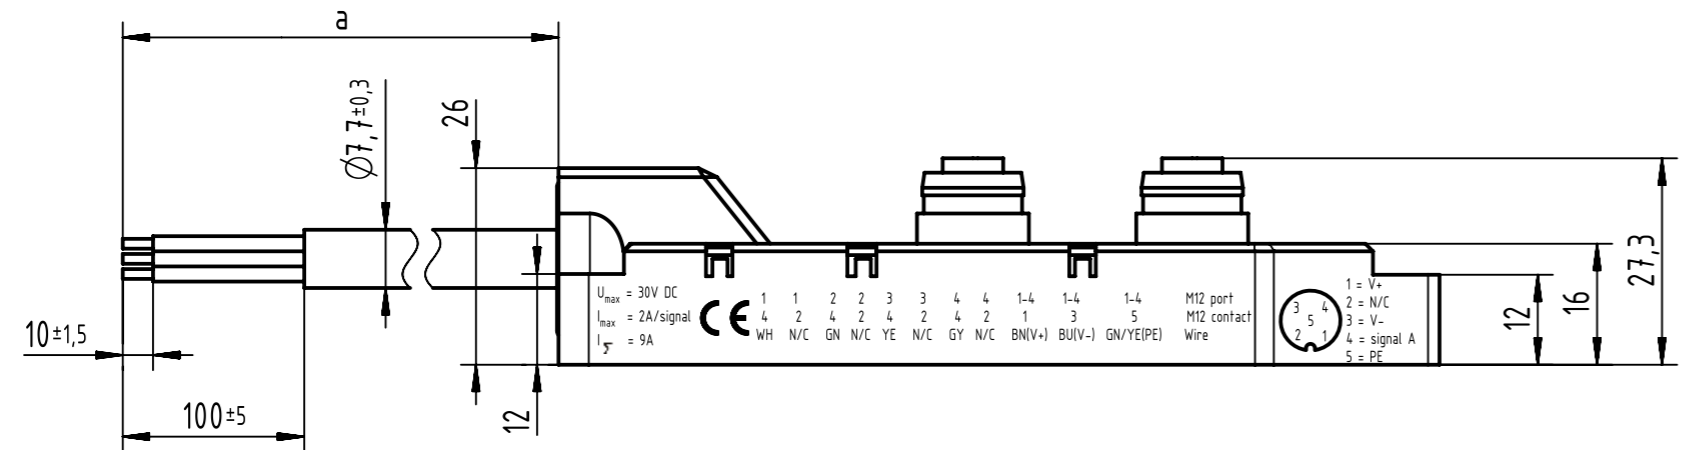


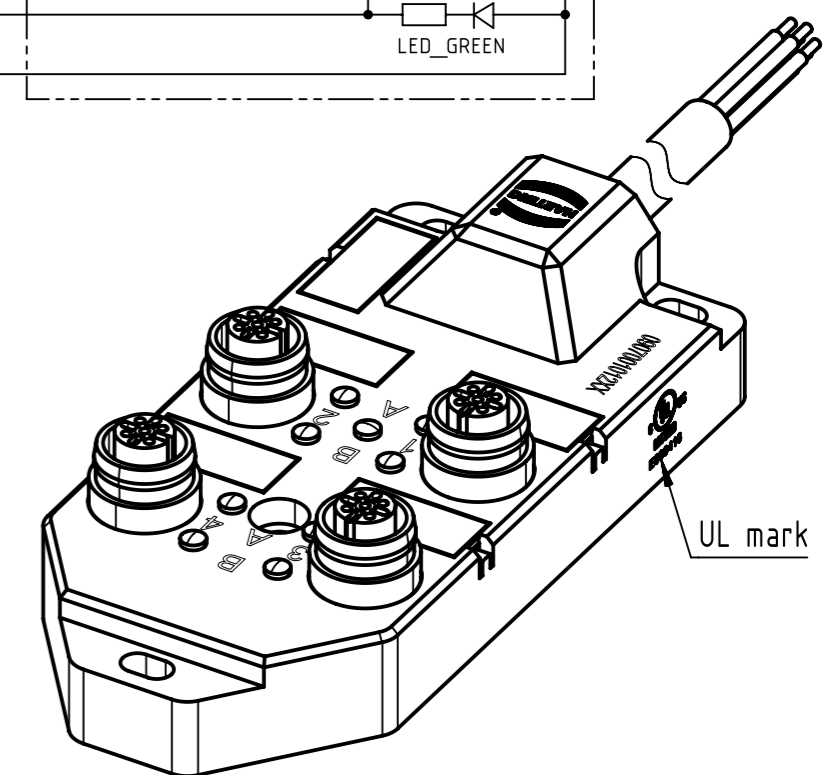

Loading plan

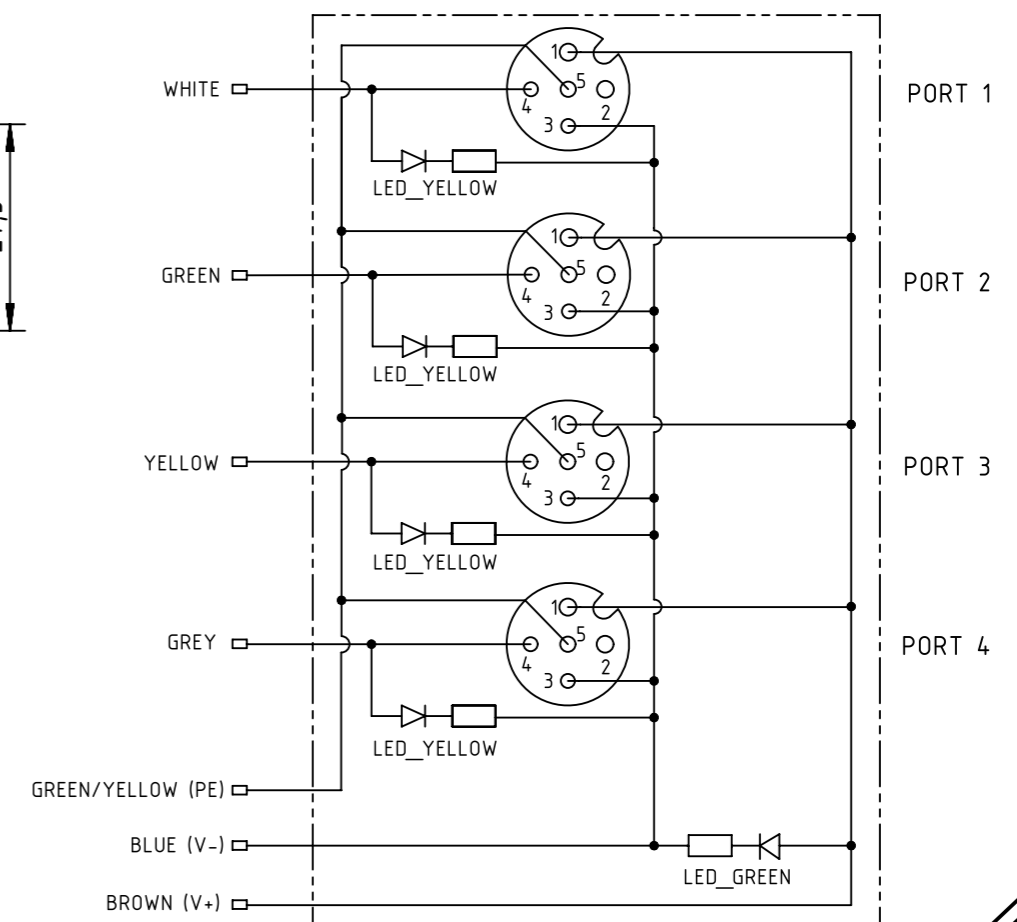

- Protection level: IP67
 - Temperature range: -10°C ... +70°C

6	090700101250	PVC, 3x0.75mm ² + 4x0.34mm ² , black	10
5	090700101251		5
4	090700101253		2
3	090700101200	PUR, 3x0.75mm ² + 4x0.34mm ² , black	10
2	090700101201		5
1	090700101203		2
Cont. no	HARTING part no.	Type of cable	Dim. a[m]

All rights reserved Department HCS - RO HARTING Customised Solutions D-32339 Espelkamp	All Dimensions in mm Tech. Character. Free size tol. According to production drawing	Created by COSTEA Costea Inspected by 402676 Gross Standardisation MUNTEANV Muntean Date 2020-04-14 State Final Release	Doc-Key / ECM-Nr. 100831534/UGD/000/C 500000171204 Rev. C Page 1/1
	Title har-SAB M12/4/4p Type TB Number 0907001012XX		