


Ŧ	۵	н п	m	0

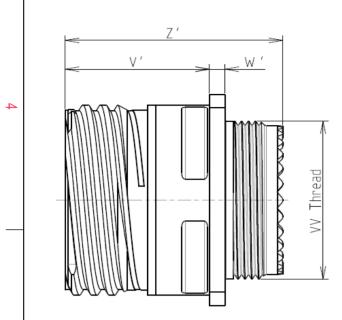

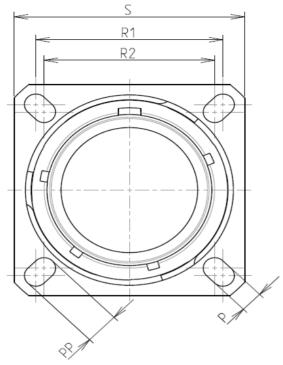



Keying Shown as example

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	_∶ -65°C to +175°C
-Salt Spray	: 2000 hours
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souriau -Temperature Range

: 14.4 g ± 10%

8D 0

G

13

-

J

26

F

P N

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	23.01				
R2	20.62				
S	28.6±0.3				
V'	19.5+1.4/-0				
W'	2.1/3.65				
Ζ'	32 Max				
VV THREAD	M18x1-6g				

T.								
т				0		ω	Þ	
					YOUT SHOWN AS EXA	MPLE		
nector dimension Nominal 3.25±0.2 4.93±0.2 23.01 20.62 28.6±0.3 19.5+1.4/-0 2.1/3.65 32 Max				due to a use the Specifications	not be liable for any r of the Products whic s issued by either of t onal recommendatio Country	h does not compl he Parties or by a n, technical notice Jurisdictic	y with third party e.) on & Control List	
32 Max AD M18x1-6g	_		FR Not Listed PN: 8D013J26PN					
		A ISS Designe	DATE	First Release Latest modificatio Date:	on - by	C	USTOMER DRAWING	MOD N°
					Composite Receptacle		NPRDS / PROJECT	
ORIENTATION : N			± 859 \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		859 This document is the prop SOURIAU			
CONTACT TYPE : PIN(500 Matings)			OURIAU WWW.SOURIAU.COM			it must not be reproduc communicated without pe		
	1	A			8D013J26	5PN-C		1/2
E	/	D		С		В	A	

	Ŧ	Q	н г	m		0	
		Contact Layout				Ра	nel Cutou
		26				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
						R1	
4					1		
		o ^E o ^B o			2		
		2#12					
		6#22D 13-26]		<u>*</u>		
	Ctc	X Y				ØA_	<u>T</u>
	AB	0 3.47 2.47 4.34					
	С	2.47 -4.34				Dim ØA	
ယ	D	0 -3.47 -2.47 -4.34				ØAA R1	
	F	-2.47 4.34				ØT	
	1	3.25 0 -3.25 0					
	2	5.25]				
						SOURIAU shall not be liab due to a use of the Pro	
						the Specifications issued by (professional recor	y either of
							Country
N							FR
						PN: 80	D013J
					A 14-10-20	016 First Release	
_					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Corr	nposite
					SCALE		al linear
<u> </u>					NA		rances: ±
					SOURIA	U WWW.SOUR	RIAU.C
					FORMAT	SOU	RIAU
					A3		013J2
	Н	G	F	E	D	C	

