


SPECIFICATIONS:



(top view) (bottom view)


Industry Standard Dimensions

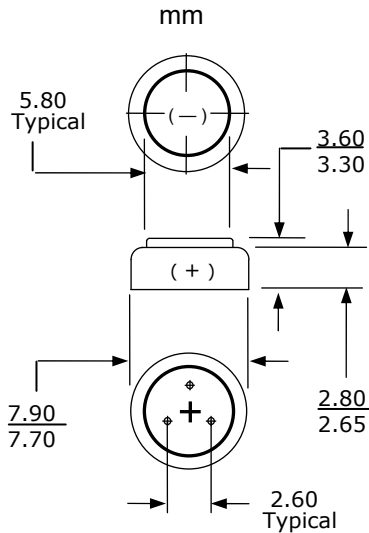


Chemical System:	Zinc Air (Zn/O ₂)
Identification:	IEC-PR41
Tab Color:	Brown
Build Standard:	IEC 60086-1:2015, IEC 60086-2:2015
Nominal Voltage:	1.45 Volts
Capacity:	At 20±2 °C 55±10%RH
hearing aid standard	74 h (148 mAh) (Rated at 2 mA continuous & 10 mA / 100 ms Pulses to 1.05 volts)
hearing aid high drain	53 h (146 mAh) (Rated at 2 mA continuous & 5 mA / 15 min Pulses to 1.1 volts)
Capacity Retention:	> 85%(after 3 years)
Available Current:	10 mA(at 1.1 volts)
Tab Sealing Arrangements:	On Cathode Can. See picture above.
Shelf Life:	3 years
Operation Temp:	0°C to 50°C
Typical Weight:	0.49 grams (0.02 oz.)
Typical Volume:	0.17 cubic centimeters (0.010 cubic inch)
Impedance:	≤ 6 ohms (at AC 1000Hz)

Discharge Charts of IEC 60086-2:2015 Standards


Hearing aid standard

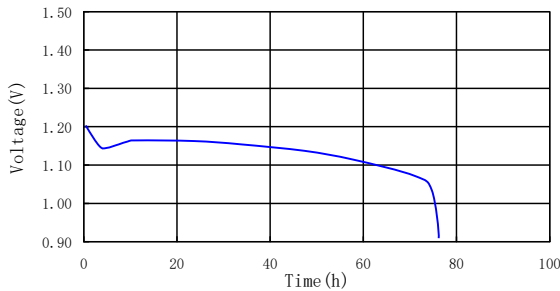

Wireless streaming

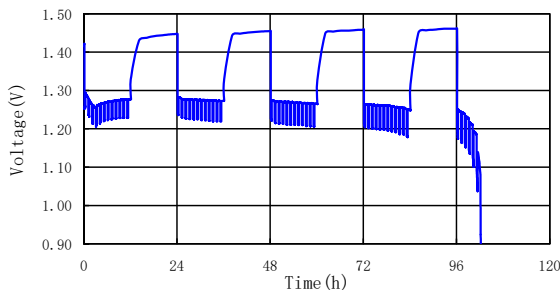

Construction

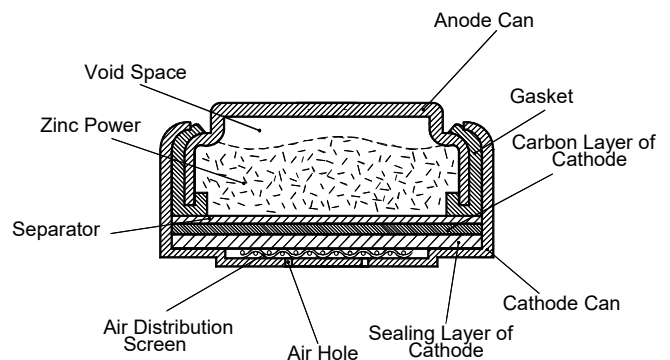

Microbattery Co.

7350 NW 35 Terrace, Miami, FL 33122

Tel: 305 371 9200 Fax: 305 371 9300

info@microbattery.com

www.microbattery.com

This data sheet is subject to change without prior notice. Contact us for the latest information. Contents here do not constitute a warranty.