


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	06/13/00	T.S.

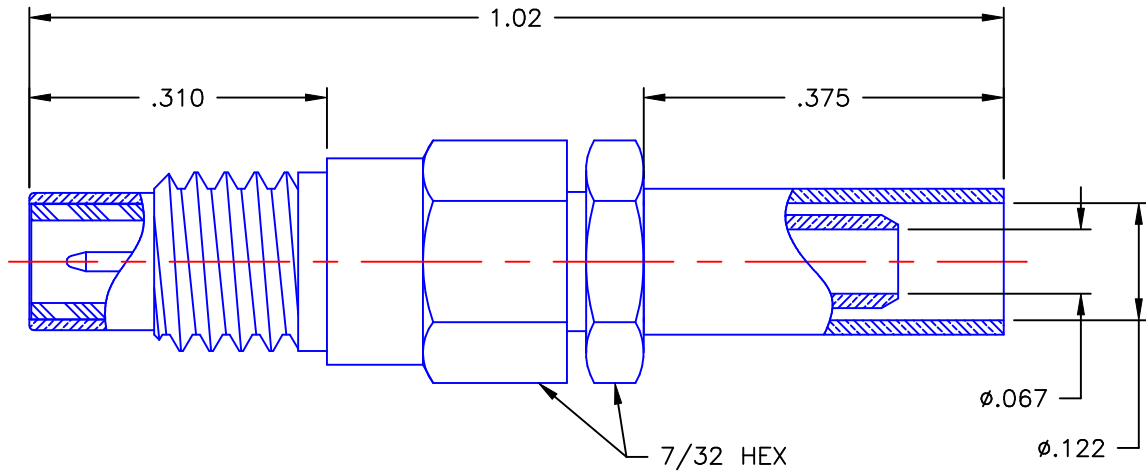


NOTES:

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I CLASS "B".
2. CRIMP SLEEVE = SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL O50 EXCEPT YIELD STRENGTH.
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES

1. CONTACTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.
	T.S.	06/13/00	
DECIMAL	ANGLE	CHKD:	SMC STRIAIGHT MALE JACK CRIMP TYPE FOR RG-316 & SIMILAR CABLES
		D.N.	
		APVD:	DWG NO. 1001-1571-003 REV -
		D.J.C.	
REFERENCE:	MATERIAL & FINISHES:	SIZE	FSCM NO.
ORIGINATOR: T.S. DATE: 06/13/00	SEE NOTES	A	19505
		SCALE 5:1	THIRD ANGLE PROJECTION
			SHEET 1 OF 1

1001-1571-003