


Unit : mm

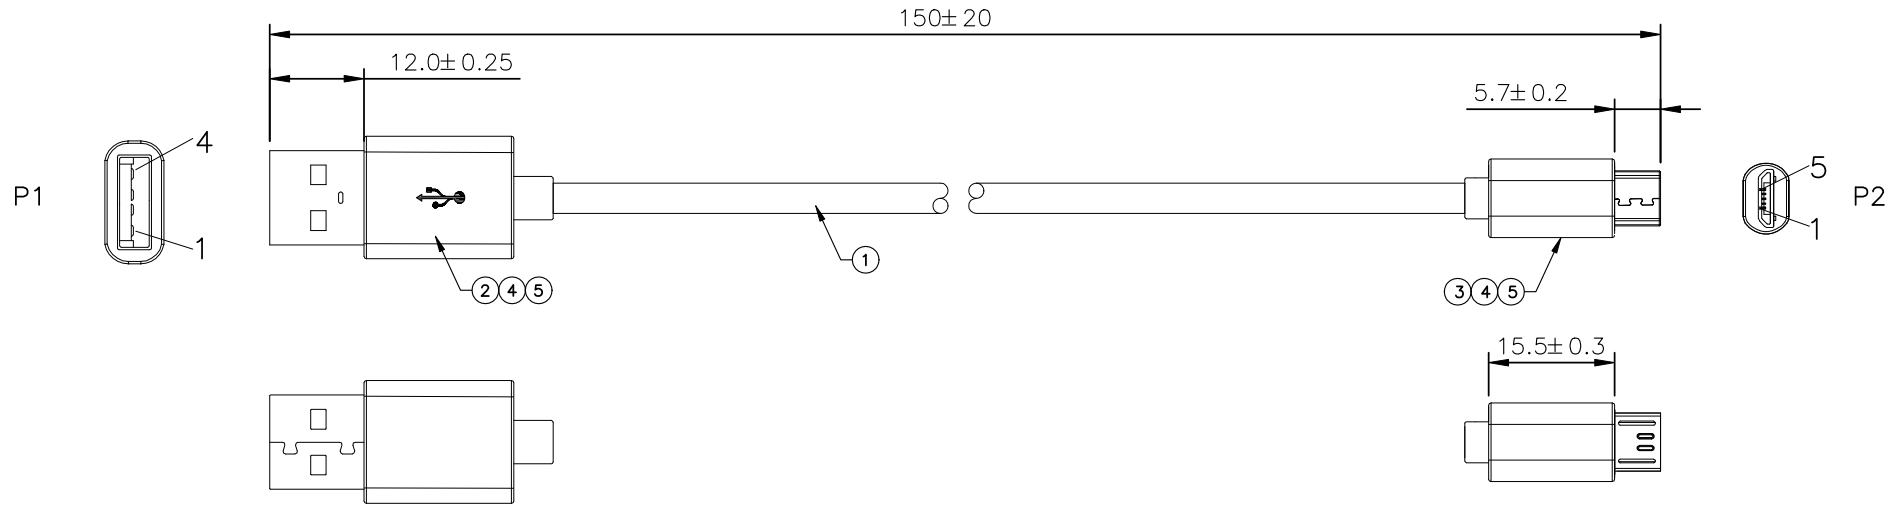

Electrical characteristics requirements:

- 1) Product must be 100% conduction, open circuit, short circuit test
- 2) conductive resistance: 2Ω MAX
- 3) Insulation resistance: 10MΩ MIN DC 300V/0.01S
- 4) There is no scratch, crush, foreign body and other defects in the appearance
- 5) Products conform to the latest ROHS standard

RoHS Compliant

PIN ASSIGNMENT			MATERIAL SPECIFICATION					REVISIONS	
SYM	NAME	DATE	ITEM	PART No.	VENDOR	DESCRIPTION	Q'TY	OVERALL WIRE LENGTH	
1	RED	1	5	OVERMOLD	-	PVC BLACK 45P 非阻燃 ROHS+REACH	-	-	
2	WHITE	2	4	INNERMOLD	-	PP 透明 ROHS+REACH	-	-	
3	GREEN	3	3	CONN	-	USB2.0 MICRO USB BLACK G/F 铁壳镀镍 ROHS+REACH	1	-	
4	BLACK	5	2		-	USB2.0 A/M 一体式 BLACK胶芯 G/F 铁壳镀镍 ROHS+REACH	1	-	
SHELL	DRAIN	SHELL	1	CABLE	-	NO-UL,#30*1P+#26*2C+A+E BLACK PVC OD:3.5MM VW-1 ROHS+REACH	1	150	
P1	COLOR	P2							
△3			DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCRIPTION		
△2			Lulu	Iron	Iron	Waleed	USB CABLE		
△1			06/19.20'	06/19.20'	06/19.20'	06/19.20'	瀚荃股份有限公司 CviLux Corporation		
REVISIONS			CUST. CODE		DRAWING No.		CviLux P/N		
			CUC		DH50565A		DH-20M50057		
			CUSTOMER P/N		SHEET: 1 OF 1		-		