
## PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
01	PRELIMINARY	02/22		
02	PRELIMINARY	04/22	SEE PDM	

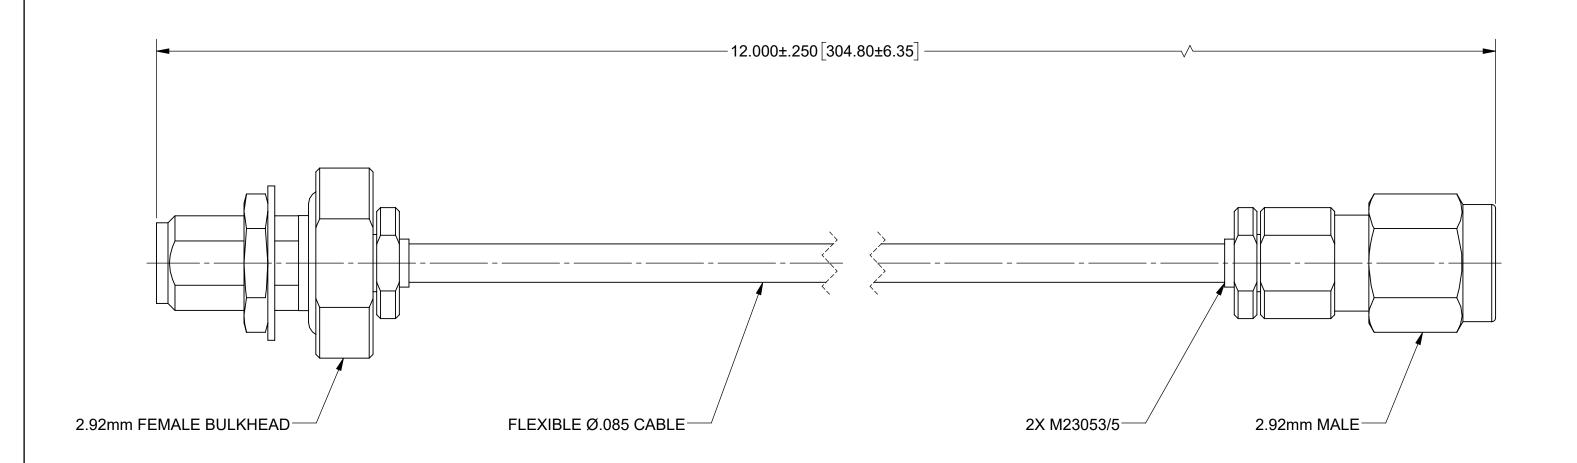

## **MATERIAL:**

2.92mm FEMALE BULKHEAD (SF1521-60025) CONNECTORS:

2.92mm MALE (SF1511-60071)

FLEXIBLE Ø.085 CABLE (200-70-139) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 40.0 GHz

DIMENSIONS ARE IN IN	ICHES TOLERANCES:
FRACTIONAL: ±1/64	ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010	

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION	DRAWN:	SJ 02/25/22
	CHECKED:	SEE PDM
	APPROVED:	SEE PDM

## MICROWAVE UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES. 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63. MIL-STD-10. 6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R. 7) REMOVE ALL BURRS

2.92mm FEMALE BULKHEAD TO 2.92mm MALE 12" Ø.085 CABLE ASSEMBLY

SIZE <b>B</b>	DWG. NO.	7015-	015-1099	
SCALE: 4:1			SHEET 1 OF 1	