Alle Rechte vorbehalten/ *All rights reserved*

Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802

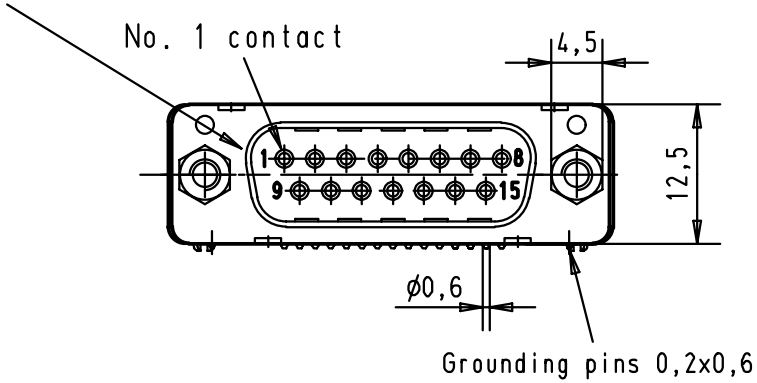

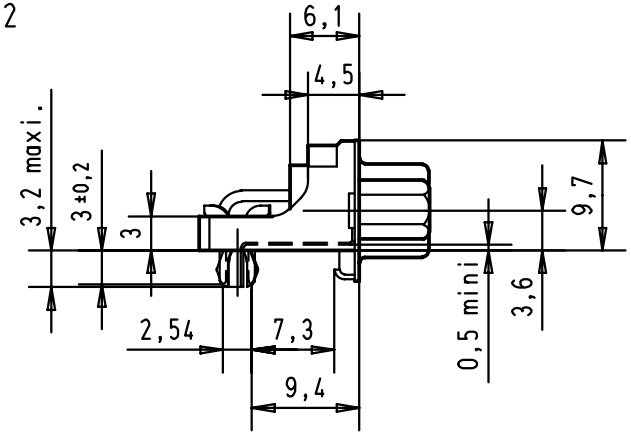

Printed board layout(1,6±0,2 thick)
View component side
(PCB plating = Tin)

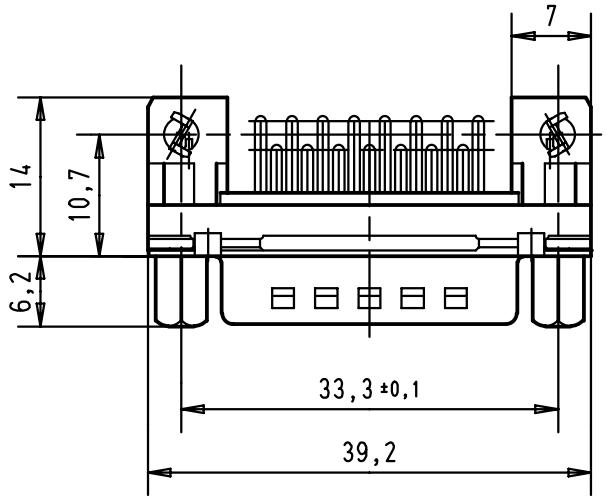

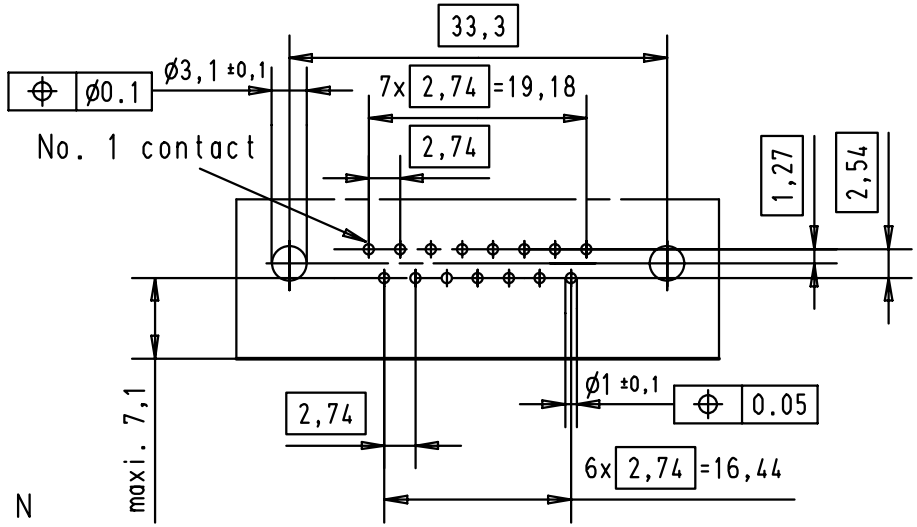

Mounting force on Printed board : 25 - 80 N

							Dat.	Name		D-Sub male low profile 15 poles with solder pins, screw-lock, board lock and grounding pins	Maßstab/ *Scale*
						Detail.	23-NOV-01	JB			
						Insp.			All Dim. in mm Orig. Size DIN A 4		1,5:1
09 66 262 6817	4-40 UNC	2				Stand.					
09 66 262 7817	4-40 UNC	3				HARTING EURL F-95972 Paris				TB 09 66 262 X81x	Blatt/ *Page* 5
09 66 262 5817	4-40 UNC	0,76 µm Au	29733	23-NOV-01	JB						
Part number	screw-lock	Performance level	Mod.	Dat.	Name					Sub.	