





插頭部件 (Plug Component)			頭部剥皮尺寸 (Dimensions)			線材規格 (Wire Styls)	尾部剥皮尺寸 (Dimensions)			尾插部件 (Connector Component)		
顏色(Color)	零件描述(Component)	Qty.	內剥(Strip)	外剥(ROJ)	顏色(Color)		外剥(R.O.J)	內剥(Strip)	顏色(Color)	規格描述(Instruction)	Qty.	顏色(Color)
35P 黑色 (Black)	ME-101 (1-15P, Non-Polarized)	1	6 <sup>+1</sup> <sub>-0</sub>	15 ± 2	黑/Black(L)	SPT-2 18AWG*2C	15 ± 2	5 <sup>+1</sup> <sub>-0</sub>	黑/Black(L)	FM-1FN (IEC 60320, C7)	1	35P 黑色 (Black)
鍍鎳 (Nickel-Plated)	6.3*1.5 單片平頭端子 (Solid Blades)	1	6 <sup>+1</sup> <sub>-0</sub>	15 ± 2	白/White(N)	105°C 黑色 (BLACK)	15 ± 2	5 <sup>+1</sup> <sub>-0</sub>	白/White(N)	O-Type Receptacle Terminal	2	銅本色 (Brass-Natural)
						Length : 2000±50 (79"±2")						

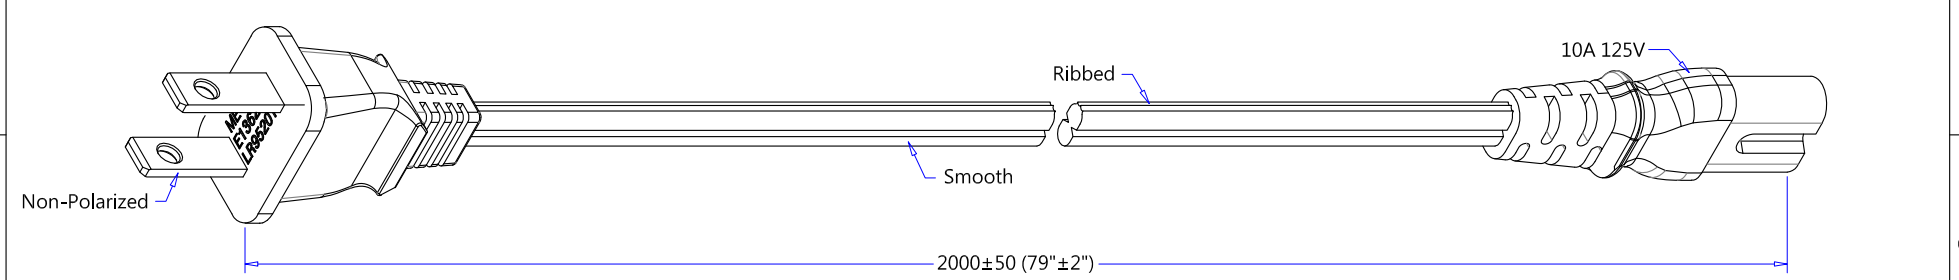


ME-101 (1-15P, Non-Polarized)  
(Dimensions of Plug Face)

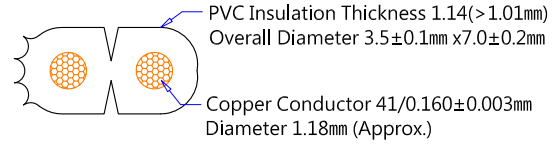

SPT-2 18AWGx2C 截面圖 (Wire Cross-Section)

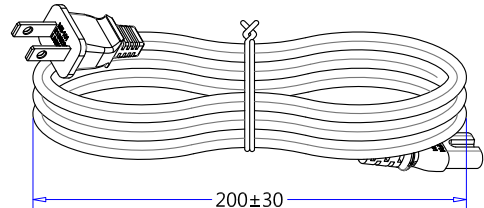

B-C#2 扎線圖示 (Tied Loop Hank Detail)



FM-1FN (IEC 60320, C7)  
(Dimensions of Connector Face)

REV	DATE	REVISE CONTENT
A	08/06-2012	The first edition is issued and drawing.
F		

- NOTE:**
- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
  - Insulation Resistance Test : DC 500/min>100 meg-ohm.
  - Continuity & Polarization Test : No short circuit, break circuit, displacement.
  - Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
  - Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
  - All material according to Non-toxic standard.(Material must be RoHS compliant.)
  - "FMC" logo maybe present on 1-15P.

線材印字 (Wire Printed)		充實, 油墨印字 (Un-Fillers, Printing Ink)		<b>CnC Tech, LLC</b> Industrial Cable and Connector Technology			
包裝方式 (Packing)		DRAWN <i>Chu8.</i>					
Tied Hank	See Hank Detail	DATE 08/06-2012		CUSTOMER	CnC		
Carton Size	480 x 320 x 150			P/N No.	800-18-3-2-SPT2-BL-00200		
Pack Number	100 pcs/ <small>UL Laster Labels</small>	TYPE NEMA 1-15P to IEC 60320, C7 Power Supply Cord		MATERIAL	PVC	UNIT	mm
Carton Print	See Purchase Order			Customer Approval			
DRAWING NO.	098MM980	REV	A				

業務校閱： 品質校閱：