

Sensor/Actuator cable - SAC-5P-M12MS/ 2,0-PUR/M12FR3LV - 1501537

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/Actuator cable, 5-position, PUR halogen-free, Irradiated, orange RAL 2003, Plug straight M12, A-coded, on Socket angled M12, A-coded, with 3 LEDs, Cable length: 2 m, Customer-specific version

Key Commercial Data

| | |
|------------------------|----------|
| Packing unit | 1 STK |
| Minimum order quantity | 25 STK |
| Custom tariff number | 85444290 |
| Country of origin | Poland |

Technical data

Environmental Product Compliance

| | |
|------------|--|
| China RoHS | No hazardous substances above threshold values |
|------------|--|

Dimensions

| | |
|-----------------|-----|
| Length of cable | 2 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |

General

| | |
|-----------------------|--------------|
| Rated current at 40°C | 4 A |
| Rated voltage | 24 V |
| Number of positions | 5 |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |
| Status display | 3 LEDs |
| Overvoltage category | II |
| Degree of pollution | 3 |

Sensor/Actuator cable - SAC-5P-M12MS/ 2,0-PUR/M12FR3LV - 1501537

Technical data

General

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|

Material

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

Cable

| | |
|---|---|
| Cable type | PUR irradiated halogen-free orange |
| Cable type (abbreviation) | 150 |
| Cable abbreviation | D12YSL11X-JB |
| Conductor cross section | 4x 0.34 mm ² (Signal line) |
| | 1x 0.5 mm ² (PE connection) |
| AWG signal line | 22 |
| AWG power supply | 20 |
| Conductor structure signal line | 42x 0.10 mm |
| Conductor structure, voltage supply | 24x 0.15 mm |
| Wire colors | Brown, blue, black, white, green/yellow |
| Overall twist | 5 cores, twisted |
| External sheath, color | orange RAL 2003 |
| External cable diameter D | 5.2 mm ±0.2 mm |
| Smallest bending radius, fixed installation | min. 20 mm |
| Smallest bending radius, movable installation | min. 30 mm |
| Number of bending cycles | 5000000 |
| Bending radius | 52 mm |
| Traversing path | 10 m |
| Traversing rate | 3 m/s |
| Outer sheath, material | PUR |
| Material conductor insulation | PE |
| Conductor material | Bare Cu litz wires |
| Conductor resistance | ≤ 57.5 Ω/km (with 0.34 mm ² conductor cross section) |
| | ≤ 39 Ω/km (with 0.5 mm ² conductor cross section) |

Sensor/Actuator cable - SAC-5P-M12MS/ 2,0-PUR/M12FR3LV - 1501537


Technical data

Cable

| | |
|---------------------------------|--|
| Nominal voltage, cable | 250 V (AC) |
| Test voltage, cable | 2000 V (50 Hz, 5 minutes) |
| Special properties | Silicone-free |
| Flame resistance | DIN VDE 0472 part 804, test type B |
| Halogen-free | The cable is halogen-free |
| Other resistance | hydrolysis and microbe resistant |
| | UV resistant |
| | Resistant to welding splashes |
| Ambient temperature (operation) | -50 °C ... 105 °C (cable, fixed installation) |
| | -40 °C ... 105 °C (cable, flexible installation) |


Drawings

Schematic diagram



Pin assignment M12 male connector, 5-pos., A-coded, male side

Schematic diagram




Pin assignment M12 socket, 5-pos., A-coded, socket side view

Cable cross section



PUR irradiated halogen-free orange [150]


Dimensional drawing

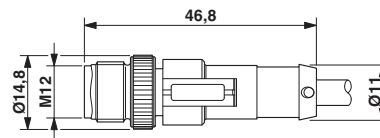

M12 x 1 plug, straight

Sensor/Actuator cable - SAC-5P-M12MS/ 2,0-PUR/M12FR3LV - 1501537

Dimensional drawing



M12 x 1 socket, angled

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Sensor/Actuator cable - SAC-5P-M12MS/ 2,0-PUR/M12FR3LV - 1501537

Approvals


Approvals


UL Listed / cUL Listed / cULus Listed


Ex Approvals

Approvals submitted

Approval details

| | |
|---|------|
| UL Listed  | |
| Nominal current I _N | 4 A |
| Nominal voltage U _N | 24 V |

| | |
|--|------|
| cUL Listed  | |
| Nominal current I _N | 4 A |
| Nominal voltage U _N | 24 V |

| | |
|--|--|
| cULus Listed  | |
|--|--|