




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

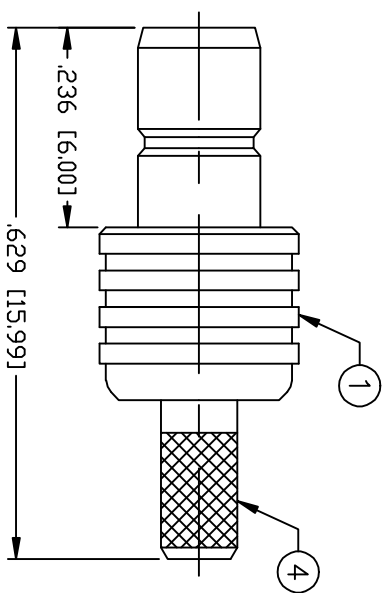



PIN TO BE SOLDER



RECOMMENDED CRIMP DIE: 130"

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-4 GHz
WORKING VOLTAGE: 335 V rms Max. @ Sea Level
VSWR MAX: 1.15
INSERTION LOSS(DB): $0.03 \times \sqrt{f(\text{GHz})}$
CONTACT RESISTANCE: $\leq 6 \text{ m Ohm}$
INSULATION RESISTANCE: 1k M Ohms min.
TEMPERATURE RANGE: -65°C TO 165°C
FOR RG-316 DOUBLE SHIELD

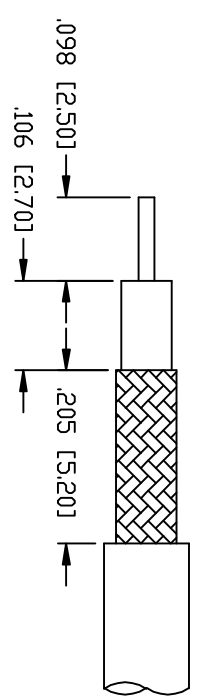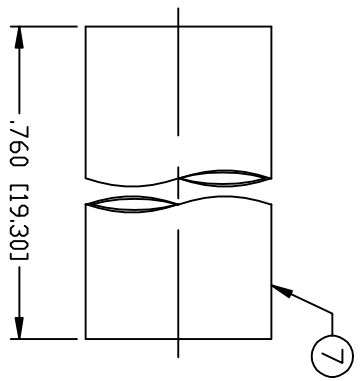

RECOMMENDED STRIPPING DIMENSIONS

1	BODY	1	BRASS	GOLD, 5 μ "	000713	DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED TOLERANCES ARE: DECIMALS	DIAMETER
2	INSULATOR	1	PTFE	---			
3	INSULATOR	1	PTFE	---			
4	FERRULE STUD	1	BRASS	GOLD, 5 μ "			
5	PIN	1	BRASS	GOLD, 30 μ "			
6	FERRULE	1	COPPER	GOLD, 5 μ "			
7	TUBING	1	HEAT SHRINK	---			
8							
9							
10							
11							
12							
13							
14							
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE	
						08/06/96	