

## SUMMARY

### # Wires

Low voltage 34



*Image is for illustrative purpose only*

Series 2P  
Termination type Male solder  
IP rating 50  
AWG wire size 0.00 - 0.00  
Cable Ø 0.00 - 0.00 mm  
Status active

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model CK\*: Fixed receptacle with two nuts (back panel mounting)  
Keying No keying  
Housing Material  
Weight 6.31 g

### Performance

Configuration 2P.M34 : 34 Low V.  
Insulator L: PEEK for solder contacts  
Rated Current 1.5 Amps

### Specifications

Test voltage (kV rms) Contact-contact: 0.7  
Air clearance min.: 0.3 mm  
Creepage distance min.: 0.3 mm


### Others

Endurance (Shell): >1000 mating cycles  
Temp (min / max): -50°C / +170°C  
F ret (min): 150 N

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

F ret (max): 250 N  
Steam sterilization: > 100 times

## DRAWINGS

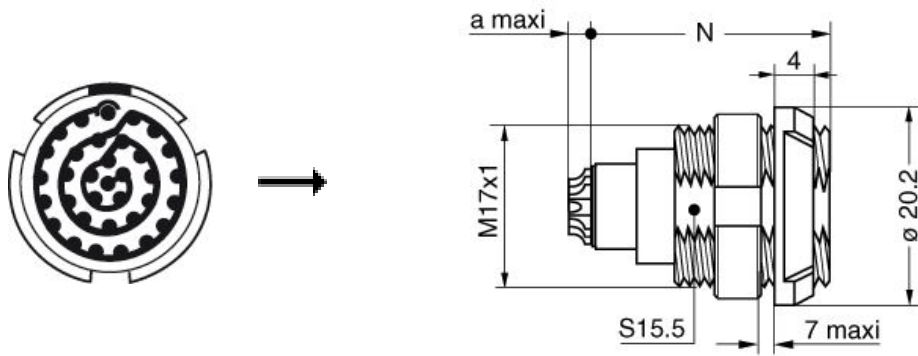

**No keying**

### Dimensions

	N	a
mm.	23.8	3.4-4.9
in.	0,94	0,13

## RECOMMENDED BY LEMO

### Tools

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*