

Ŧ	G	П	m	O



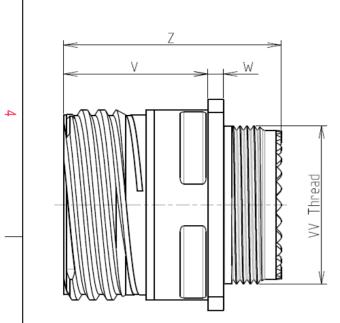

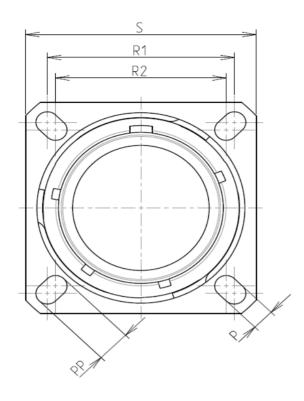

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C : 500 hours -Salt Spray

: 32.47 g ± 10%

8D 0

G

11

S

01

S


F

В

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 20.62 R1 18.26 R2 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M15x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

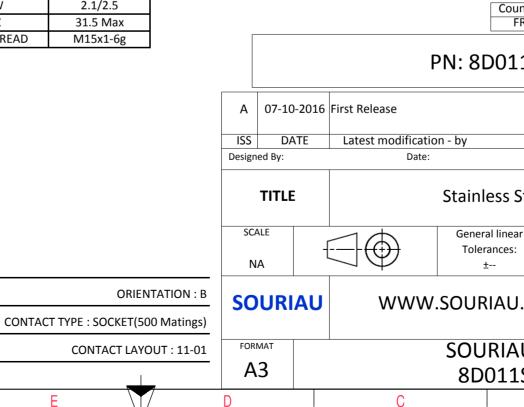



SHELL SIZE : 11

PLATING : S = Nickel

Н

-Mass

	Φ		А			
					4	
AS EXA	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third part			2	
	1			MOD N°	\vdash	
Stee	CUSTOMER DRAWING Steel Receptacle 8D series r NPRDS / PROJECT					
		8	59		1	
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U I	DRG N°			SHEET]	
S0	1SB-C			1/2		
	В		А		L	

	Ξ	۵	ار (m	D	0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		* ~	
ယ	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR PN: 8D011S
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	General linear Tolerances:
					FORMAT A3	U WWW.SOURIAU.CO SOURIAU 8D011S0
	Н	G	F	E	D	C 8001130

