



1-phase filters FN 610

General purpose EMI filter



- Rated currents from 1 to 30A
- Good overall differential and common-mode attenuation
- Optional medical versions (B type)
- Optional safety versions (A type)

Approvals



RoHS
2002/95/EC


Technical specifications

Maximum continuous operating voltage:	250VAC, 50/60Hz
Operating frequency:	dc to 400Hz
Rated currents:	1 to 30A @ 40°C max.
High potential test voltage:	P → E 2000VAC for 2 sec P → E 2500VAC for 2 sec (B types) P → N 760VAC for 2 sec
Temperature range (operation and storage):	-25°C to +100°C (25/100/21)
Flammability corresponding to:	UL 94V-2 or better
Design corresponding to:	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
MTBF @ 40°C/230V (Mil-HB-217F):	1,200,000 hours

Features and benefits

- FN 610 filters are designed for easy and fast chassis mounting.
- FN 610 filters offer a perfect combination of performance/size ratio.
- All filters provide a good symmetrical and asymmetrical attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior.
- General purpose filter attenuation performance suitable to be used in a broad range of applications.
- Multiple terminal connections like faston with additional spade solder possibility, wire connection and screw connection.
- Optional safety (A type) or medical (B type) versions with low leakage current.
- FN 610 filters are also available as two-stage filters (FN 660, FN 670 series).
- Custom-specific versions on request.

Typical electrical schematic

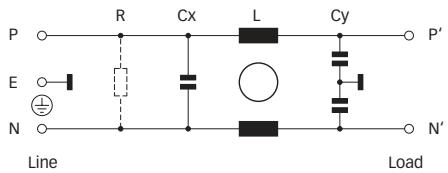

Typical applications

- Electrical and electronical equipment
- Consumer goods
- Household equipment
- Medical equipment
- Office automation equipment
- Datacom equipment

Filter selection table

Filter*	Rated current @ 40°C (25°C)	Leakage current** @ 230VAC/50Hz	Inductance L	Capacitance Cx Cy	Resistance R	Input/Output connections	Weight	
	[A]	[µA]	[mH]	[nF]	[kΩ]		-03/-06	-07
FN 610-1...	1 (1.15)	190	3	33 2.2			-06	55 65
FN 610-3...	3 (3.4)	190	2	33 2.2			-06	60 70
FN 610-6...	6 (6.9)	190	0.75	33 2.2			-06	60 70
FN 610-10...	10 (11.5)	190	0.45	33 2.2			-06	85 95
FN 610-20-06	20 (23)	190	0.48	33 2.2			-06	220
FN 610-30-03	30 (34)	190	0.61	33 2.2		-03		630
FN 610A-1...	1 (1.15)	40	3	33 0.47	1000		-06	55 65
FN 610A-3...	3 (3.4)	40	2	33 0.47	1000		-06	60 70
FN 610A-6...	6 (6.9)	40	0.75	33 0.47	1000		-06	60 70
FN 610A-10...	10 (11.5)	40	0.45	33 0.47	1000		-06	85 95
FN 610B-1...	1 (1.15)	2	3	33 1000			-06	55 65
FN 610B-3...	3 (3.4)	2	2	33 1000			-06	60 70
FN 610B-6...	6 (6.9)	2	0.75	33 1000			-06	60 70
FN 610B-10...	10 (11.5)	2	0.45	33 1000			-06	85 95
FN 610B-20-06	20 (23)	2	0.48	33 1000			-06	220


* To compile a complete part number, please replace the ... with the required I/O connection style (e.g. FN 610-1-06, FN 610B-30-03).

** Maximum leakage under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage could reach twice this level.


Typical filter attenuation

Per CISPR 17; A = 50Ω/50Ω sym; B = 50Ω/50Ω asym; C = 0.1Ω/100Ω sym; D = 100Ω/0.1Ω sym


1 to 6A types

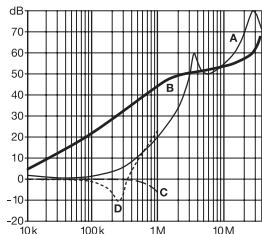

10 and 20A types


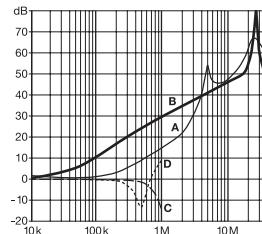


30A types


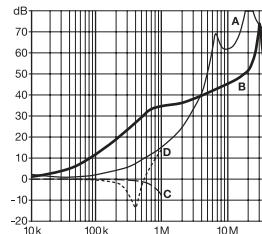


Mechanical data



Connection style -06, 1 to 10A types

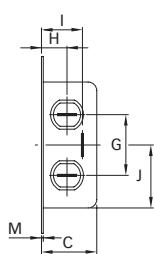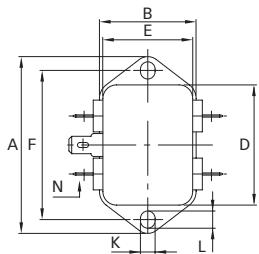



Connection style -06, 20A types

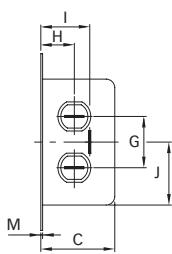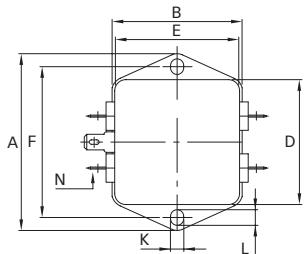

Connection style -07, 1 to 10A types (same dimensions as style -06)

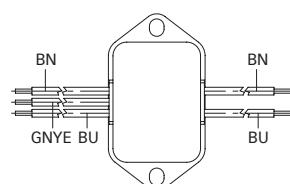

Connection style -03, 30A types

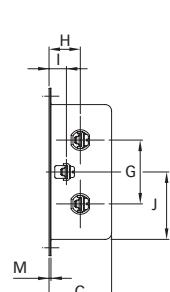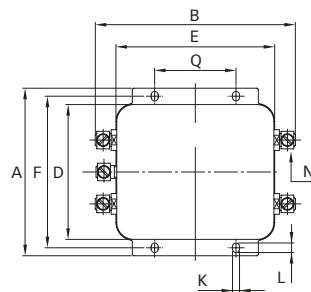

Dimensions

	1A	3A	6A	10A	20A	30A	Tolerances
A	64	64	64	64	71	105	± 0.5
B	35	35	35	35	52.6	126	± 0.5
C	19.3	19.3	19.3	29.3	29.3	38.6 ± 1	± 0.5
D	43.5	43.5	43.5	43.5	50.5	84.5 ± 1	± 0.3
E	32.5	32.5	32.5	32.5	50.5	98.5 ± 1	± 0.5
F	54	54	54	54	61	95	± 0.2
G	21	21	21	21	21	40	± 0.5
H	9.3	9.3	9.3	9.3	14.3	19.6	± 0.5
I	15.3	15.3	15.3	15.3	20.3	10.1	± 0.5
J	16.25	16.25	16.25	16.25	25.25	42.25	± 0.5
K	5.3	5.3	5.3	5.3	5.3	4.4	
L	6.3	6.3	6.3	6.3	6.3	6	
M	0.7	0.7	0.7	0.7	0.7	1.2	
N	6.3 x 0.8						

Connection style -03

N	M6
Q	51 ± 0.1

Connection style -07

O	8.3	8.3	8.3	8.3	± 0.5
P	21.75	21.75	21.75	21.75	± 0.5
AWG type wire	AWG 20	AWG 18	AWG 16	AWG 14	
Wire length	140	140	140	140	± 5

All dimensions in mm; 1 inch = 25.4mm

Tolerances according: ISO 2768 / EN 22768