



Que-2-TXT™
Questions?
scan to text us fast



HID EQUAL LED LAMPS

SIDE ADJUSTABLE




specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THC	Beam Angle	Enclosed Fixture Rated
80 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	4 KV built-in	-40° - 113°	> 0.9	wet location	< 20%	180°	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-SAL-C400-UL4	5000K	EX39	11,200	140 lm / W

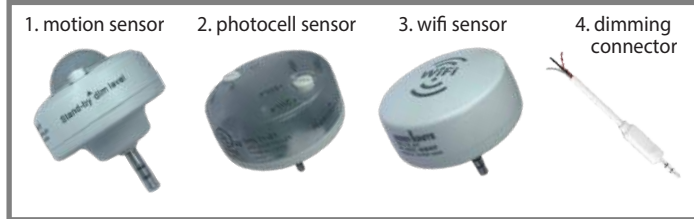

other

Dimensions	Warranty	Gross Weight	Case QTY
8.74" (L) x 4.37" (D)	6 years	3.53 lbs	6 pcs


add your accessories*

Accessories Part Number	Description
1. GI-ACC-MBMS	motion sensor
2. GI-ACC-MBPC	photocell
3. GI-ACC-MBWF	wifi sensor
4. GI-ACC-MBDC	dimming connector

*optional

Features

- ▶ Waterproof and flame retardant casing
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof
- ▶ Foldable wings and rotateable base

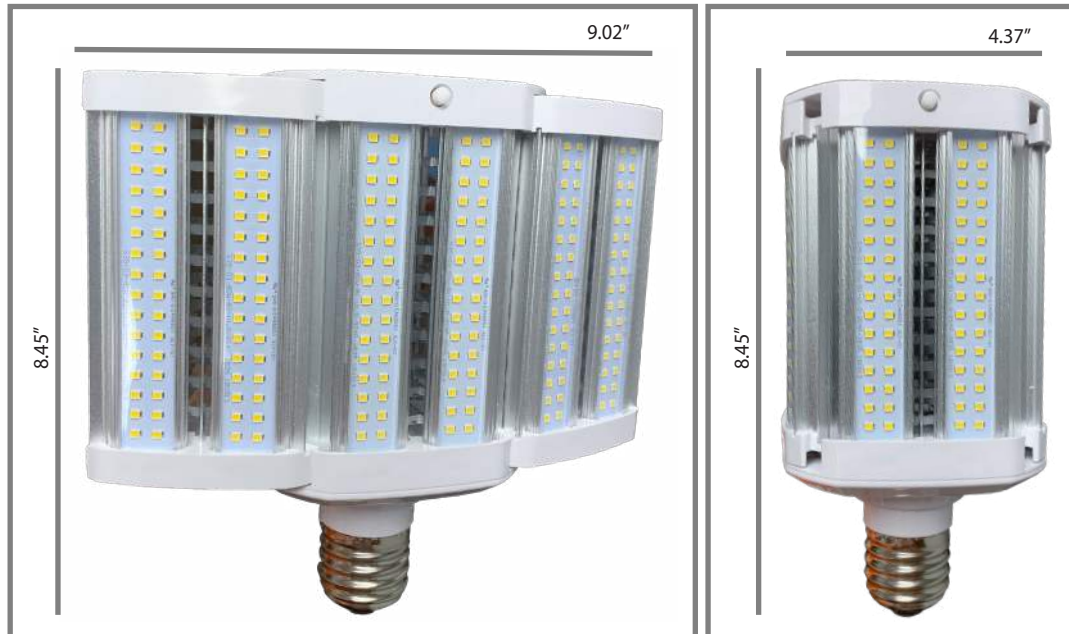

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779