

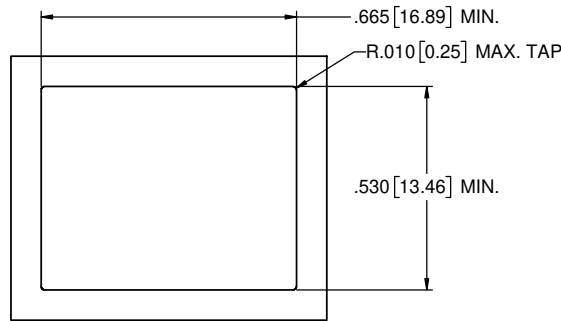


TOP VIEW

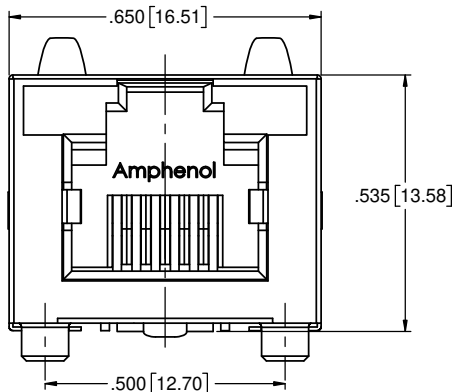


RECOMMENDED PANEL CUTOUT
SCALE 4:1


REVISIONS				
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D	
A	PROPOSAL DRAWING PER EAR# RJ18216	DEC14/18	L.CHAN	




FRONT VIEW

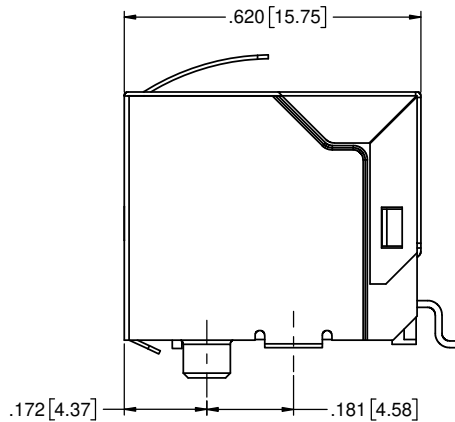

SIDE VIEW

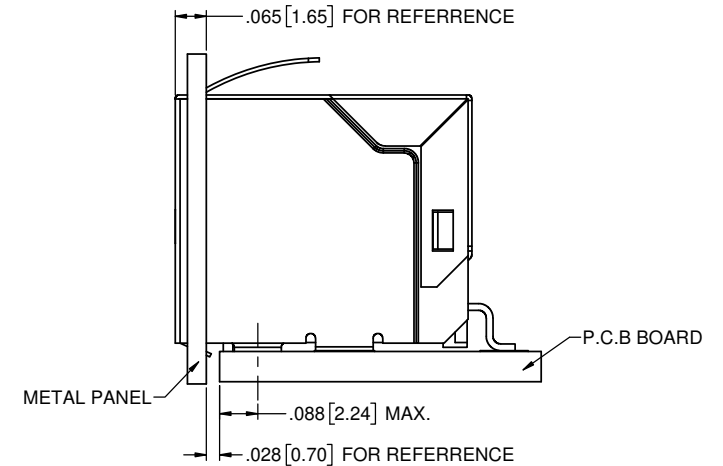

SIDE VIEW SHOWING
WIHT PANEL AND P.C.B BOARD

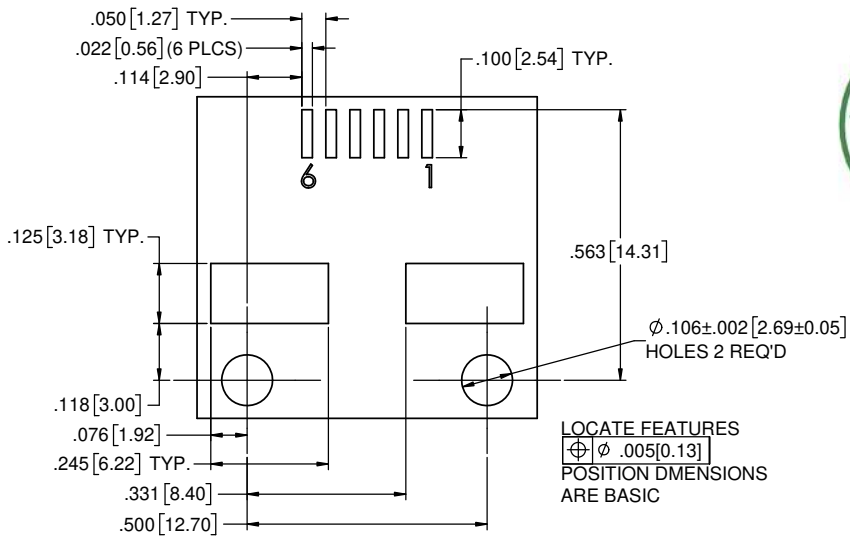

RECOMMENDED P.C.B LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE FEATURES
⊕ Ø .005 [0.13]
POSITION DIMENSIONS
ARE BASIC



NOTES:

1. PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC FLAMMABILITY RATING UL 94V-0, COLOR: BLACK
PHOSPHOR BRONZE
PLATING: 20u" [0.51 MICRONS] MIN. GOLD ON MATING SURFACES.
50u" [1.27MICRONS] MIN. NICKEL UNDERPLATE,
100u" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.
2. CONTACTS:
3. SHIELD: COPPER ALLOY
PLATING: NICKEL
4. RECOMMENDED SOLDERING TEMPERATURE:
REFLOW SOLDERING AT 260 °C MAXIMUM FOR 10 SEC MAXIMUM.

AMPHENOL PART NUMBER: RJSSE-7360

UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	DEC14/18
PRIMARY UNITS	CHECKED	L.CHAN	DEC14/18
SECONDARY	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE	ENG. REL. NO.	EAR# RJ18216	
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES	THIRD ANGLE PROJECTION		
ANGULAR DEGREES	DO NOT SCALE DRAWING		

Amphenol Canada Corp.			
Commercial Products			
SINGLE PORT, SURFACE MOUNT, RJ45 MODULAR JACK, 6 POSITION, 6 CONTACTS, SHIELDED -RoHS COMPLIANT			
DWG. NO.	P-RJSSE-7360	REV	A
CODE ID NO.	03554	DWG SIZE:	X
SCALE:	5:1	SHEET	1 OF 1