

DIM. A = 2.50 X No. of Spaces
 DIM. B = DIM. A + 5.00
 DIM. C = DIM. A + 3.60

* Available in 2 through 15 Circuits

Note:

1. Material:

* Insulation: Nylon 6T+30% G.F. UL 94V-0, Color Nature (Halogen-Free)

* Contact: Brass, round pins

2. For Lead Free Wave flow Process

Ordering Code:

CI25 ** P 1 H 00 -NH
 ① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Contact type: P= Pin header


④ Plating option:

1 = 3.05µm(120µ")Matte Tin
 over 0.76µm(30µ") Nickel

⑤ Tail Style: H= Right Angle

⑥ Option: 00= Standard

⑦ -NH= For Lead Free Wave flow Process
 and Halogen-Free

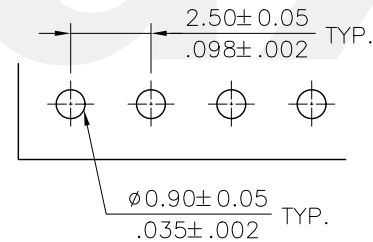


Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS Compliant

CVILUX CORP
2013.06.06
ISSUED

4				DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE HEADERS	 瀚荃股份有限公司 CviLux Corporation
3			DRAWN BY: Karen	5/24-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWING NO. CI2532SA	
2			ENGINEER: Easley	5/27-13'	.X ± 0.30/.012 X' ± 1"		
1			CHECKED BY: Easley	5/27-13'	.XX ± 0.20/.010 X' ±	SCALE 3 / 1	
SYM	NAME	DATE	APPROVED BY: David	5/27-13'	.XXX ± 0.10/0.04 XX' ±	FINISH:	SHEET 1 OF 1