
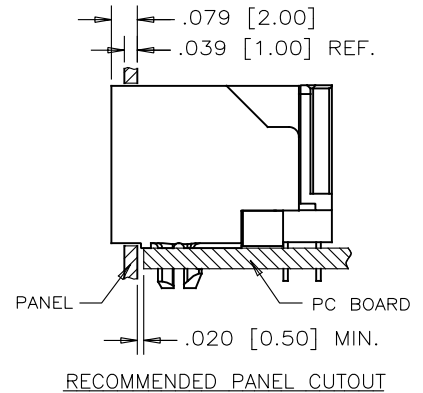
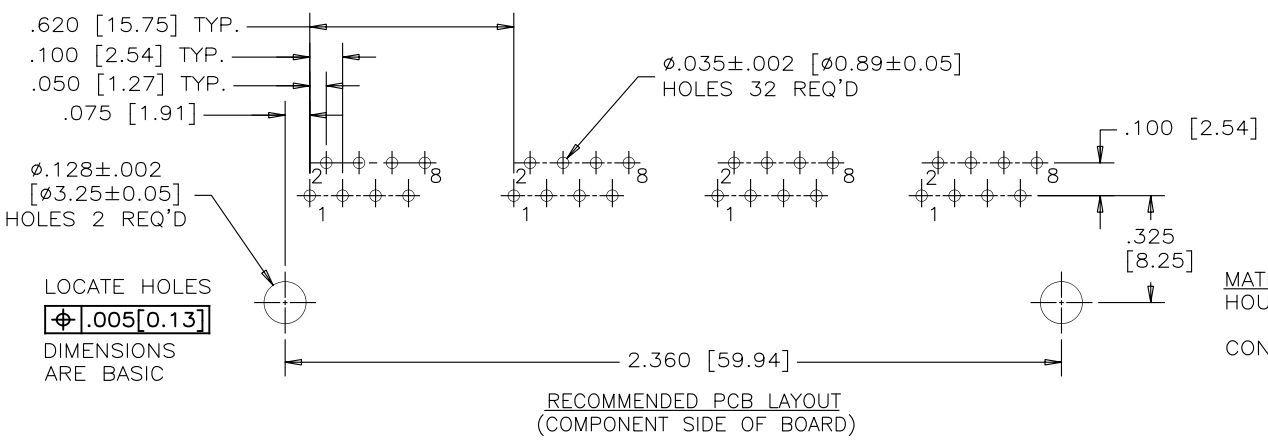
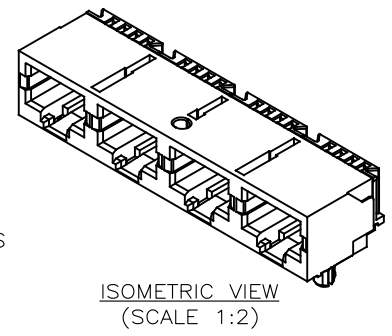
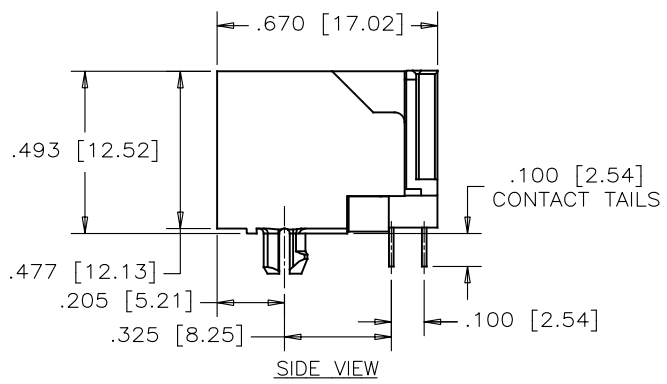


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APR14/20	L.CHAN

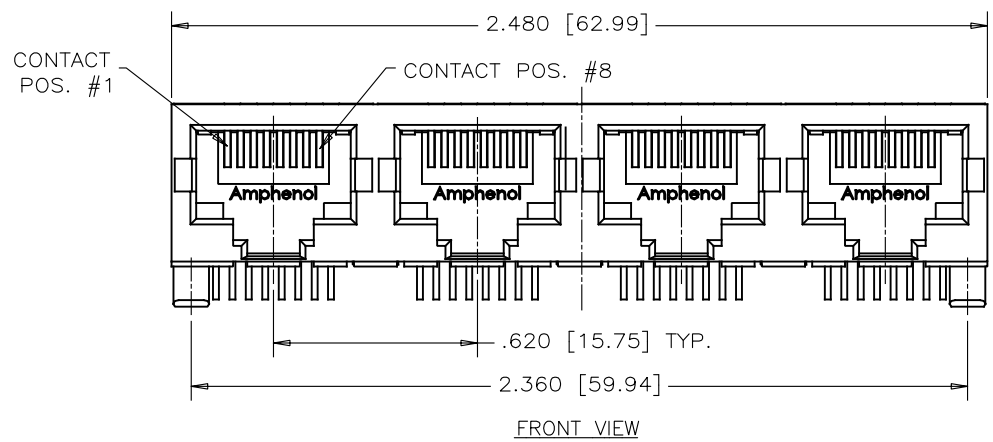


MATERIALS:
HOUSING: ENGINEERING THERMOPLASTIC, FLAMMABILITY RATING UL 94V-0, COLOR: BLACK
CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACE, SEE PART NO. FOR THICKNESS.
 50μ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
 100μ" [2.54 MICRONS] MIN. MATTE-TIN OR GOLD FLASH ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
 WAVE SOLDERING AT 260° MAXIMUM FOR 5~8 SECONDS.

AMPHENOL PART NUMBER: RJSBE-X080-C4

GOLD PLATING OPTIONS:
 D = 6μ" GOLD PLATING
 G = 15μ" GOLD PLATING
 J = 30μ" GOLD PLATING
 5 = 50μ" GOLD PLATING

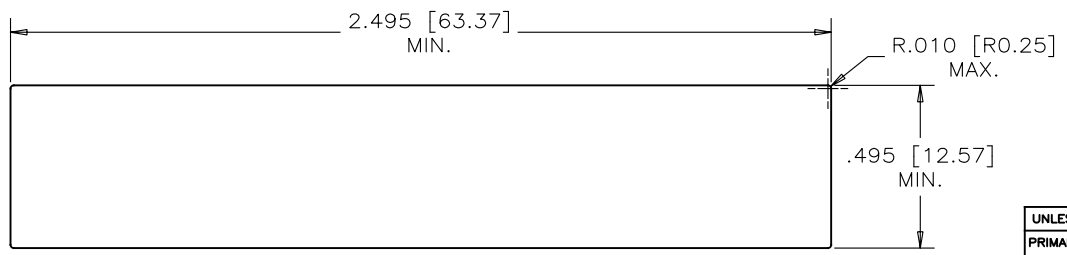

UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	APR14/20
PRIMARY UNITS INCHES	CHECKED	KELVIN.T	APR14/20
SECONDARY MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1.5°	DO NOT SCALE DRAWING		

Amphenol Canada Corp. Commercial Products	
FOUR PORTS MODULAR JACK, 8 POSITION, 8 CONTACTS, UNSHIELDED GOLD PLATING OPTION, WITHOUT LED -RoHS COMPLIANT	
DWG NO.	P-RJSBE-X080-C4
CODE ID NO. 03554	DWG SIZE X SCALE 1:1 SHEET 1 OF 1