

AMP | Junior Power Timer TE Internal #: 1-967624-3 Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Green, Wire & Cable, Signal, Junior Power Timer

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Board, Wire-to-Wire

Number of Positions: 18

Centerline (Pitch): 5 mm [.197 in]

All Timer Connector Housing (589)

Features

Product Type Features

Connector Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals

| Connector System | Wire-to-Board, Wire-to-Wire |
|-----------------------------------|-----------------------------|
| Sealable | No |
| Hybrid Connector | No |
| Primary Locking Feature | On the Terminal |
| Connector & Contact Terminates To | Wire & Cable |
| Configuration Features | |
| Number of Positions | 18 |
| Number of Rows | 3 |
| Electrical Characteristics | |
| Nominal Voltage Architecture | 28 V |
| Body Features | |
| Primary Product Color | Green |
| Connector & Keying Code | A |
| Contact Features | |
| | |

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Green, Wire & Cable, Signal, Junior Power Timer



| Contact Size | 2.8mm |
|------------------------------|----------------------------|
| Contact Type | Receptacle |
| Mating Tab Width | 2.8 mm[.11 in] |
| Contact Current Rating (Max) | 30 A |
| Mechanical Attachment | |
| Terminal Position Assurance | Yes |
| Strain Relief | Without |
| Mating Alignment Type | Keyed |
| Mating Alignment | With |
| Connector Mounting Type | Cable Mount (Free-Hanging) |
| Housing Features | |
| Housing Material | PBT GF |
| Centerline (Pitch) | 5 mm[.197 in] |
| Dimensions | |
| Connector Height | 26.5 mm[1.043 in] |
| Product Length | 34.8 mm[1.37 in] |
| | |

Usage Conditions

| Operating Temperature (Max) | 100 °C[212 °F] |
|---|---|
| Operating Temperature Range | -30 – 100 °C[-22 – 212 °F] |
| Operation/Application | |
| Circuit Application | Signal |
| Packaging Features | |
| Packaging Method | Carton |
| Other | |
| Serviceable | No |
| Connector Position Assurance Capable | No |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Green, Wire & Cable, Signal, Junior Power Timer





EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC Halogen Content BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources. Solder Process Capability Not applicable for solder process capability


Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

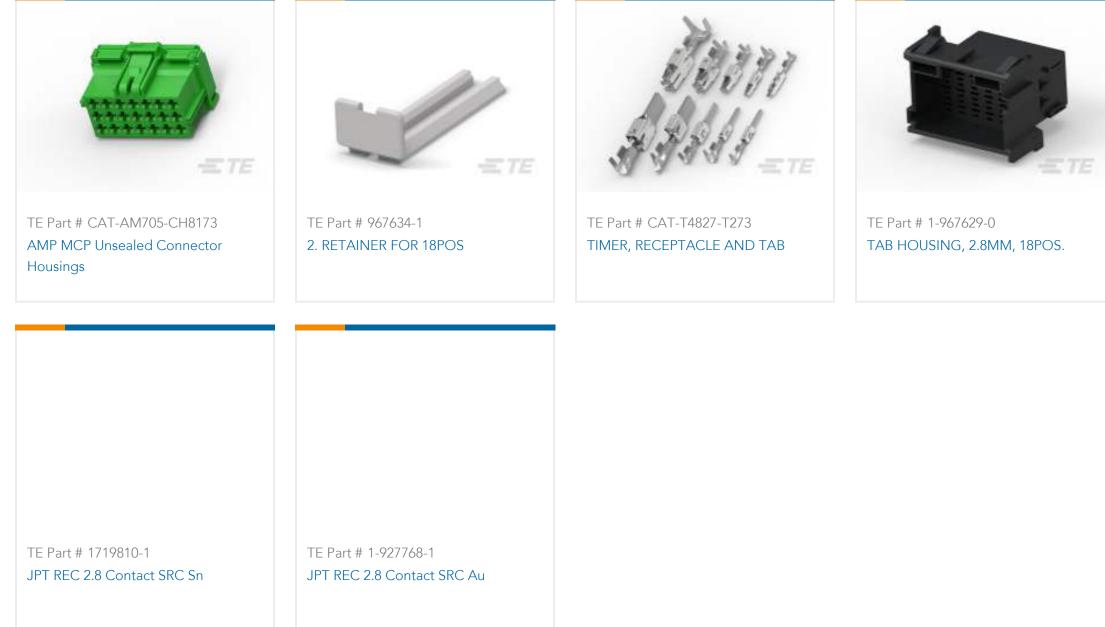

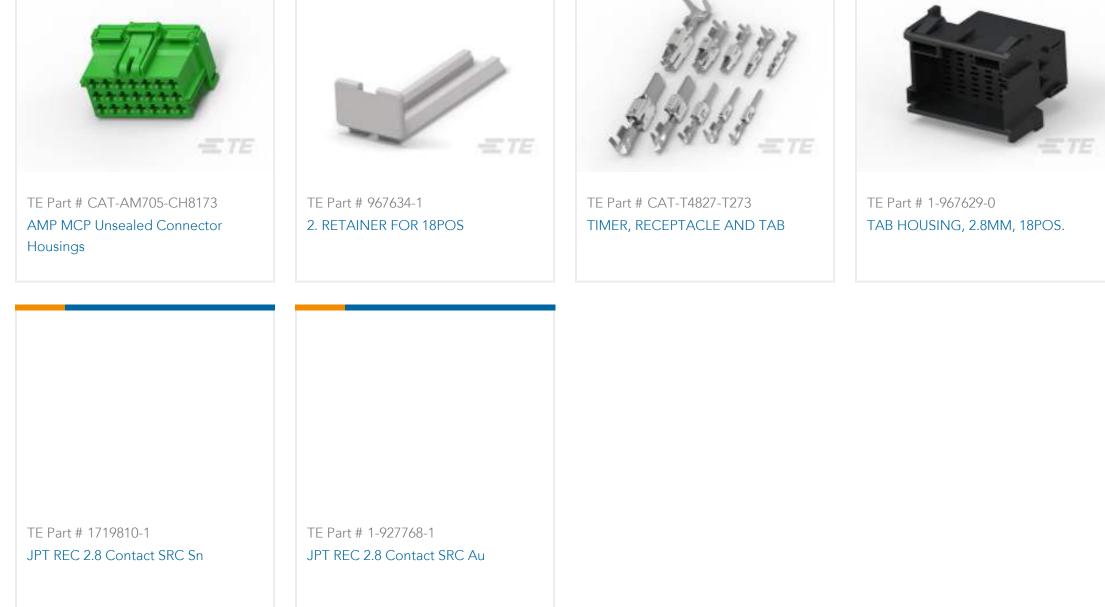

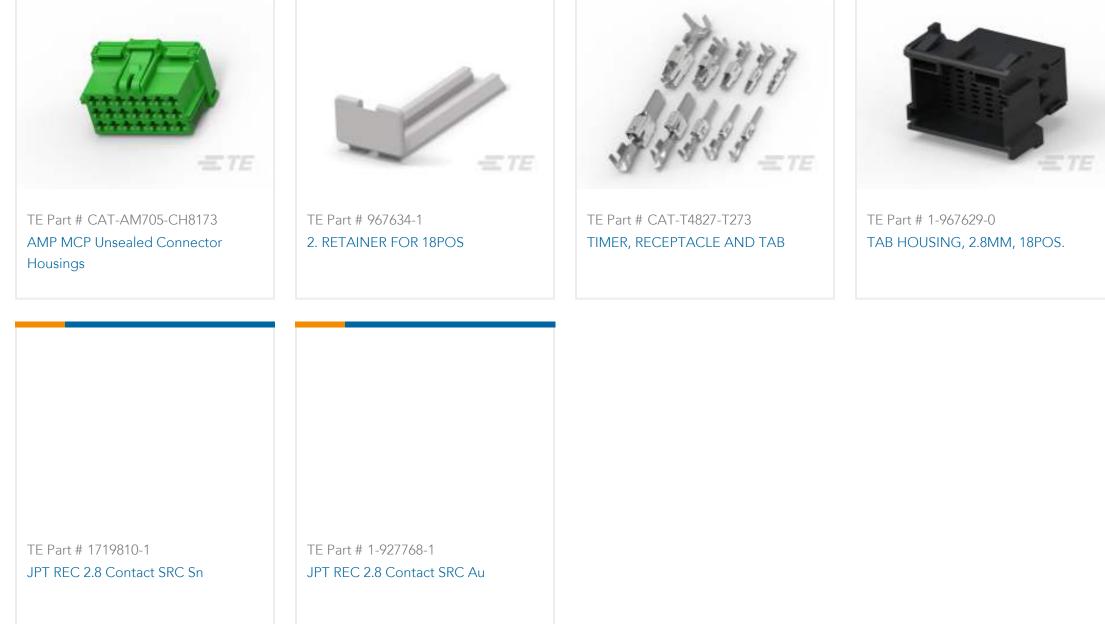


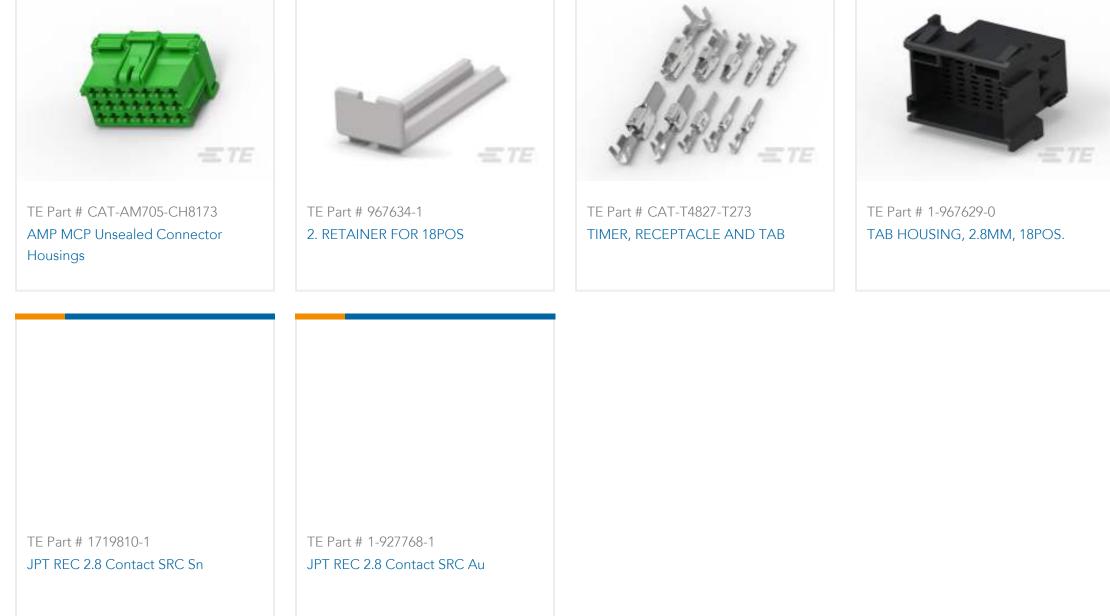

Also in the Series Junior Power Timer

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Green, Wire & Cable, Signal, Junior Power Timer



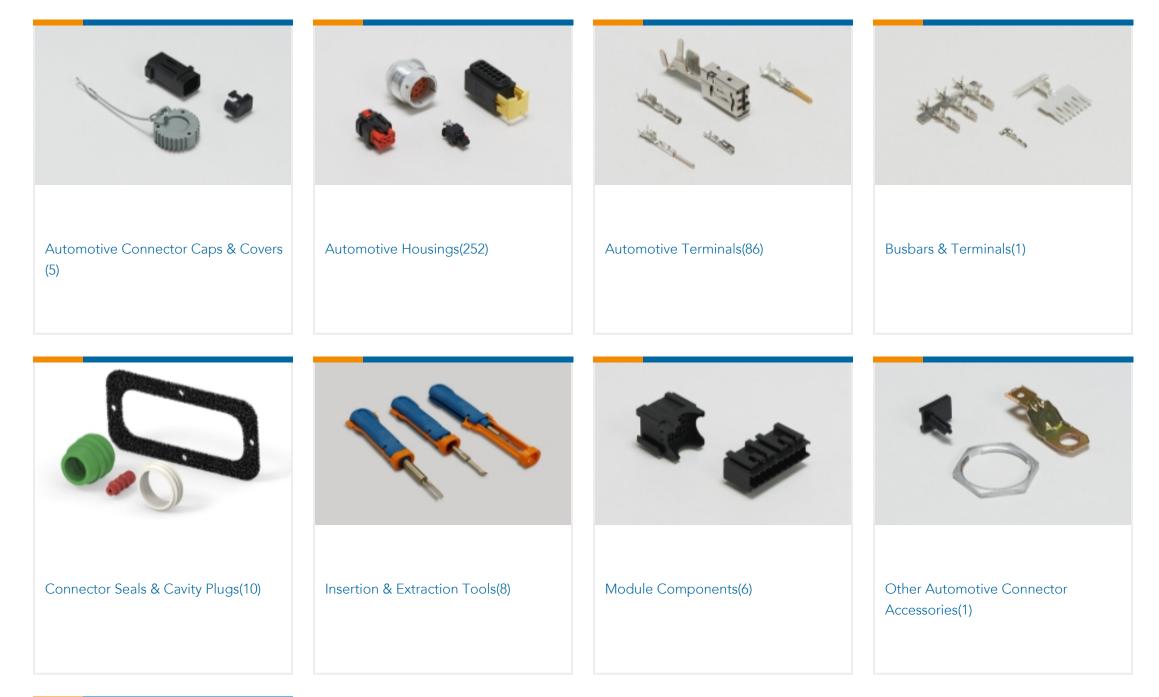



PCB Headers & Receptacles(1)

Customers Also Bought



TE Part #1-967624-4 Timer Connector Housing

Documents

Product Drawings JUN-POW-TIM GEH 18P

English

CAD Files

3D PDF

3D

Customer View Model

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Green, Wire & Cable, Signal, Junior Power Timer



ENG_CVM_CVM_1-967624-3_C.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_1-967624-3_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-967624-3_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Timer Interconnection System

English

Product Specifications

Product Specification

English

Product Specification

English