NOTES:


CUSTOMER PRINT

CARA6A808PPXXX90

ä


PART NUMBE

- FINISHED PRODUCT TO BE COILED
 OVERMOLD BOOT MATERIAL: UV PBT, BLACK
 ELECTRICAL TEST: 100% CONTINUITY
- 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

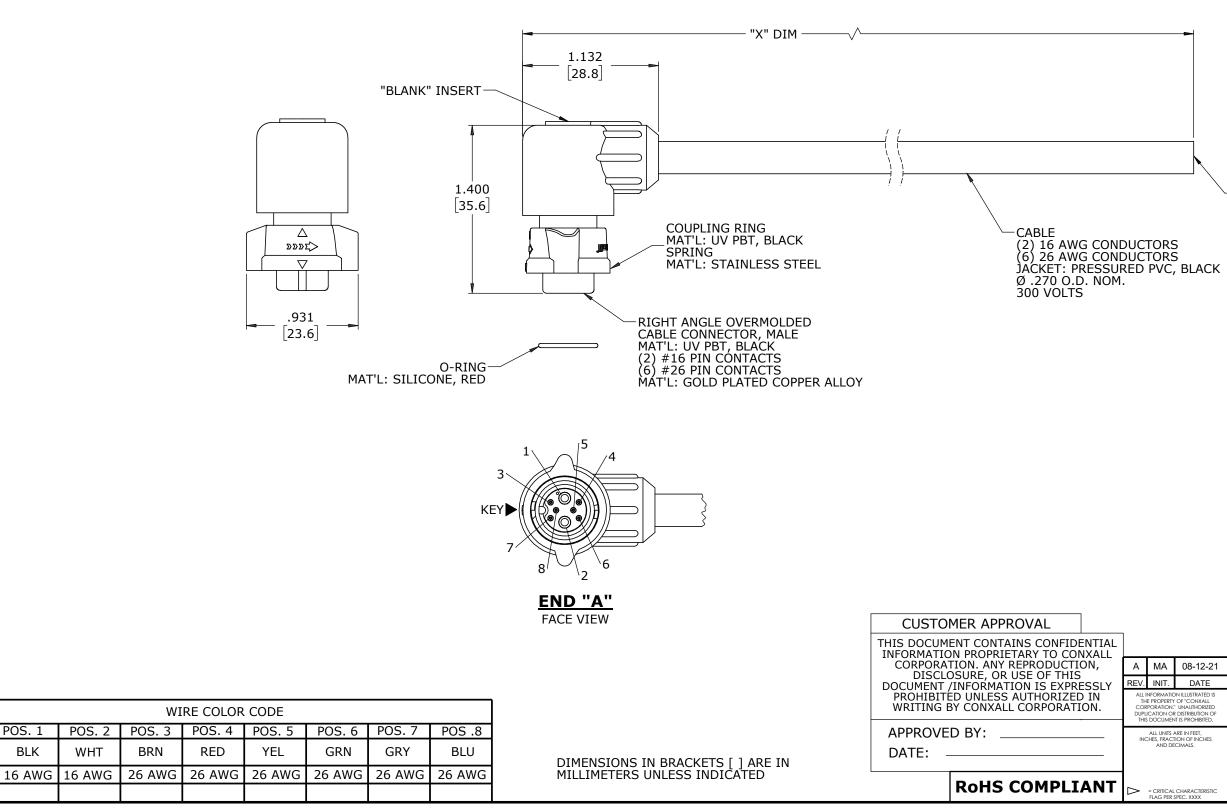

ASS'Y P/N	"X" DIM
CARA6A808PP03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CARA6A808PP07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CARA6A808PP19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CARA6A808PP39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CARA6A808PP <u>XXX</u> 90	

- CABLE CUT LENGTH IN "INCHES"





A	MA	08-12-21	DRAWIN	DRAWING CREATED PER DOR 21-109361DS-1					
EV.	INIT.	DATE	DESCRIPTION						
THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED			ORIG. DRAWN MA CHECKED BY		date: 08-12-21	conxall			
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.					601 E. WILDWOOD VILLA PARK, IL 60181				
		APPROVED BY:			TITLE: CABLE ASSEMBLY, RA 2#16/6#26 PIN CONTACTS				
		scale NTS	size B	sheet 1 OF 1	INSTA-CLICK™ MINI-CON-X MIX SIG BULLE" customer: STANDARD PRODUCT	Т			
>		CHARACTERISTIC SPEC. XXXX	FILE: CARA6A808F	PXXX	DIRECTORY: SLW		ev A		