

SAC-6P-15,0-970/FS SCO - Bus system cable



1428607

<https://www.phoenixcontact.com/us/products/1428607>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Bus system cable, VARAN (100 Mbps), 6-position, shielded, free cable end, on Socket straight M12, coding: A SPEEDCON, cable length: 15 m

Commercial data

Item number	1428607
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	BF04
Product key	BF1CMM
Catalog page	Page 324 (PC-2011)
GTIN	4046356322881
Weight per piece (including packing)	1,161.1 g
Weight per piece (excluding packing)	1,110 g
Customs tariff number	85444290
Country of origin	PL

Technical data

Product properties

Product type	Data cable preassembled
Sensor type	VARAN
Number of positions	6
Application	Standard
No. of cable outlets	1
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Interfaces

Bus system	VARAN
Signal type/category	VARAN, 100 Mbps

Signaling

Status display	No
Status display present	No

Electrical properties

Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	30 V AC
	30 V DC
Nominal current I_N	2 A
Transmission medium	Copper

Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

Connection data

Pin assignment

Contact Color (signal designation) Contact (optional)	1 (Socket)
	4 (Socket)
	6 (Socket) BU (Power)

SAC-6P-15,0-970/FS SCO - Bus system cable



1428607

<https://www.phoenixcontact.com/us/products/1428607>

	7 (Socket) BN (Power)
	5 (Socket) GNWH (RD+)
	8 (Socket) GN (RD-)
	2 (Socket) OGWH (TD+)
	3 (Socket) OG (TD-)

Connector

Connection 1

Type	free cable end
------	----------------


Connection 2

Type	Socket straight M12 SPEEDCON
Number of positions	6
Coding type	A (Standard)
Number of positions	6
Locking type	SPEEDCON

Cable/line

Cable length	15 m
--------------	------

VARAN [970]

Dimensional drawing	
Cable weight	81 kg/km
Number of positions	6
Shielded	yes
Cable type	VARAN [970]
Conductor structure	1x2xAWG22/19 + 1x4xAWG24/19
Conductor structure signal line	19x 0.13 mm
AWG signal line	24
Conductor cross section	4x 0.25 mm ² (Signal line) 2x 0.38 mm ² (Power supply)
Wire diameter incl. insulation	1.35 mm (Signal line) 1.5 mm (Power supply)
External cable diameter	7.8 mm ±0.2 mm
Outer sheath, material	SANTOPRENE halogen-free
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires

SAC-6P-15,0-970/FS SCO - Bus system cable



1428607

<https://www.phoenixcontact.com/us/products/1428607>

Material, filler	Yarn
Material wire insulation	PP
Single wire, color	brown, blue, white/orange, white/green, green, orange
Type of pair shielding	Tinned copper braided shield, 95 % covering
Overall twist	1 star quad and 2 wires with 2 fillers
Max. conductor resistance	77 Ω /m (Data cable)
Insulation resistance	5 G Ω *km (Data cable)
Wave impedance	100 Ω \pm 15 %
Working capacitance	50 nF (Data cable)
Nominal voltage, cable	125 V (Data cable)
	48 V (Power supply)
Test voltage	2000 V (Power supply)
	max. 700 V AC (Data cable)
Smallest bending radius, fixed installation	\geq 93 mm
Smallest bending radius, movable installation	\geq 93 mm
Max. bending cycles	3000000
Halogen-free	in accordance with DIN EN 50267-2-1
Ambient temperature (operation)	-20 °C ... 80 °C (Cable)
Ambient temperature (installation)	0 °C ... 50 °C


Environmental and real-life conditions

Ambient conditions


Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)

Drawings

Circuit diagram

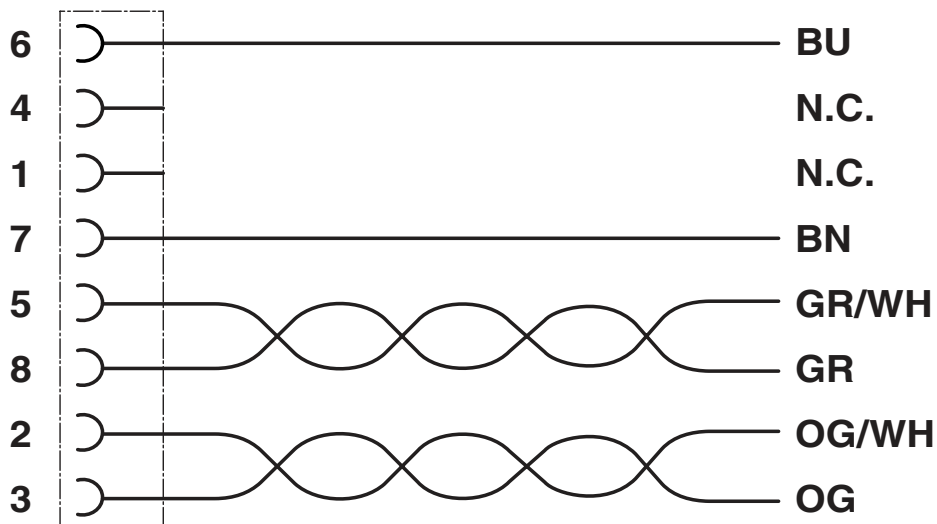

Schematic diagram

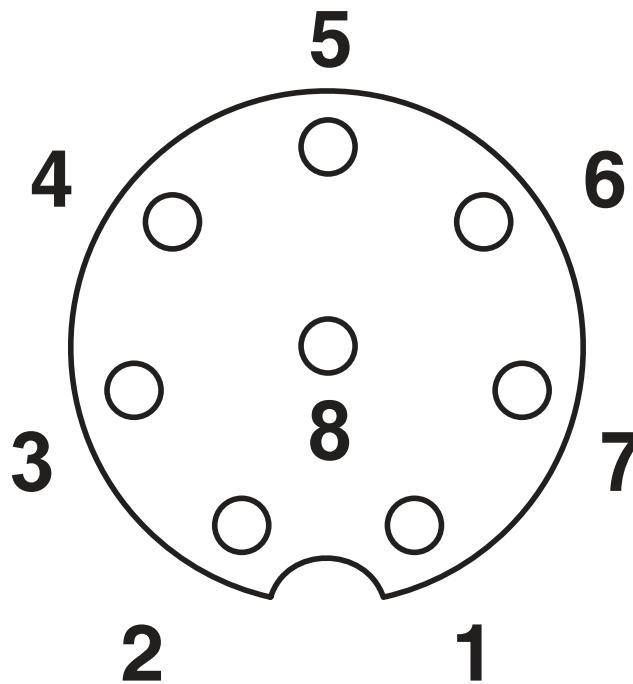


Pin assignment M12 socket, 8-pos., A-coded, view female side

SAC-6P-15,0-970/FS SCO - Bus system cable

1428607

<https://www.phoenixcontact.com/us/products/1428607>

Dimensional drawing

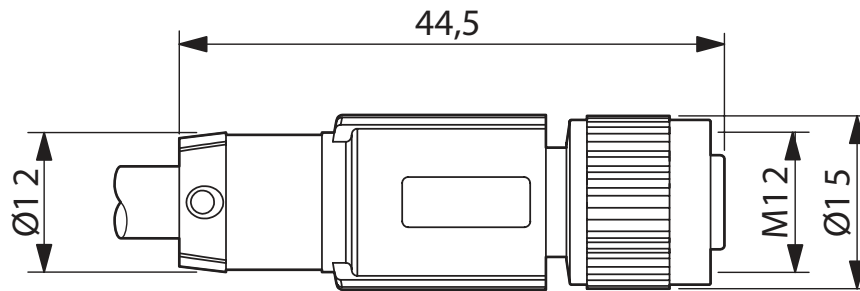

M12 x 1 socket, straight, shielded

SAC-6P-15,0-970/FS SCO - Bus system cable



1428607

<https://www.phoenixcontact.com/us/products/1428607>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1428607>



EAC

Approval ID: RU C-DE.BL08.B.00286



EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387

SAC-6P-15,0-970/FS SCO - Bus system cable



1428607

<https://www.phoenixcontact.com/us/products/1428607>

Classifications

ECLASS

ECLASS-11.0	27060307
ECLASS-12.0	27060307
ECLASS-13.0	27060307

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-6P-15,0-970/FS SCO - Bus system cable



1428607

<https://www.phoenixcontact.com/us/products/1428607>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com