

Molded Type Power Inductor



ASPI-0530HI Series

Request Samples



Check Inventory



5.7 x 5.3 x 3.0 mm
RoHS/RoHS II Compliant
MSL Level = 1

Features

- High saturation current.
- Low loss due to low DC resistance.
- Frequency application up to 3MHz.
- Low profile with max thickness 3.0mm.
- 100% lead free and RoHS compliant.
- Suitable for reflow soldering.
- High reliable SMD package

Applications

- DC/DC converters in Notebook, Netbook, desktop, and server
- Low profile, high current power supplies.

Electrical Specifications

Part Number	Inductance	Tolerance	DCR Typ	DCR Max	Saturation Current	Temperature Rise Current
Units	μH	%	m Ω	m Ω	A	A
Symbol	L	M			Isat*	Irms*
ASPI-0530HI-R22	0.22	M	4.0	5.0	23.0	15.0
ASPI-0530HI-R33	0.33	M	5.0	6.0	20.0	12.0
ASPI-0530HI-R47	0.47	M	6.3	7.4	18.0	13.0
ASPI-0530HI-R68	0.68	M	9.1	10.0	14.0	10.0
ASPI-0530HI-1R0	1.0	M	13.0	14.0	11.0	7.0
ASPI-0530HI-1R5	1.5	M	20.0	25.0	10.0	6.0
ASPI-0530HI-2R2	2.2	M	29.0	35.0	9.0	5.5
ASPI-0530HI-3R3	3.3	M	34.0	38.0	8.0	5.0
ASPI-0530HI-4R7	4.7	M	54.0	60.0	4.5	4.5
ASPI-0530HI-5R6	5.6	M	55.0	65.0	4.0	4.5
ASPI-0530HI-6R8	6.8	M	65.0	76.5	4.0	3.8
ASPI-0530HI-100	10.0	M	104	120	3.5	3.2

Test Conditions

1. Inductance is measured in HP-4284A Precision LCR Meter.
2. RDC is measured in HP-4338B milli ohm meter. (Or equivalent).
3. Isat: Based on inductance change ($\Delta L/L_0 \leq -20\%$)
4. Irms: Based on temperature rise ($\Delta T: 40^\circ\text{C TYP.}$)

Operating Temperature & Humidity: -55°C to $+125^\circ\text{C}$ (Including self-generated heat)

Storage Temperature & Humidity: $+25^\circ\text{C}$ to $+35^\circ\text{C}$, 45% to 75% RH

Maximum Voltage: 30VDC




5101 Hidden Creek Ln, Spicewood TX 78669
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION C : 10/24/2022

ABRACON IS
ISO9001-2015
CERTIFIED

Molded Type Power Inductor



ASPI-0530HI Series

Request Samples




Check Inventory




5.7 x 5.3 x 3.0 mm
RoHS/RoHS II Compliant
MSL Level = 1

Performance Graphs


ASPI-0530HI-R22

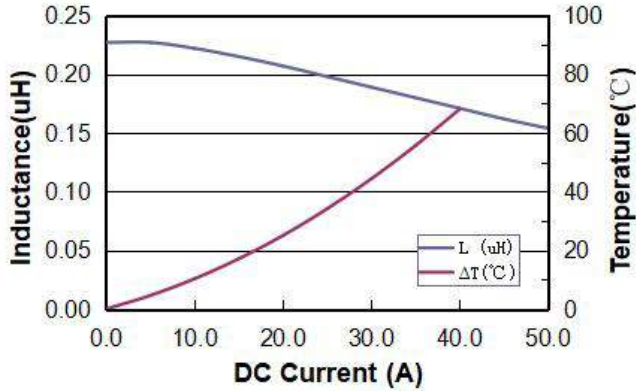


ASPI-0530HI-R33

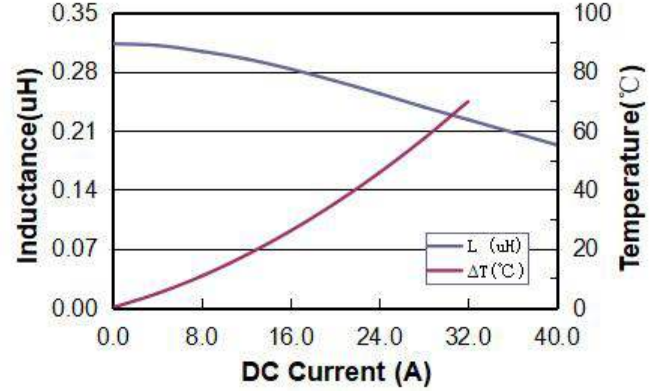


ASPI-0530HI-R47

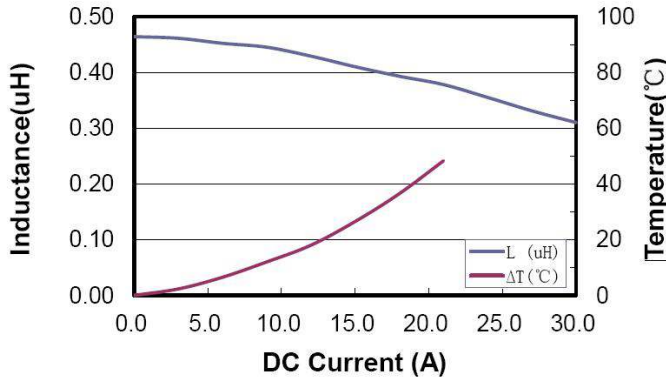


ASPI-0530HI-R68

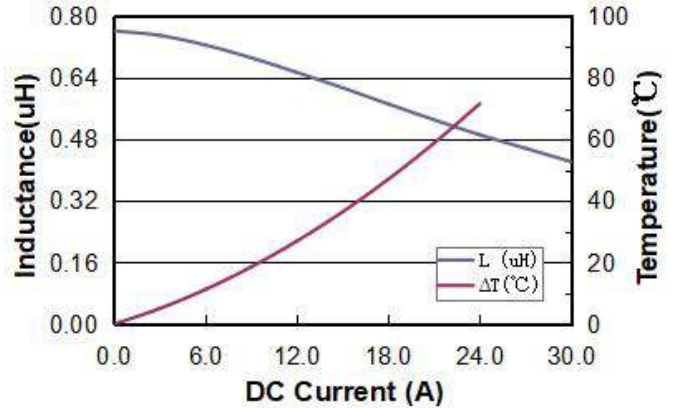

ASPI-0530HI-1R0

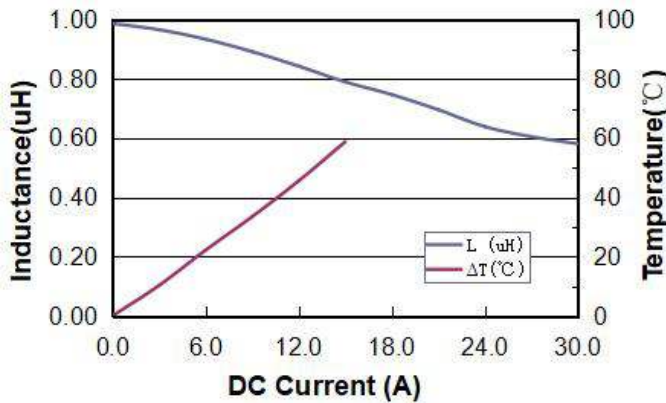

ASPI-0530HI-1R5

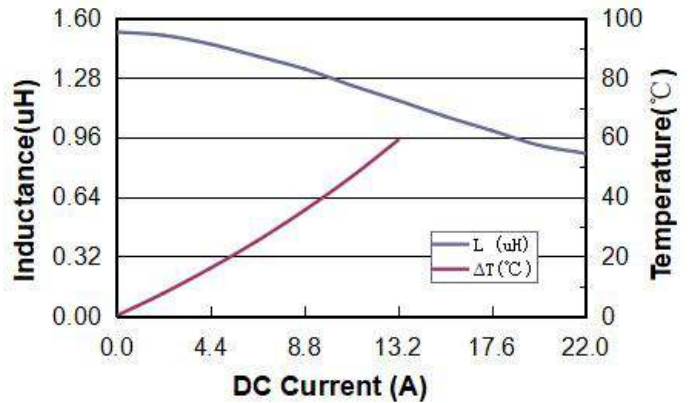

5101 Hidden Creek Ln, Spicewood TX 78669
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION C : 10/24/2022

ABRACON IS
ISO9001-2015
CERTIFIED

Molded Type Power Inductor



ASPI-0530HI Series

Request Samples




Check Inventory




5.7 x 5.3 x 3.0 mm
RoHS/RoHS II Compliant
 MSL Level = 1

Performance Graphs


ASPI-0530HI-2R2

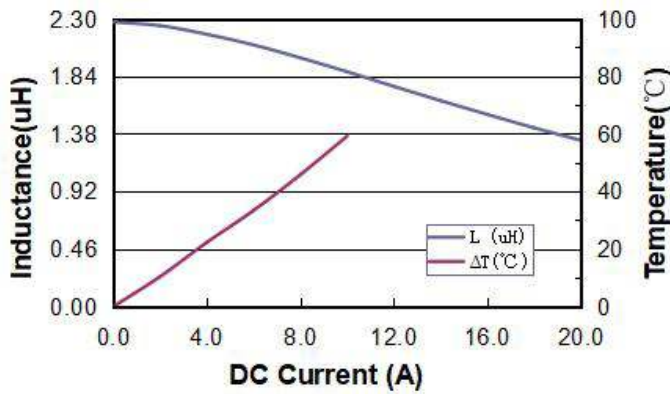


ASPI-0530HI-3R3

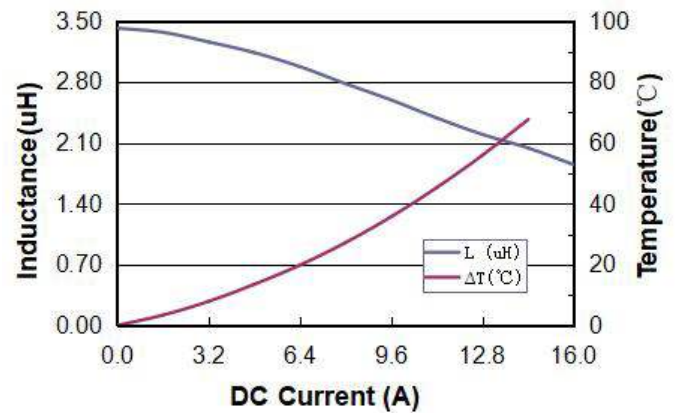


ASPI-0530HI-4R7

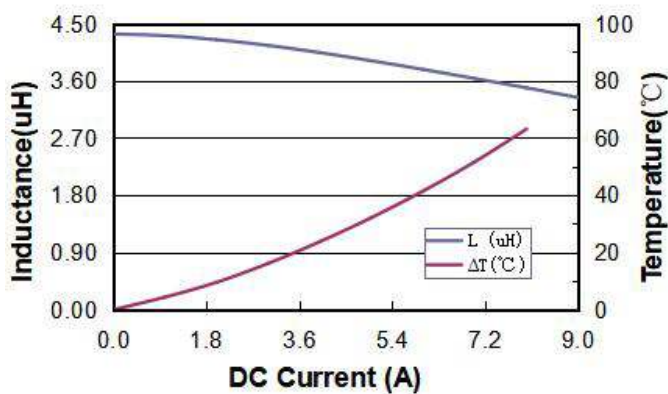


ASPI-0530HI-5R6

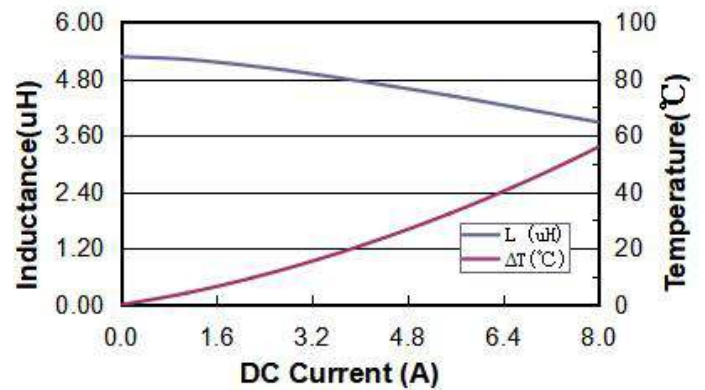

ASPI-0530HI-6R8

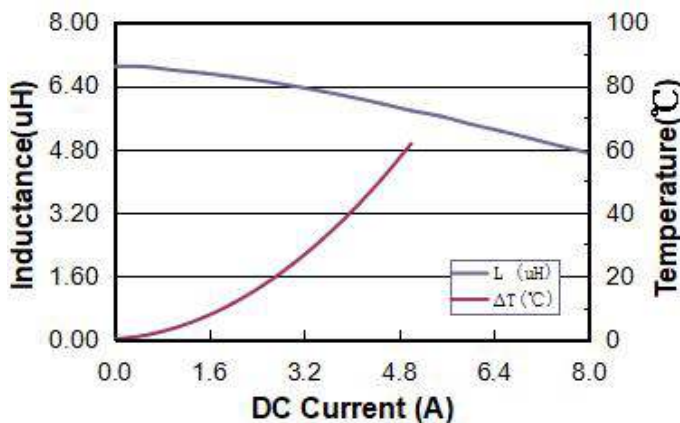

ASPI-0530HI-100

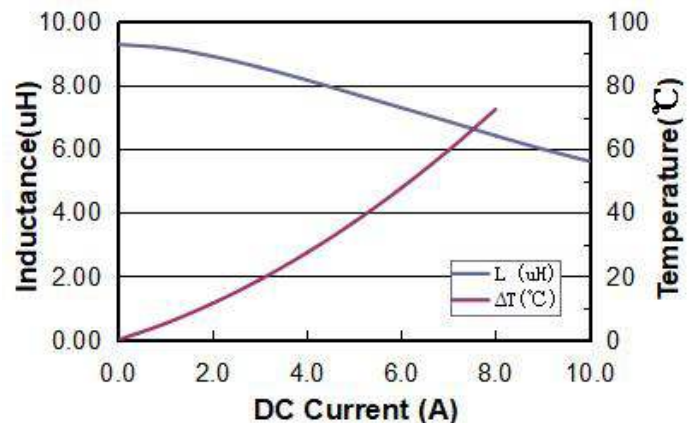

5101 Hidden Creek Ln, Spicewood TX 78669
 Phone: 512-371-6159 Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISION C : 10/24/2022

ABRACON IS
 ISO9001-2015
 CERTIFIED

Molded Type Power Inductor



ASPI-0530HI Series

Request Samples



Check Inventory




5.7 x 5.3 x 3.0 mm
RoHS/RoHS II Compliant
 MSL Level = 1

Mechanical Specifications



A	B	C	D	E
5.7 ±0.30	5.3 ±0.40	3.0 MAX	2.2 ±0.5	1.2 ±0.50

Recommended Land Pattern

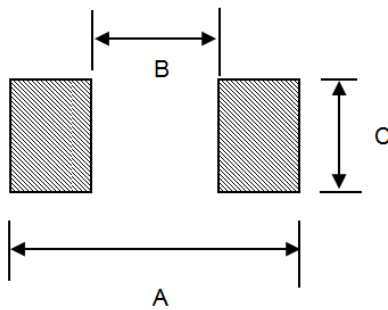

A	B	C
7.0 Typ.	3.0 Typ.	2.5 Typ.

Dimensions: mm

Part Number Identification

ASPI-0530HI - -

Inductance Code
 Please refer to the
 Electrical
 Specifications Table

Tolerance
 M: ±20%

Packaging
 T2: Tape & Reel 2,000 units



5101 Hidden Creek Ln, Spicewood TX 78669
 Phone: 512-371-6159 Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISION C : 10/24/2022

ABRACON IS
 ISO9001-2015
 CERTIFIED

Molded Type Power Inductor



ASPI-0530HI Series

Request Samples




Check Inventory



5.7 x 5.3 x 3.0 mm
RoHS/RoHS II Compliant
MSL Level = 1

Reflow Profile

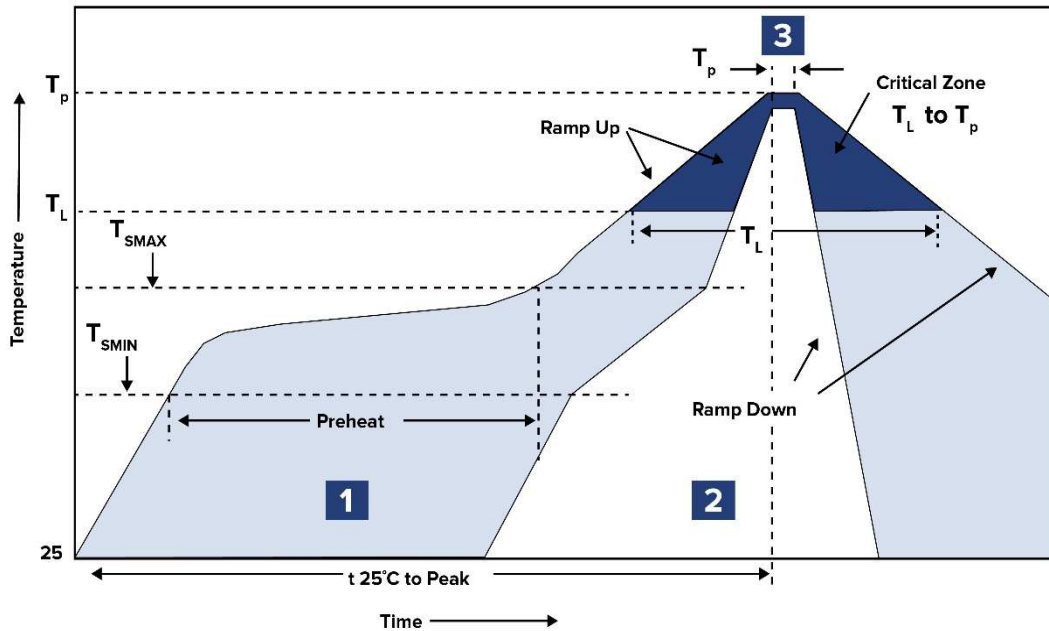

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 200°C	60 ~ 120 sec.
2	Reflow	T_L 200°C	20 sec.
3	Peak heat	T_P 250°C	3 sec. MAX

Molded Type Power Inductor



ASPI-0530HI Series

Request Samples




Check Inventory






5.7 x 5.3 x 3.0 mm
RoHS/RoHS II Compliant
 MSL Level = 1

Packaging

T2: 2,000pcs / reel

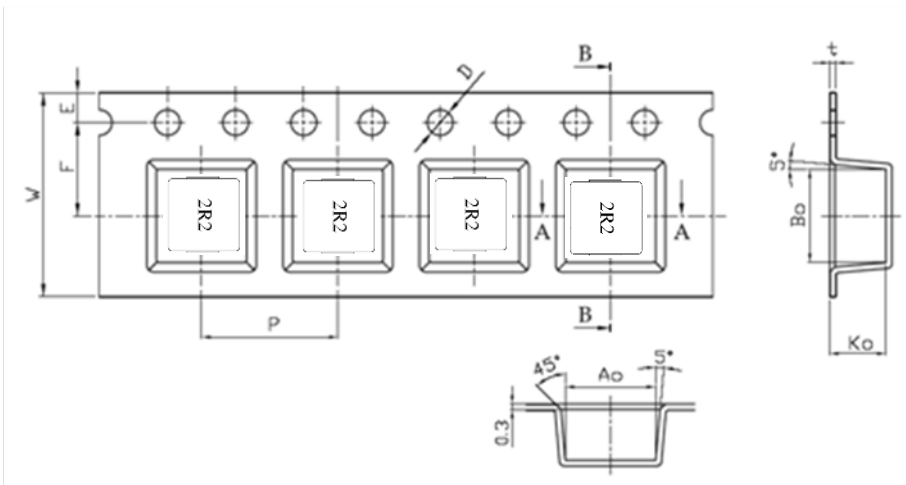

A0	5.7 ±0.3
B0	5.9 ±0.3
K0	3.4 ±0.3
P	8.0 ±0.1
t	0.4 Typ
W	12 ±0.3
E	1.75 ±0.1
F	5.5 ±0.1
D	1.5 ±0.1
H	12.5

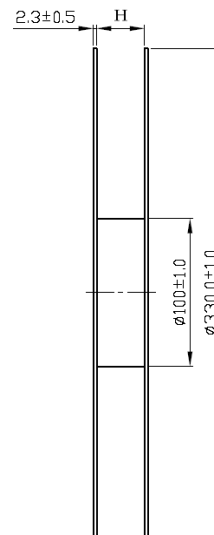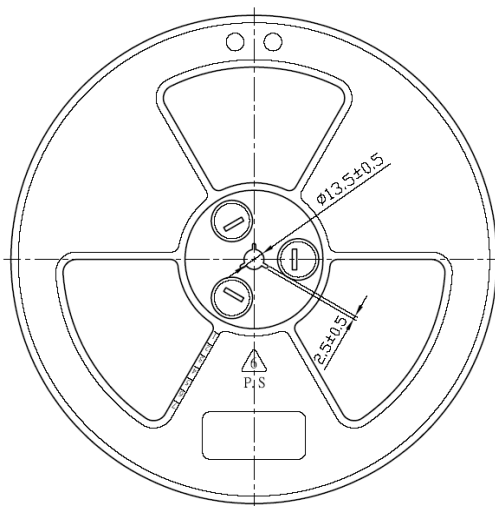

Dimension: mm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln, Spicewood TX 78669
 Phone: 512-371-6159 Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISION C : 10/24/2022

ABRACON IS
 ISO9001-2015
 CERTIFIED