


MATERIAL&FINISH  
 insulator:PBT Glass Fiber  
 (UL94V-0)BLAKE

Contact:Brass  
 Contact:Gold Plated Over Nicked  
 SPECIFICATIONS

Current Rating:1A AC,DC  
 Voltage Rating:250V AC,DC  
 Temperature Range:-40°Cto+105°C  
 Contact Resistance:1000MΩ Min  
 Withstanding Voltage:500V AC/Min

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	5.08	12.32
08	7.62	14.86
10	10.16	17.40
12	12.7	19.94
14	15.24	22.48
16	17.78	25.02
18	20.32	27.56
20	22.86	30.10
24	27.94	35.18
26	30.48	37.72
28	33.02	40.26
30	35.56	42.80
34	40.64	47.88
40	48.26	55.5
44	53.34	60.85
50	60.96	68.20
60	73.66	80.90
64	78.74	85.98

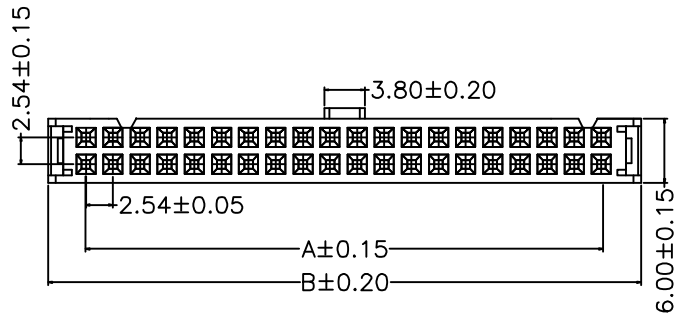

UNLESS OTHERWISE SPECIFIED  
 TOLERANCE :  
 X. ±0.20 ANGLES : ±2'  
 X.X ±0.15  
 X.XX ±0.10 DO NOT SCALE DRAWING

**CnC Tech, LLC**  
 Industrial Cable and Connector Technology

PART NO. 3030-01-XX-0304

DRAWN BY		SIZE A	UNIT MM	TITLE	REV
CHECKED BY		SCALE		<b>2.54/DC</b>	<b>B0</b>
APPROVED BY	F:\LTU\lmp	THIRD ANGLE PROJECTION		PAGE	1 OF 1
DWG NO.		ITEM NO.		DATE	2005/07/17