



NEW



CPB2 Series Waterproof Connector

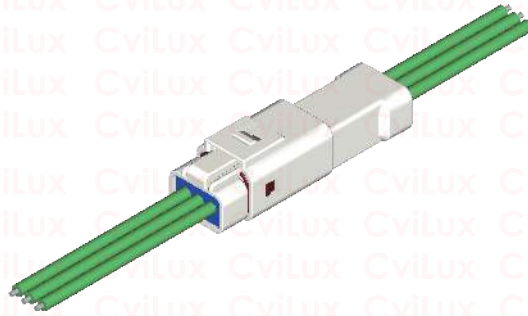

Series	Picture	Pitch	Row	PIN	Wire Range	Current Rating	IP
CPB2		2.00 mm	Single Row	02, 03, 04	AWG #22~#26	1A~3A	IPX7
			Dual Row	06, 08			

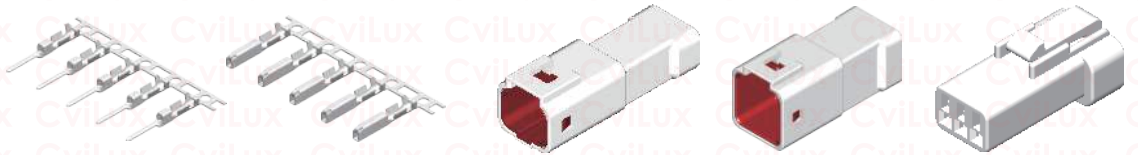


CPB2 2.00mm Wire to Wire Waterproof Connector

瀚荃集團
CviLux Group
Since 1990

Picture	Specification	Materials	Plating	CviLux PN
	Receptacle Housing No. of circuits: Single Row: 02, 03, 04 Dual Row: 06, 08	Housing: PBT, UL 94V-0 Rubber Seal: Silicone Rubber	—	CPB202S0R00 CPB203S0R00 CPB204S0R00 CPB206SDR00 CPB208SDR00
	Female Crimp Terminal Wire gauge: AWG #22, #24, #26	Copper alloy	Tin-Plated	CPB2T021PES
	Plug Housing No. of circuits: Single Row: 02, 03, 04 Dual Row: 06, 08	Housing: PBT, UL 94V-0 Rubber Seal: Silicone Rubber		CPB202P0R00 CPB203P0R00 CPB204P0R00 CPB206PDR00 CPB208PDR00
	Male Crimp Terminal Wire gauge: AWG #22, #24, #26	Copper alloy	Tin-Plated	CPB2T021BPP

CPB2 Series Waterproof Connector

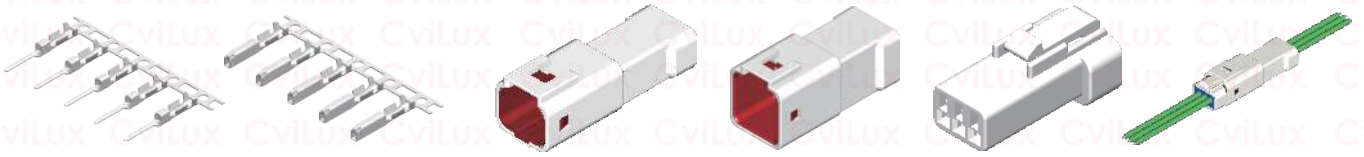


CPB2 series connector can be placed on the devices which is specially waterproof required, for example, outdoor lighting, lawn mower... and so on.



Positive Locking System




High Reliability



Wire to Wire connection



IPx7 Rating performance




Inner Seal Ring



Rubber Seal

瀚荃集團
CviLux Group
Since 1990

Application

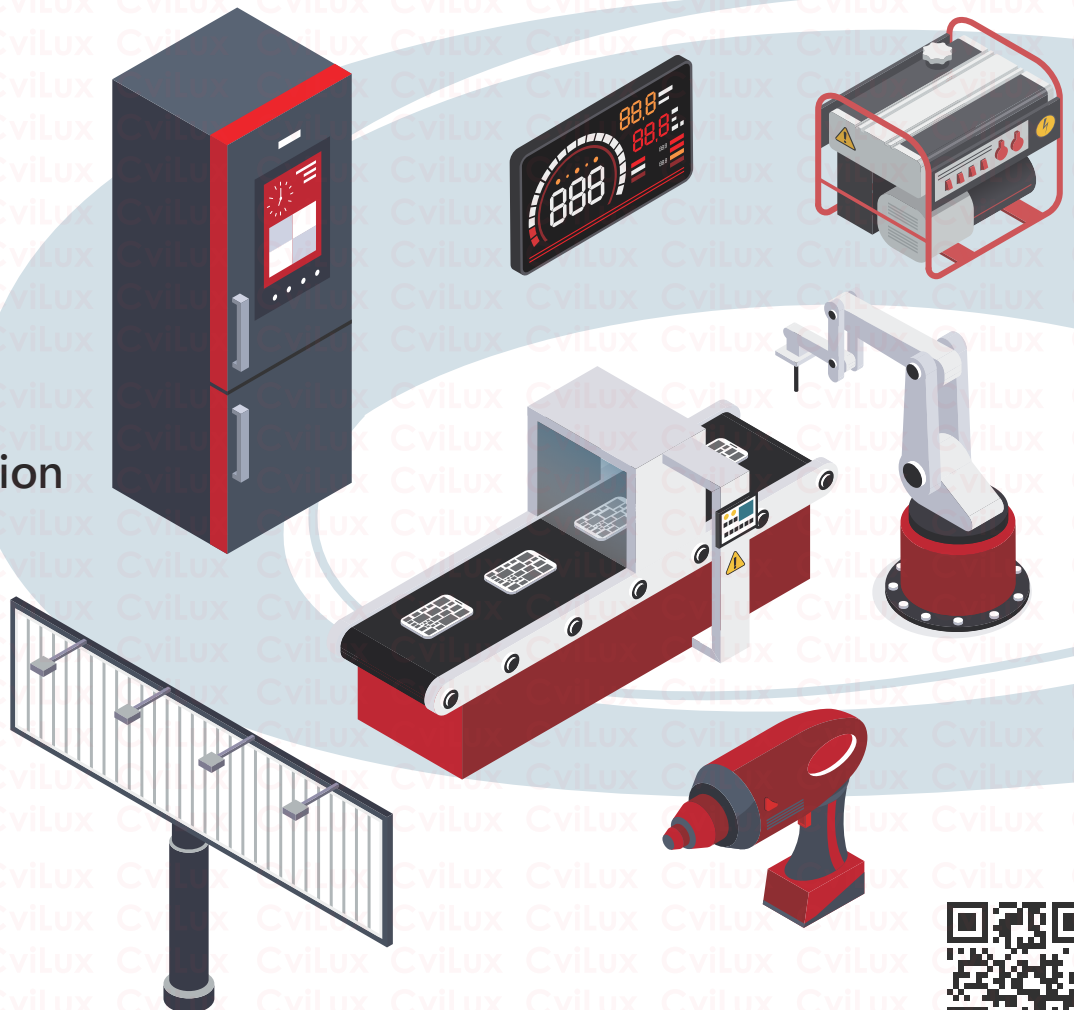

Connect the World, Connect the Future.