




UNIT: mm

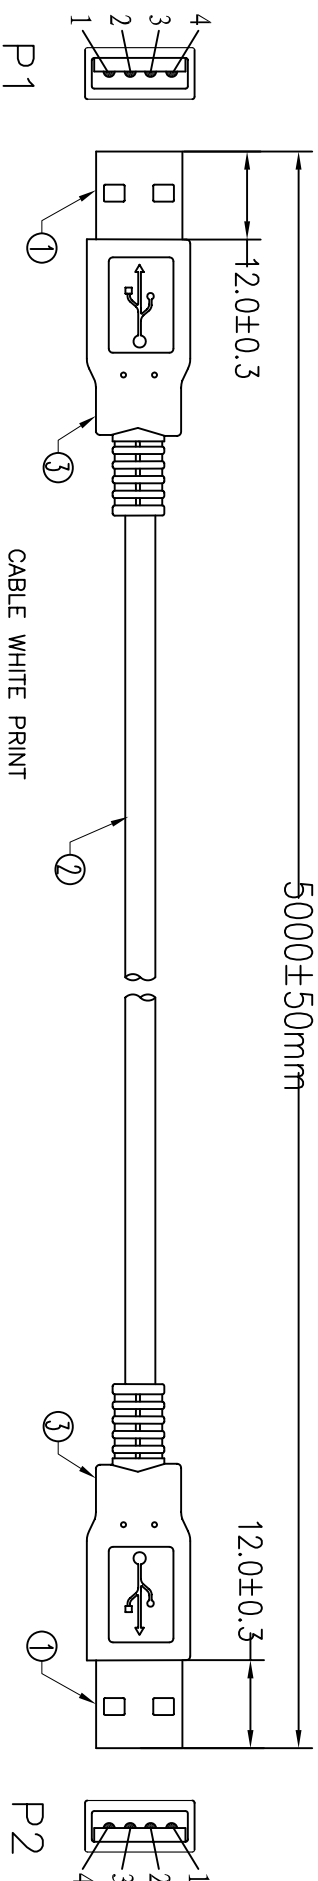

PIN ASSIGNMENT:

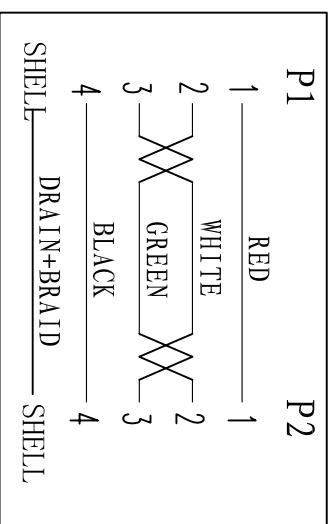

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

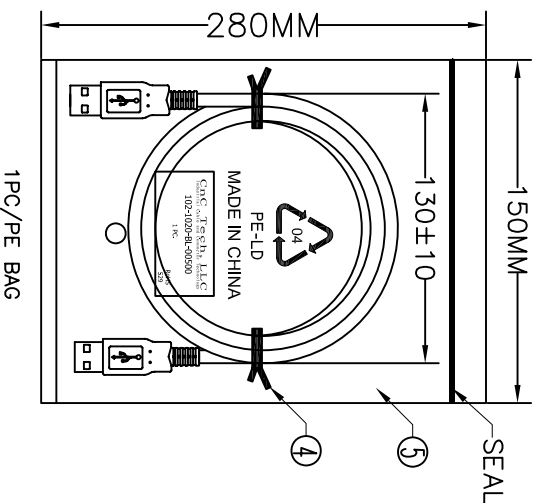

CABLE WHITE PRINT
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+24AWG/2C
 E189529 **PA** AWM STYLE 2725 80°C 30V VW-1 VEGA TECH

⑥	PE BAG	1/5	CLEAR SIZE: 360*380*0.05mm	PRINT BLACK	MADE IN CHINA	“+” 5PCS	印生产周期, 有透气孔.
⑤	PE BAG	1	CLEAR SIZE: 150*280*0.05mm	PRINT BLACK	MADE IN CHINA	“+” 1PC	印生产周期, 有透气孔.
④	TIE	2	BLACK L=120mm				
③	OUT JACKET	12g	BLACK PVC-45P (MOULD NO.: WM-40)				
②	CABLE	1	BLACK USB2.0 UL2725 28#/1P+24#/2C+ABR OD: 4.7mm L=5000±20				
①	CONN	2set	USB A MALE SHELL-NICKEL PIN G/F INSULATION COLOR WHITE 3PCS TYPE				
NO.	NAME	Q'TY	SPECIFICATION				

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	Andy	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1020-BL-00500
DECIDED		DATE	2013-8-23
VERSIONS/EDITION	A/0	PROJECTION	