


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/30/17	G	ADDED DIM. Ø2.54	T.B.	B.S.	
07/22/17	H	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	
03/26/19	J	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
05/30/19	K	DIM. 5.40 WAS 3.18	T.B.	B.S.	

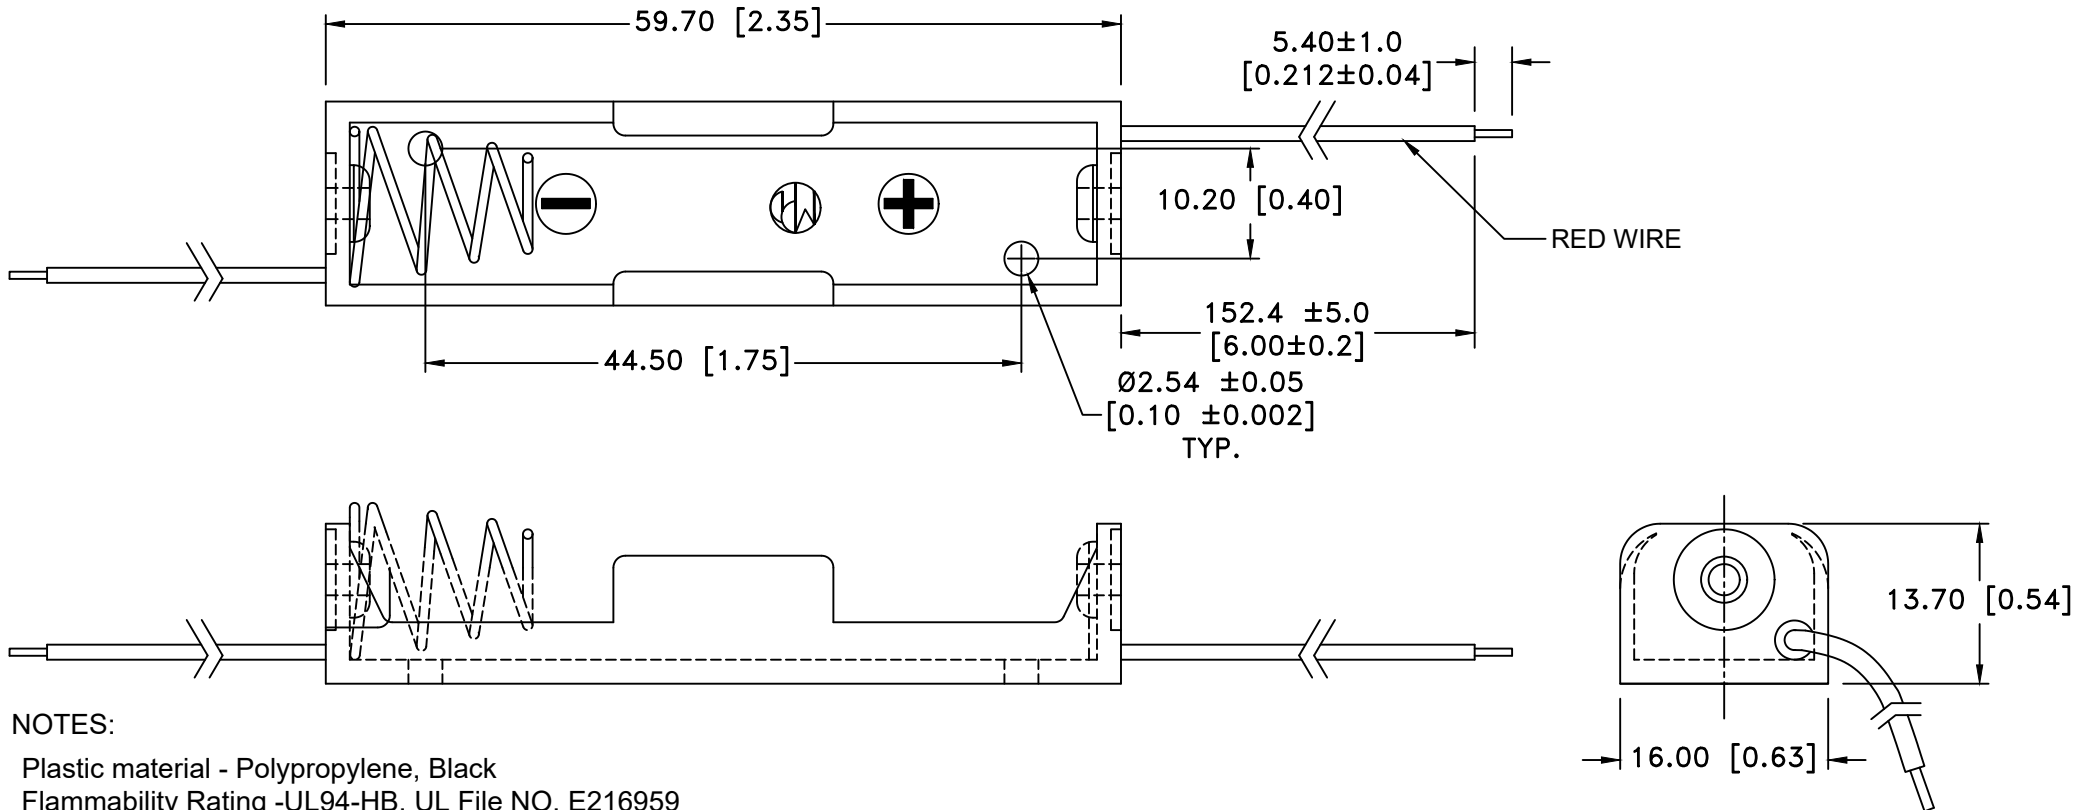


**NOTES:**

- Plastic material - Polypropylene, Black
- Flammability Rating -UL94-HB, UL File NO. E216959
- Temperature Range: -10°C to +100°C
- Springs - Nickel Plated Spring Steel
- Rivets - Brass, Nickel Plated
- Wires - 26 AWG, UL1007, CSA -TR-64, 300V, 80°C
- Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS COMPLIANT

**Mounting Instruction:**

Use 2-56 machine screws or eyelets 0.089" OD by 0.15" flange stimpson GS-3 series or equivalent. also adhesives and double sided tapes work well.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title ONE "AA" CELL HOLDER WITH WIRE LEADS		
Fractional ± .8 (.030)	Date 05/30/19	Drawing Number BCAAW	
Angular ± 3°			