
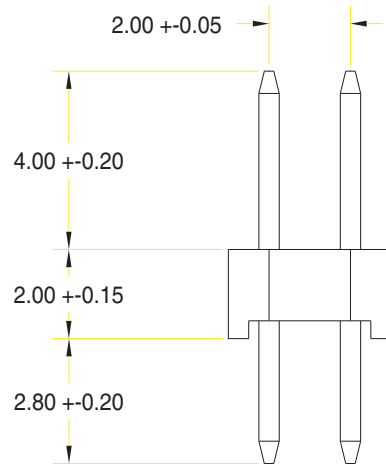
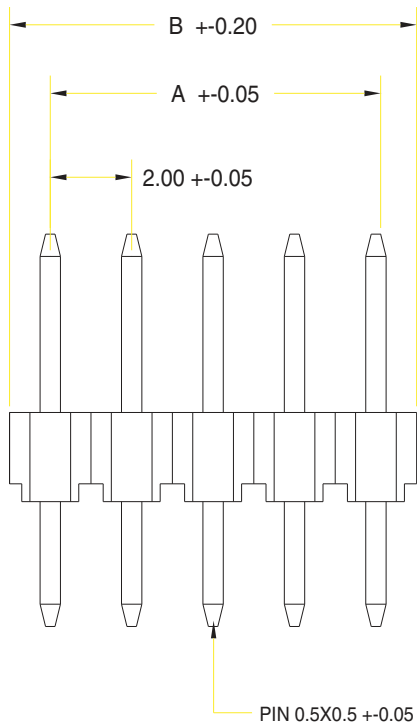


No. of Contacts	DIMENSIONS	
	A	B
4	2.00	4.00
6	4.00	6.00
8	6.00	8.00
10	8.00	10.00
12	10.00	12.00
14	12.00	14.00
16	14.00	16.00
18	16.00	18.00
20	18.00	20.00
22	20.00	22.00
24	22.00	24.00
26	24.00	26.00
28	26.00	28.00
30	28.00	30.00
32	30.00	32.00
34	32.00	34.00
36	34.00	36.00
38	36.00	38.00
40	38.00	40.00
42	40.00	42.00
44	42.00	44.00
46	44.00	46.00
48	46.00	48.00
50	48.00	50.00
52	50.00	52.00
54	52.00	54.00
56	54.00	56.00
58	56.00	58.00
60	58.00	60.00
62	60.00	62.00
64	62.00	64.00
66	64.00	66.00
68	66.00	68.00
70	68.00	70.00
72	70.00	72.00
74	72.00	74.00
76	74.00	76.00
78	76.00	78.00
80	78.00	80.00
-ΥμρΑ PIN	DIM. B	+0.50

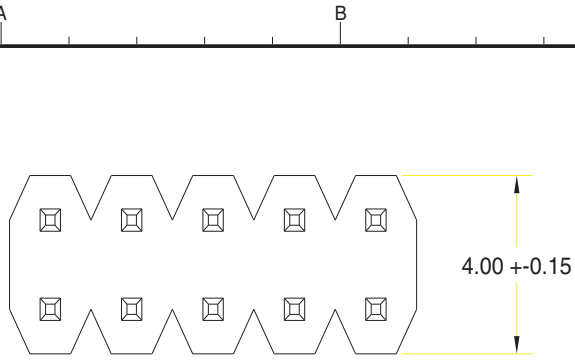

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohm Min.
 Dielectric withstanding: 500 VAC
 Operating Temperature: -40 Degrees C. to +105 Degrees C.
 Contact Material: Brass or Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: P.B.T
 Contact Finish: Gold/Tin, Selective Plating

Note that "xx" in part number designates number of dual positions, not total contacts.

SULLINS 801 E. MISSION RD. SAN MARCOS, CA 92069	GENERAL TOLERANCE		SCALE	NTS	DRAWN	DATE 04.18.2000	DWG. NO.	T0030	TITLE	REV.
	XX. +-	XXX. +-	UNIT	MM	CHECK	DATE	PARTS NO.	PRPNxx2PAEN		SHEET
	X. +- 0.20	.XXX +-	SIZE		APPROVE	DATE				
	.X +- 0.10	X.B +-								
.XX +- 0.05	.XB +-									