

Printed-circuit board connector - CC 2,5/ 2-GF-5,08-LR P26THR - 1792627

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 2, Pitch: 5.08 mm, Color: Black, Contact surface: Tin, Assembly: SMD/THT/THR



Why buy this product

- Standard pin length of 2.6 mm, other pin lengths available on request
- Plug-in direction parallel to the PCB
- Delivery form: box packaging, in bulk for small series
- Use in SMT reflow processes

Key commercial data

| | |
|------------------------|---|
| Packing unit | 0 |
| Minimum order quantity | 1 |
| Catalog page | Page 273 (CC-2011) |
| GTIN |  4 046356 615631 |
| Custom tariff number | 85366990 |
| Country of origin | GERMANY |

Technical data

Dimensions / positions

| | |
|---------------------|----------|
| Length | 12 mm |
| Height | 11.2 mm |
| Pitch | 5.08 mm |
| Dimension a | 5.08 mm |
| Number of positions | 2 |
| Pin dimensions | 1 x 1 mm |
| Hole diameter | 1.6 mm |

Technical data

| | |
|-----------------------------|-----------------|
| Range of articles | CC 2,5/..-GF-LR |
| Insulating material group | IIIa |
| Rated surge voltage (III/3) | 4 kV |
| Rated surge voltage (III/2) | 4 kV |

Printed-circuit board connector - CC 2,5/ 2-GF-5,08-LR P26THR - 1792627

Technical data

Technical data

| | |
|---|--------|
| Rated surge voltage (II/2) | 4 kV |
| Rated voltage (III/2) | 320 V |
| Rated voltage (II/2) | 400 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I _N | 12 A |
| Nominal voltage U _N | 250 V |
| Insulating material | LCP |
| Inflammability class according to UL 94 | V0 |
| Color | Black |

Classifications

eclass

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |

etim

| | |
|----------|----------|
| ETIM 4.0 | EC002637 |
|----------|----------|

unspsc

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11 | 39121409 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121409 |

Approvals

Certificates

Certification

GOST

Certification EX

Certification submitted

Printed-circuit board connector - CC 2,5/ 2-GF-5,08-LR P26THR - 1792627


Approvals

Approval details


GOST

Drawings

Drilling diagram



Dimensioned drawing

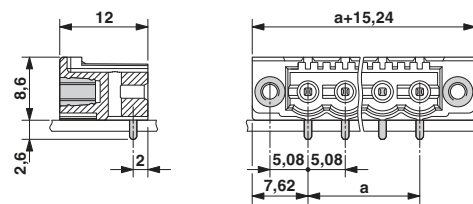

Schematic diagram

