

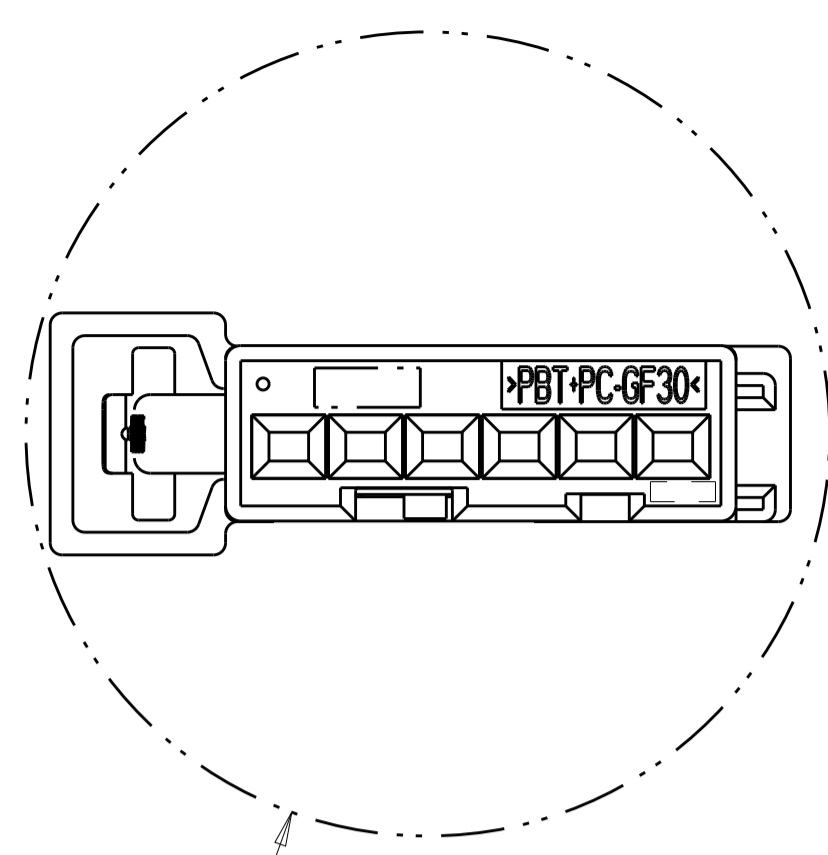
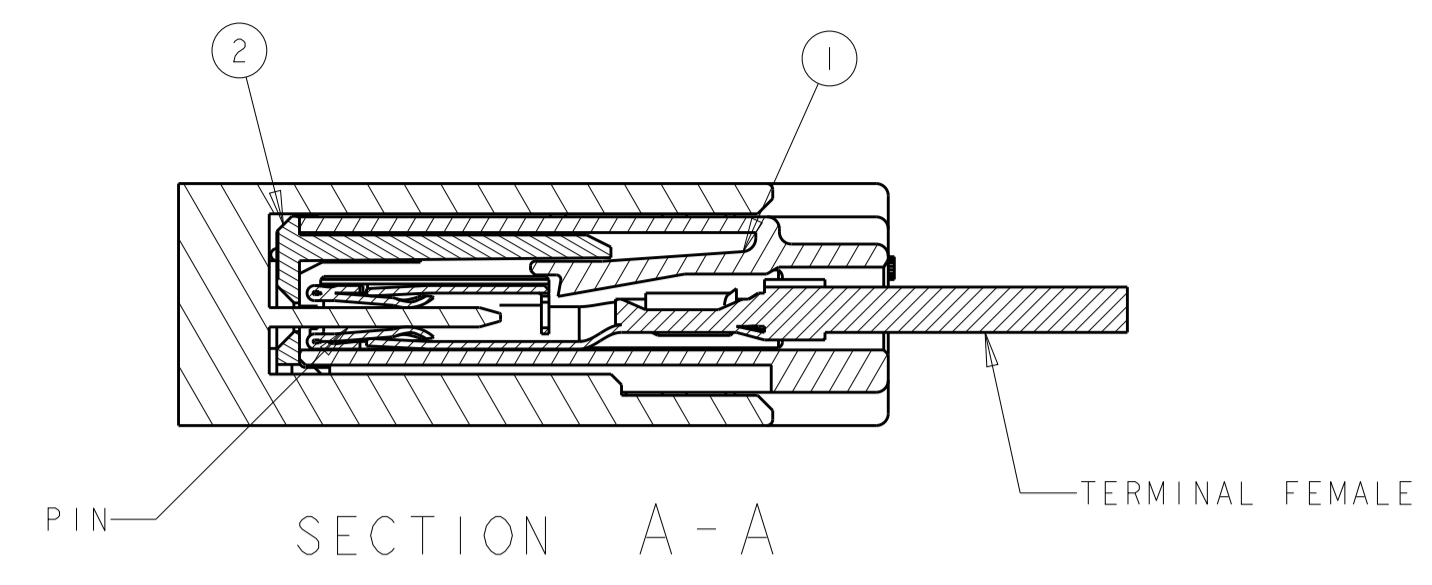
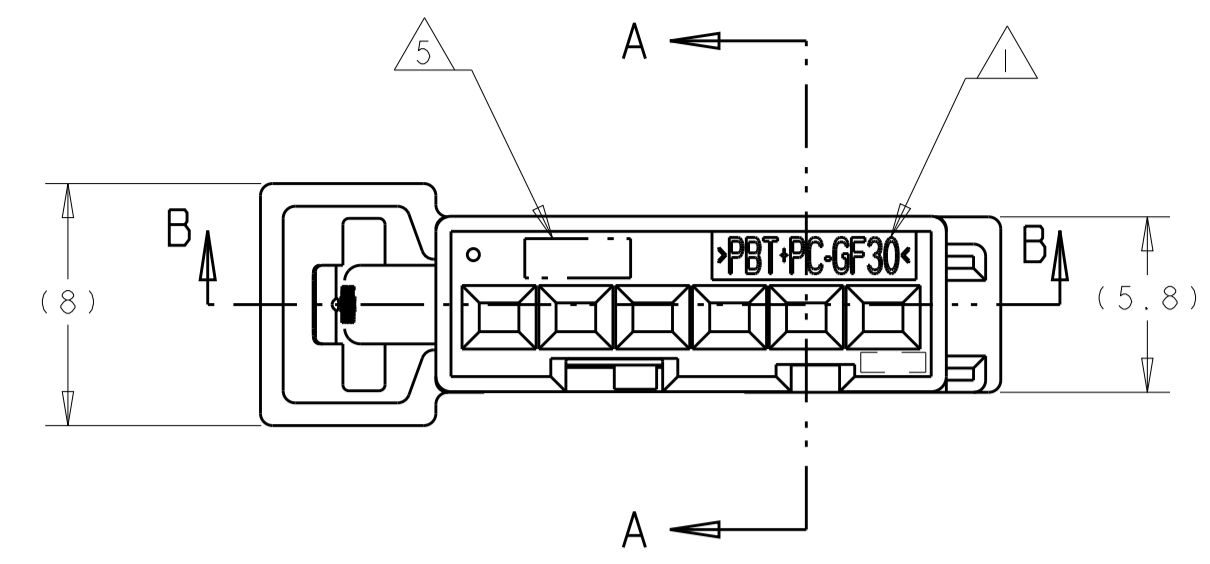








REVISIONS				
P.	LTN	DESCRIPTION	DATE	DWN APVD
A		RELEASED PER ECO-14-010938	18JUL2014	DD RL
A1		REVISED PER ECO-16-013871	21SEP2016	DD RL

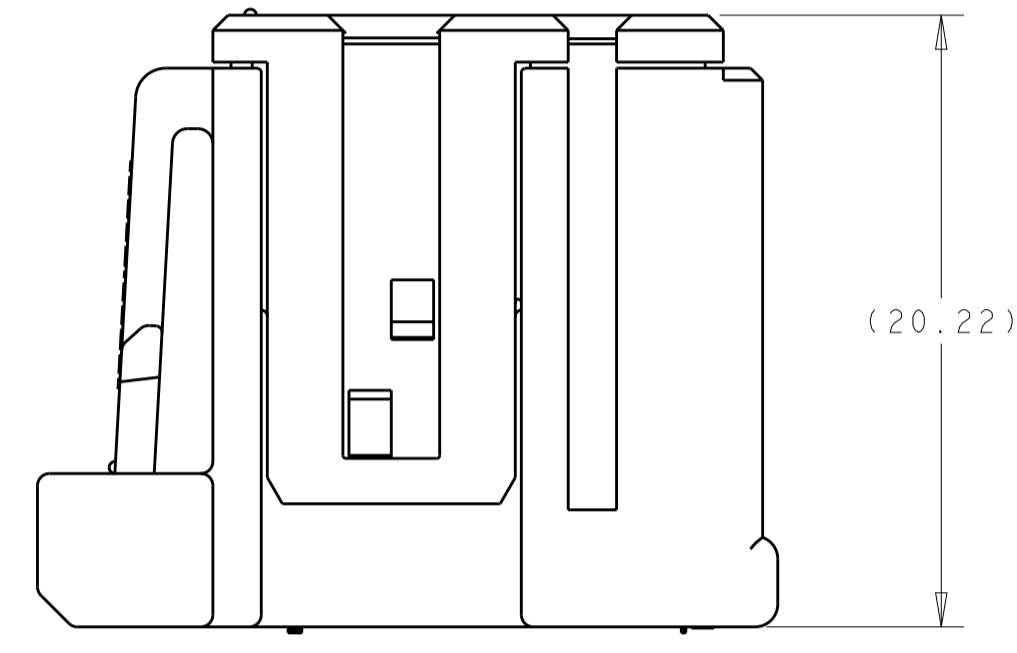





- △ MATERIAL IDENTIFICATION SYMBOLS.
- 2. 0.2 mm MAXIMUM RADIUS PERMISSIBLE ON EDGES AND FILLETS SHOWN AS SHARP FOR PLASTIC PARTS.
- △ 3. PRODUCTION DATE CODE (YY-DDD-HH) AND ASSEMBLY PART NUMBER APPLIED IN APPROXIMATE LOCATION.
- △ 4. TOOL CAVITY NUMBER
- △ 5. COMPANY LOGO
- △ 6. TERMINAL CAVITY IDENTIFICATION NUMBER.
- 7. FOLLOW TE# 408-32134 FOR PROPER SPACER ENGAGEMENT.

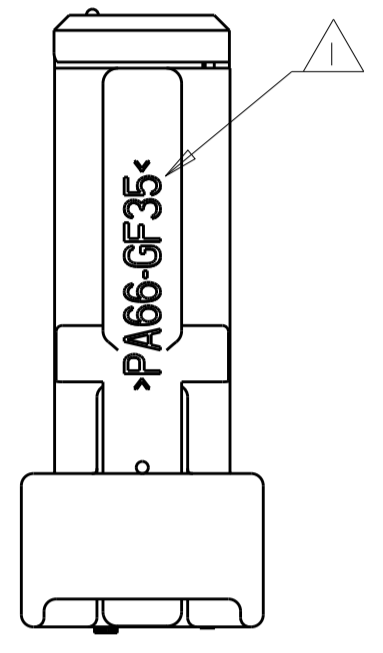

Ø26.58
 MIN FEED THROUGH CONDITION
 (1mm CLEARANCE ALL THE WAY
 AROUND INCLUDED)

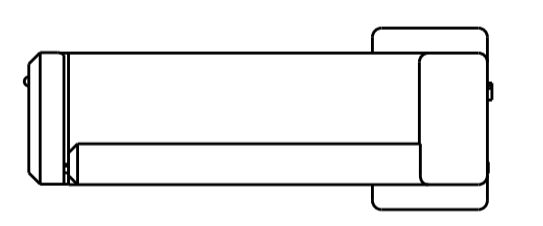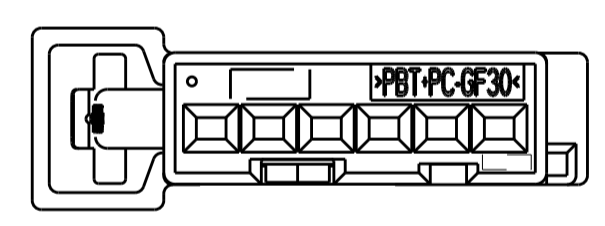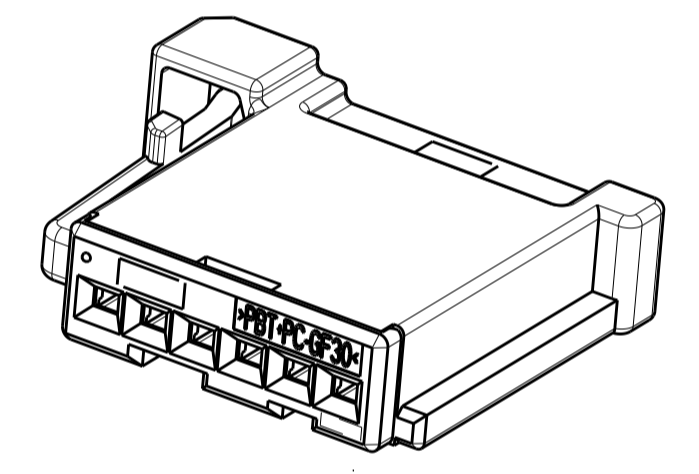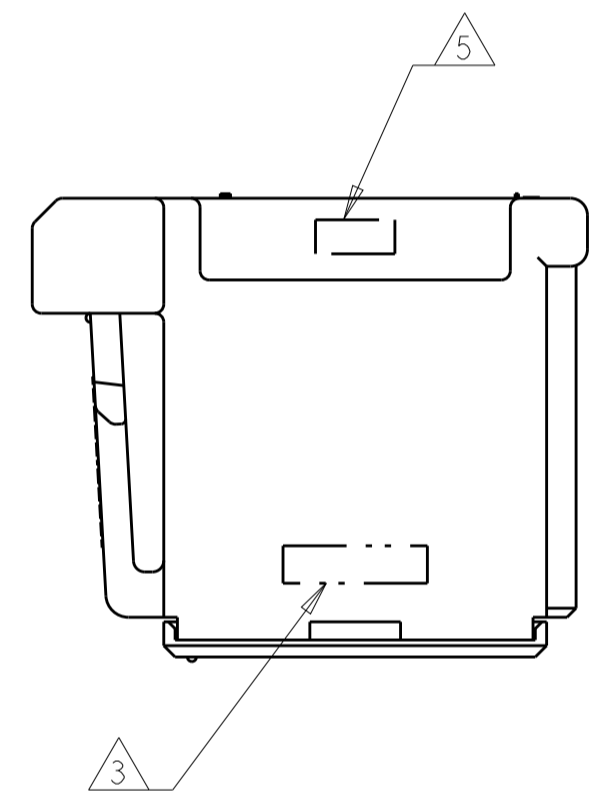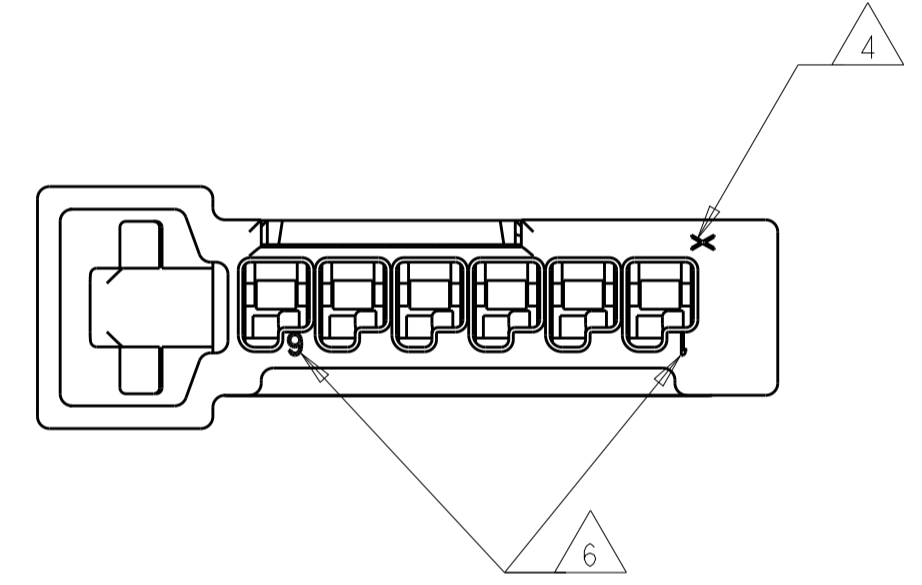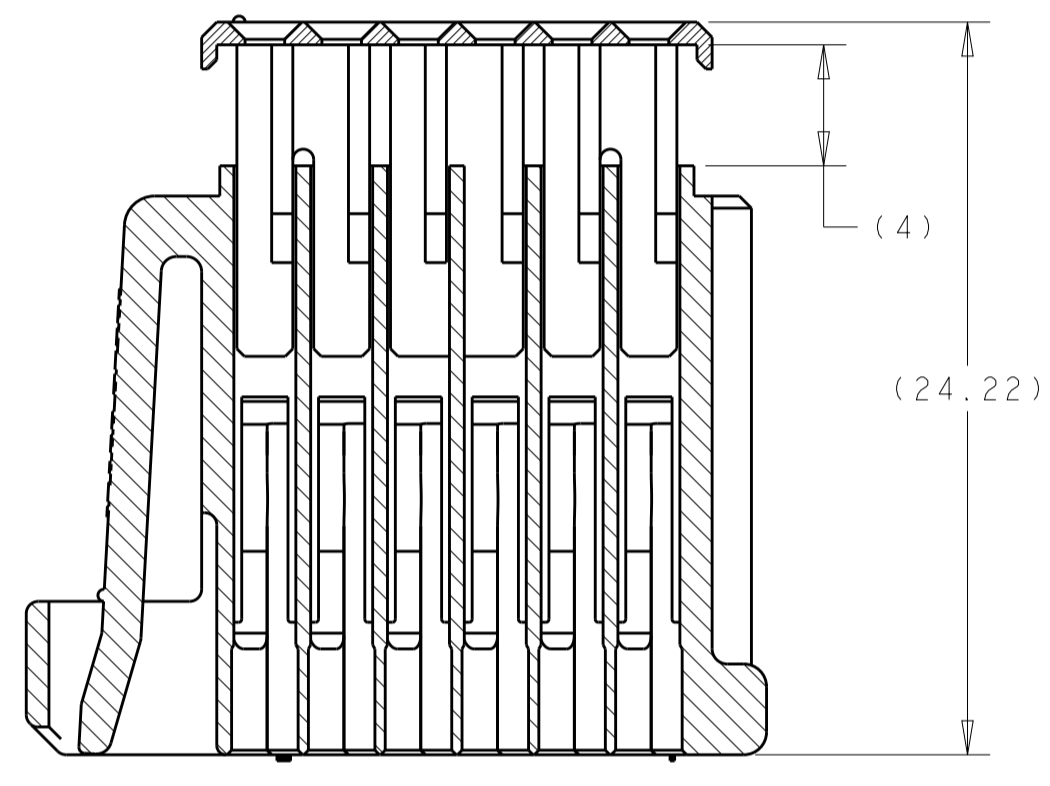

KEYING OPTIONS

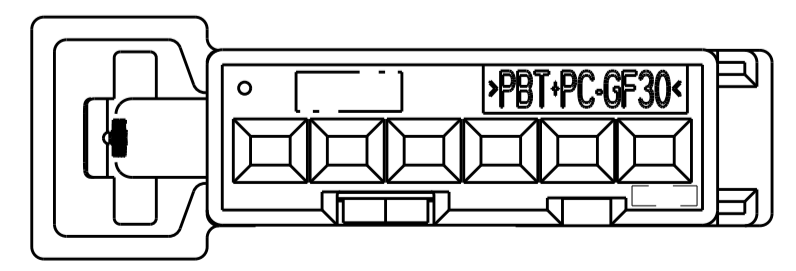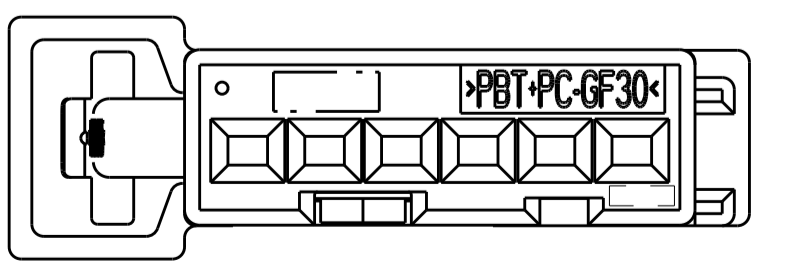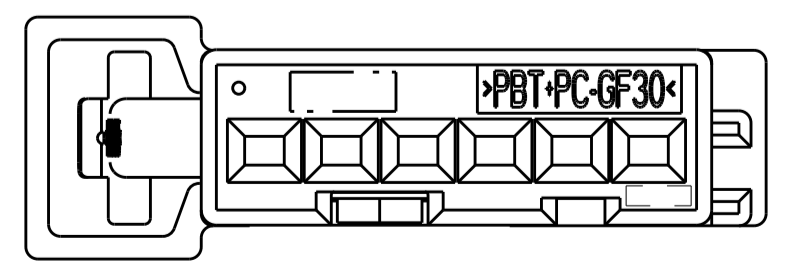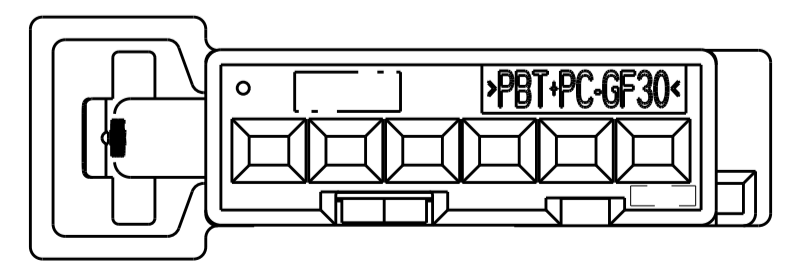

2272431-1

2272431-2

2272431-3

2272431-4

KEYING OPTION "A"

KEYING OPTION "B"

KEYING OPTION "C"

KEYING OPTION "D"

2272431-4	2272431-3	2272431-2	2272431-1	<----- ASSEMBLY PART NUMBER		
				SPACER	>PBT+PC-GF30<	RED 2
				HOUSING, KEY D	>PA66-GF35<	BLACK 1
				HOUSING, KEY C	>PA66-GF35<	BLACK 1
				HOUSING, KEY B	>PA66-GF35<	BLACK 1
				HOUSING, KEY A	>PA66-GF35<	BLACK 1
QTY REQ'D PER ASSY		DESCRIPTION		MATERIAL	COLOR	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. DRUMMOND 02APR2014		TE Connectivity	
DIMENSIONS:		CHK R. LACUESTA 02APR2014			
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		0.25 ± 0.5 ± 1 ± 1.5 ± 2 ± 3 ±		PRODUCT SPEC APPLICATION SPEC SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL		FINISH		WEIGHT A100779C=2272431 CUSTOMER DRAWING	
				SCALE 4:1 SHEET 1 OF 1 REV A1	