


**CK4,0-ED-6,00BU AG**

Order No.: 1663307

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1663307>Turned 4.0 crimp contact, individual female contact, core diameter  
6.00 mm<sup>2</sup>, silver-plated**Commercial data**

GTIN (EAN)	 4 017918 123116
sales group	D090
Pack	25 pcs.
Customs tariff	74152900
Catalog page information	Page 529 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
12/01/2005

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****Electrical characteristics**

Note	For HC-M-3 modules
Volume resistance	≤ 0.003 Ω
Ambient temperature (operation)	-40 °C ... 125 °C

#### Mechanical characteristics

Conductor cross-section	6 mm <sup>2</sup>
Connection cross-section AWG	10
Stripping length of the individual wire	9.6 mm
Insertion/withdrawal cycles	≥ 500

#### General characteristics

Type	Individual female contact
Series	HC-M-03

#### Material data

Contact material	Copper alloy
Contact surface material	hard-silver plated

#### Certificates / Approvals



Certification

GOST, UL


#### Accessories

Item	Designation	Description
<b>Tools</b>		
1662735	CK4,0-EWZ	Contact removal tool, for rotated CK-4,0-... contacts
1205846	CRIMPFOX-4,0-ED-2,50	Crimping pliers, for CK 4.0... contacts, for conductor cross sections 1.5 - 2.5 mm <sup>2</sup>
1205859	CRIMPFOX-4,0-ED-6,00	Crimping pliers, for CK 4.0... contacts, for conductor cross sections 3.0 - 6.0 mm <sup>2</sup>

**Diagrams/Drawings**

Dimensioned drawing

---

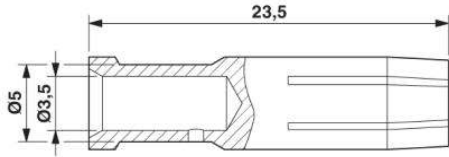

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;