



Electrical specifications

Center Frequency: 18070MHz
Ins. Loss @ Center Frequency: <=2.4dB
Passband: 16000-20140MHz
Passband Variation: <=1.2dB
VSWR Over Passband: <=1.6:1
Rejection: >=60dB@10070MHz
Rejection 2: >=60dB@24000MHz
Rejection 3: >=45dB@28000MHz
Impedance: 50Ω


Mechanical

Mounting Method: Drop-in
Dimensions: 1.22" x 0.32" x 0.58"

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

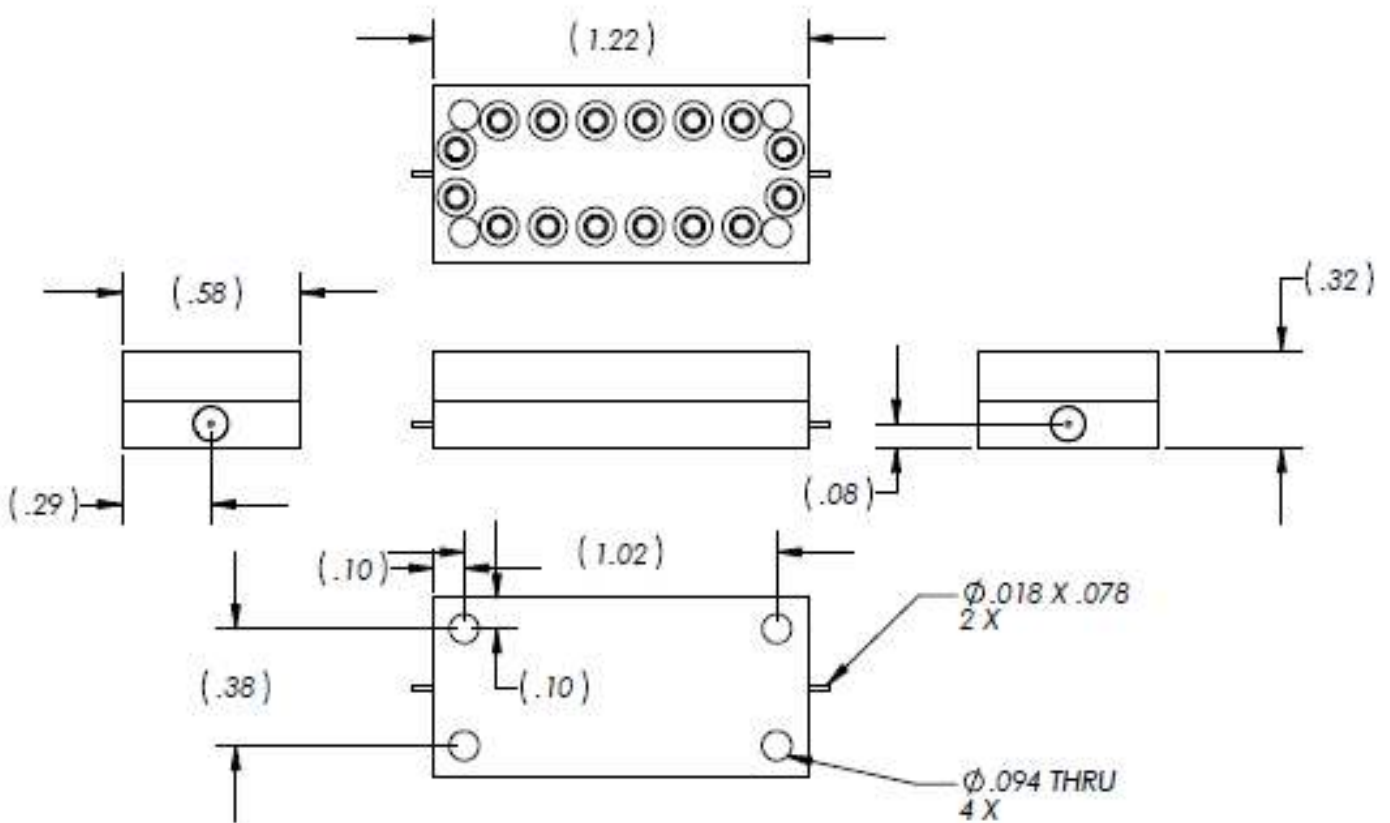



Plot:

