

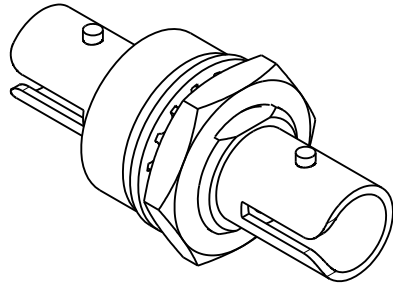
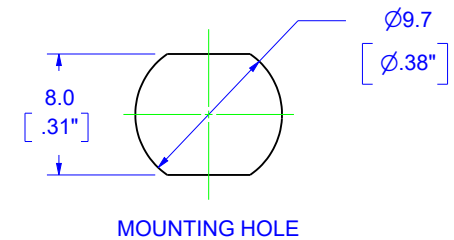


© COPYRIGHT 2021 BY INDUSTRIAL FIBER OPTICS, INC.  
ALL RIGHTS RESERVED.

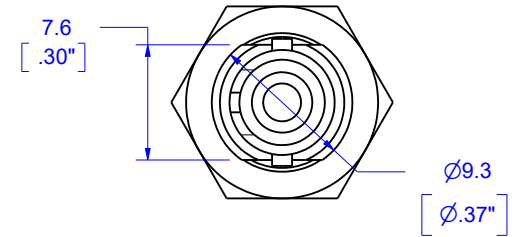

REVISIONS					
REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release		1/4/2013	BB	AR
B	Changed split sleeve specification from phosphor bronze	00390	3/23/2021	BB	DH

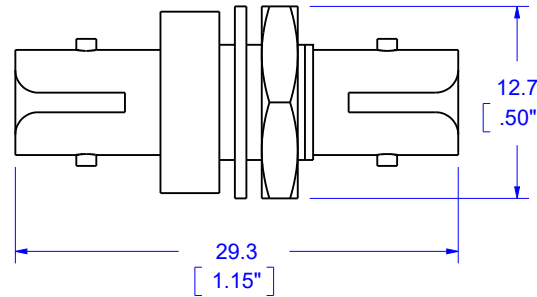


**NOTES:**

- 20° C to 60° C operating temperature.
- Suitable for mating any multimode ST terminations.
- Nickel plated brass body, washer and nut.
- Zirconia sleeve.
- Polyvinyl chloride (PVC) dust caps.
- TIA 604.2 (FOCIS 2) compatible.

California Proposition 65 Warning:  
This product contains lead, and may contain Bis(2-Ethylhexyl) phthalate (DEHP), Benzyl butyl phthalate (BBP), Dibutyl phthalate (DBP), and Diisobutyl phthalate (DIBP). These chemicals are listed by the California OEHHA and/or European Chemicals Agency as causing cancer, birth defects, or other reproductive harm.

This product is not EU RoHS or REACH compliant.



**METRIC**

INCLUDES HEX NUT, LOCK WASHER AND TWO (2) POLYVINYL CHLORIDE DUST CAPS

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	Industrial Fiber Optics TEMPE, AZ 85281			
	MATERIAL Brass				
DIMENSIONS ARE FOR REFERENCE ONLY NO TOLERANCES MAY BE IMPLIED FROM THIS DOCUMENT	FINISH Bright Nickel	NAME <b>ST Mating Sleeve</b>			
	DRAWN BY B. Bidwell	SIZE A	SCALE 1:1	DOCUMENT NUMBER IF 820063	REV B
	DATE 1/4/2013	DO NOT SCALE DRAWING		1 OF 1	
	CHECKED BY A. Reyes				
	DATE 1/4/2013				