




PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70230-X01/X01LF	1.6	2.90
70230-X11/X11LF	2.4	3.53

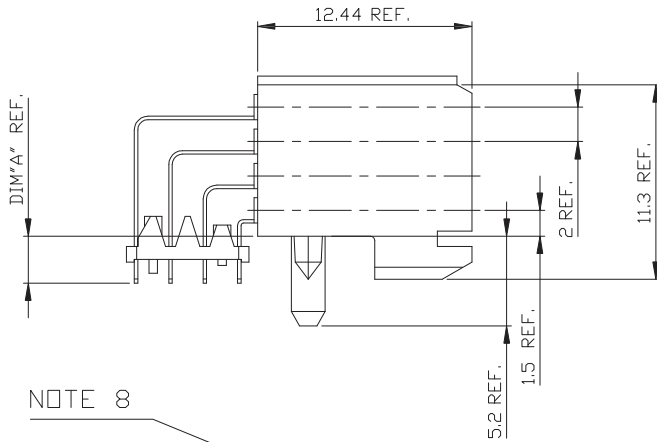


NOTE 8

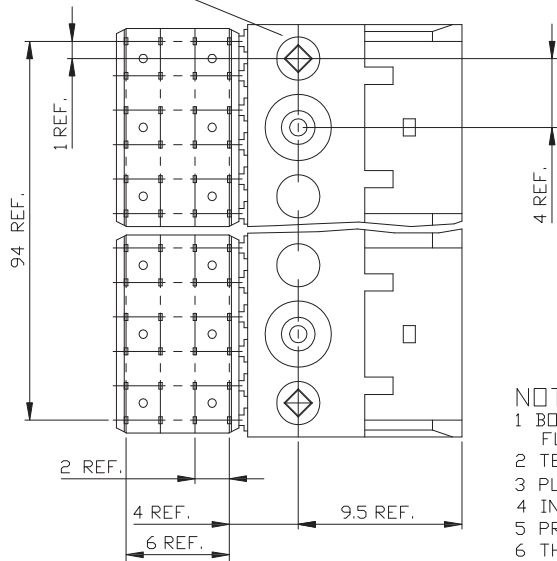

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

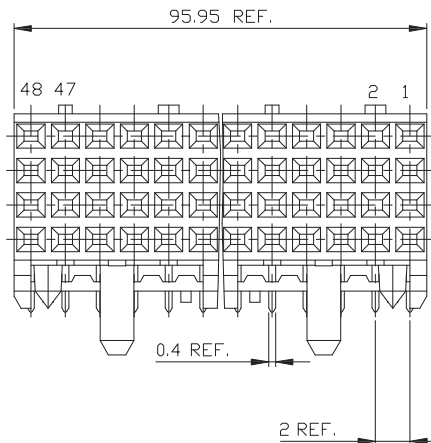


PRODUCT AFTER HOT RIVETTING.

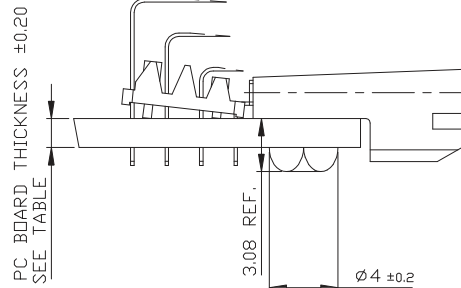

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 µm SnPb 90-97 OR 2-8 µm PURE Sn
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
- 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 8 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

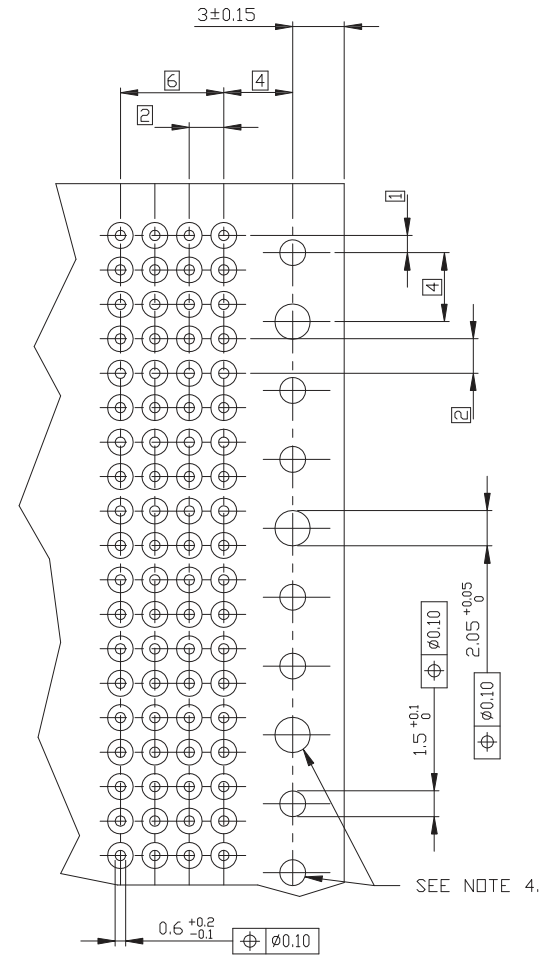

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.



mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		 <small>***fciconnect.com</small>	
l	tr	ec	n	ndr	date	linear	projection
K	0604-004	CLU	04221				
L	0606-0477	Cen	11/20/060				
M	0607-0168	Cen	05/10/07	angles			
N	0609-0068	Cen	06/06/09	dir	R.Trippe	900918	product family
				eng	H. Bouwknegt	940308	METRAL(tm)
H	V00578	LLA	000316	chr	A van Zanten	9000918	code
J	V00847	LLA	000530	app	van Voensel	900918	213
sheet	revision	N	N	N			scale
index	sheet	1	2	3			5:1
		product no		size		dwg no	
		A2		70230		sheet	
						1 of 3	







All rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor.
 Property of FCI bv.
 © FCI bv.

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
 Propriété de FCI bv.
 © FCI bv.

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70230-X02/X02LF	1.6	2.90
70230-X12/X12LF	2.4	3.53

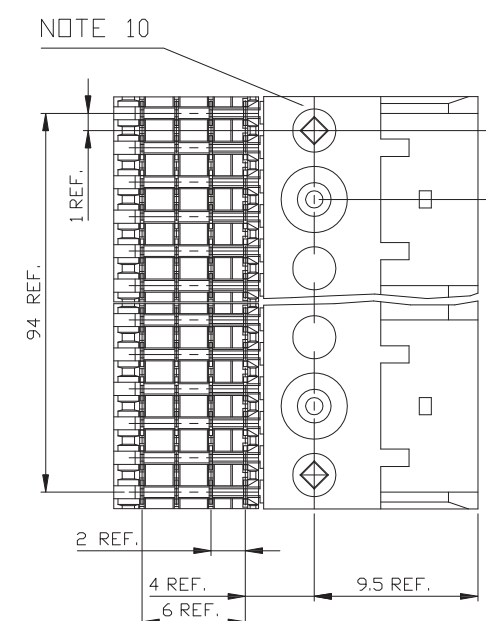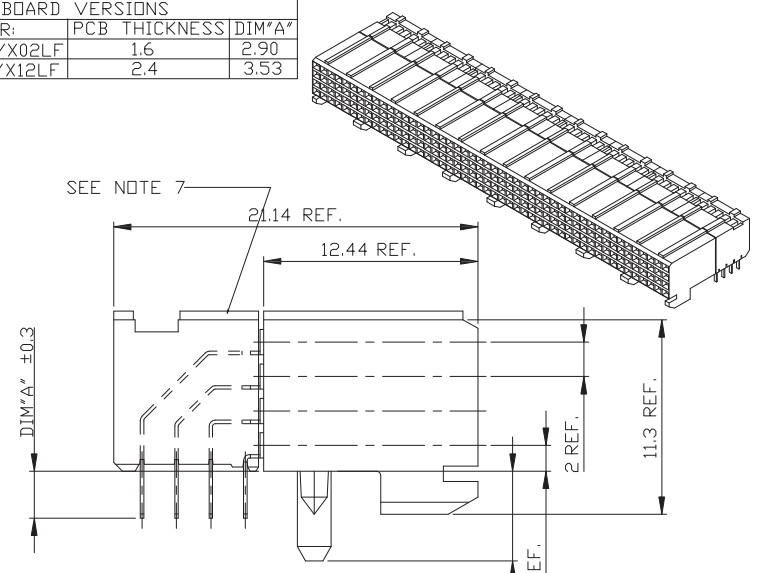

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

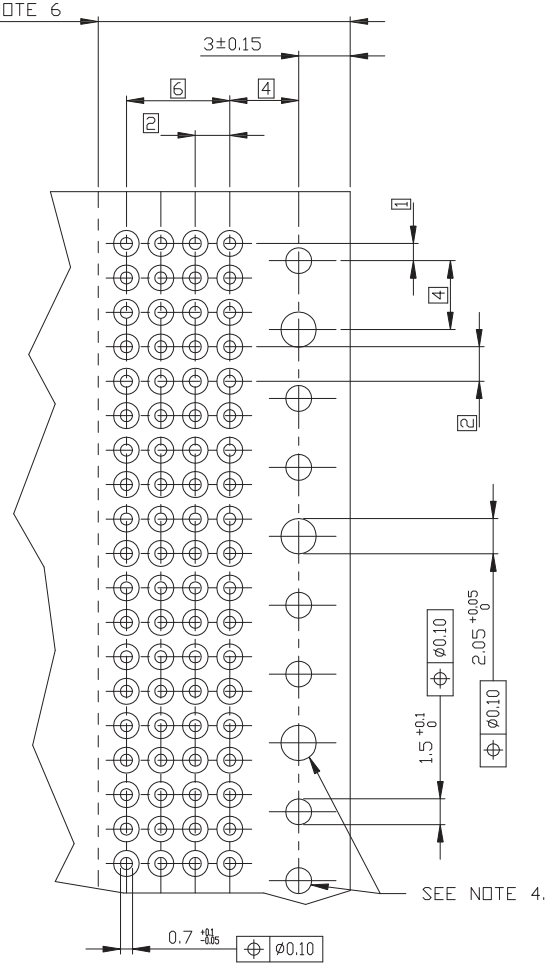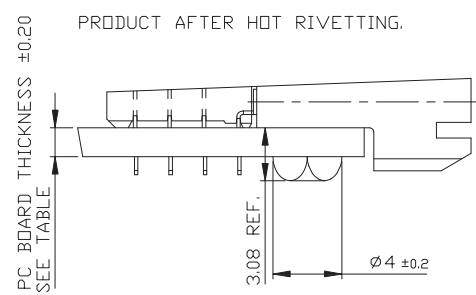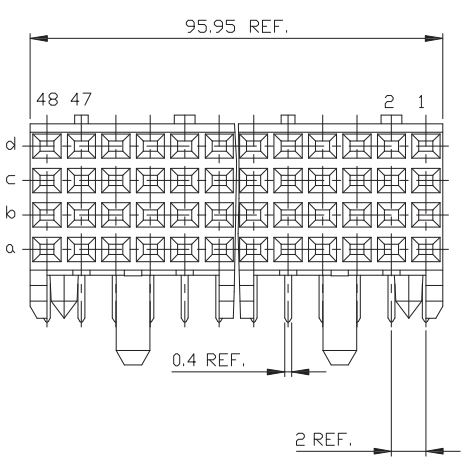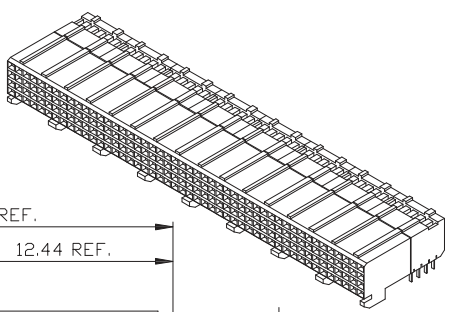

- NOTES:**
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - PLATING SOLDER TAILS 2-8 鍍 SnPb 90-97 OR 2-8 鍍 PURE Sn
 - INDICATED HOLES ARE UNPLATED.
 - PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - SET BACK FOR PRESS BLOCK.
 - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
 - DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.




mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
lit/elec nndr	date	linear	projection	title		RA FEMALE SIGNAL	
N		angles	mm	STB 96 mm VERSION		code	
		dir. D. de Bl 970529	mm	product family METRAL(trn)		213	
		engr. P. Schalk 970529	mm	size/dwg no		sheet	
		chr. P. Schalk 970529	5:1	A2 70230		2 of-	
		app. H. Cooljans 970529					
sheet index	revision	sheet					




all rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor.
 © FCI Inc.

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
 © FCI Inc.


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM "A"
70230-X03/X03LF	1.6	2.90
70230-X13/X13LF	2.4	3.53

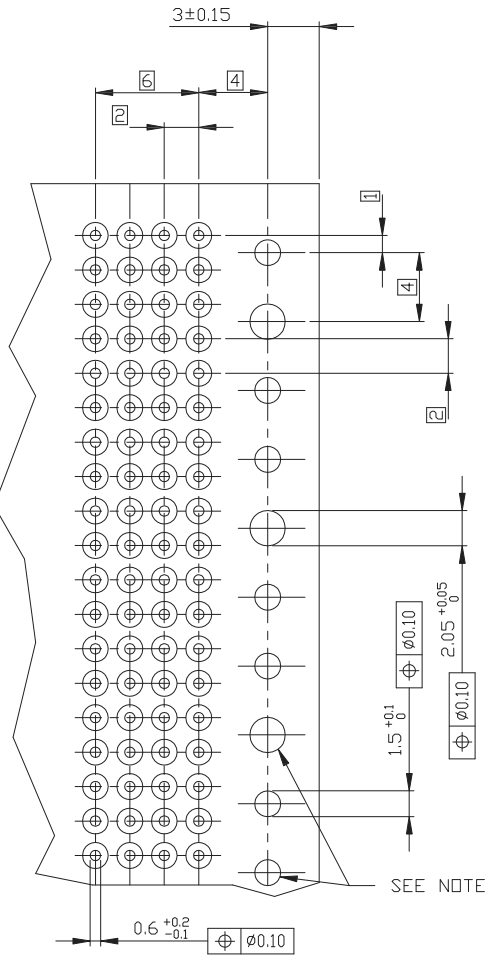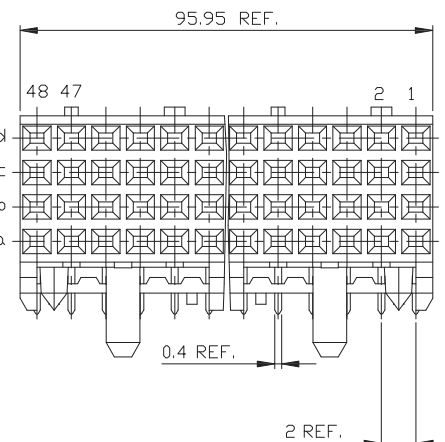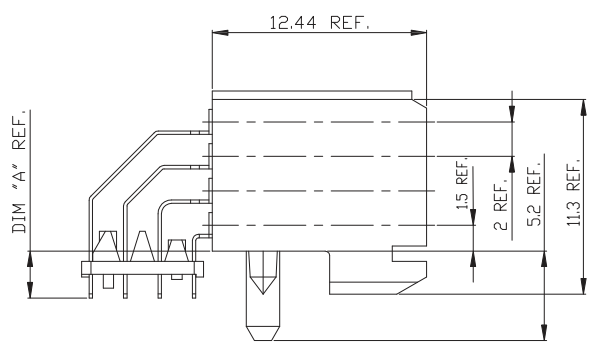

NOTE 11

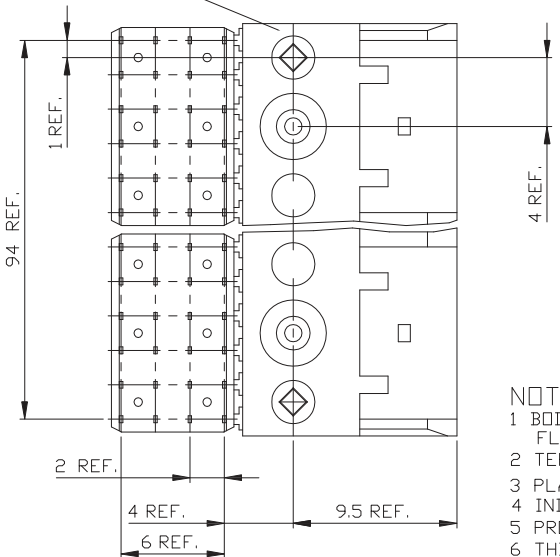

PRODUCT AFTER HOT RIVETTING.

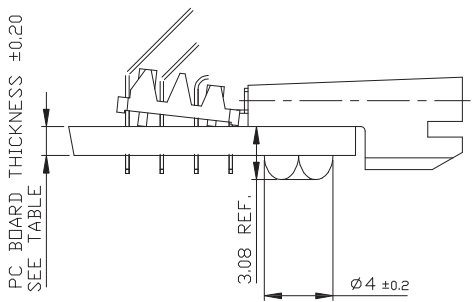

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 PLATING SOLDER TAILS 2-8 鍍 SnPb 90-97 OR 2-8 鍍 PURE Sn
 - 4 INDICATED HOLES ARE UNPLATED.
 - 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
 - 8 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
lit/elec nndr	date	linear		projection	title	RA FEMALE SIGNAL	code
N		angles		mm	STB 96 mm	VERSION	213
		dir	Heaven Cen 11/20/06	scale	product family	METRAL(tm)	sheet
		engr	Collins Lu 11/20/06	5:1	size/dwg no	70230	3 of-
		chr	Beer Fu 11/20/06				
		appd	Joseph Hsia 11/20/06				
sheet index	revision sheet						