

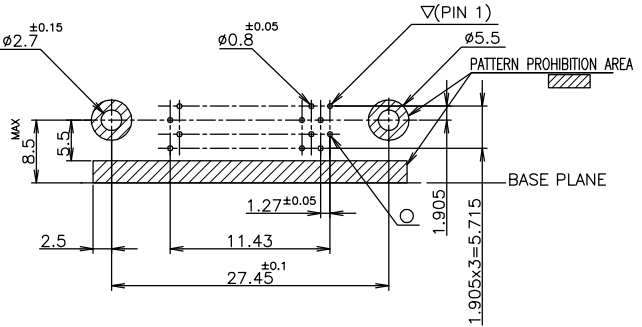


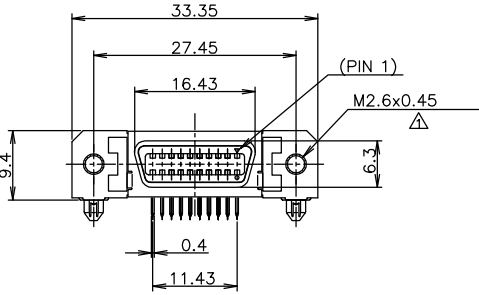
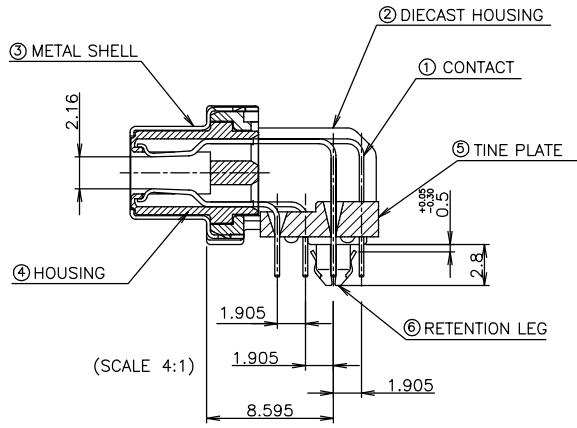


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
J	A	REVISED ECR-05-007904	29JUL05	C.Z	S.Y	

ITEM	MATERIAL	FINISH
①	COPPER ALLOY	NICKEL UNDER PLATE ALL OVER CONTACT AREA ; Au(0.0003) SOLDER TINE AREA ; TIN PLATE
②	ZINC	NICKEL PLATING
③	STEEL t0.25	NICKEL PLATE OVER COPPER UNDERPLATE
④	THERMO-PLASTIC	COLOR; BLACK
⑥	COPPER ALLOY	TIN PLATE OVER NICKEL UNDERPLATE

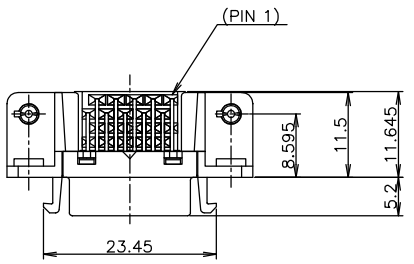

RECOMMENDED PC BOARD MOUNTING DIMMENSION COMPONENT SIDE

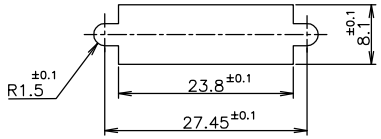

RECOMENDED PANEL CUTOUT THK, 2mm MAX

- △ RECOMMENDED SCREW SIZE ; M2.6 PANHEAD SCREW(L=5)
- 2 RECOMMENDED P.C BOARD THICKNESS ; 0.6~1.0 (REF)
- 3 INSERTION FORCE OF RETENTION LEG TO P.C.B; 21.56N(2.2kgf) MAX/CONNECTOR.
- 4 RETENTIVITY OF RETENTION LEG TO P.C.B; 4.9N(0.5kgf) MIN/CONNECTOR.

LEAD FREE

0.0003	20	5178240-2
Au P.LT.	POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN COREL WANG 31AUG04	Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: mm		CHK STEVEN YAO 31AUG04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JENOMOTO 31AUG04	PRODUCT SPEC	
0 PLC ± 0.2		108-60043		
1 PLC ± 0.2		APPLICATION SPEC		
2 PLC ± 0.2		SIZE		
3 PLC ± 0.2		CAGE CODE		
4 PLC ± 0.2		DRAWING NO		
ANGLES ± °		RESTRICTED TO		
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	A2	00779
CUSTOMER DRAWING		SCALE	2:1	SHEET 1 of 1
		REV	A	