
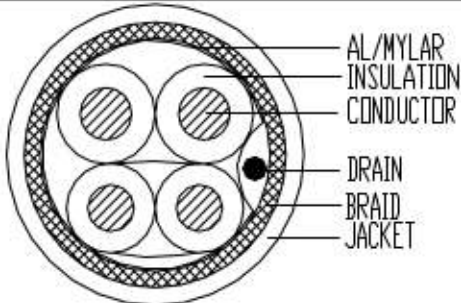


Part Number: 2725-2824-BE-01000-T

| STYLE | USB2.0 UL2725 28#/1P+24#/2C+AEB | | DOCUMENT NO. | VG0942016042902 |
|---|---------------------------------|---|---|-----------------|
| CONSTRUCTION ITEM | | 1P | | 2C |
| CONDUCTOR | SIZE | 28AWG | | 24AWG |
| | MATERIAL | TC | | TC |
| | CONSTRUCTION | 7/0.12±0.008mm | | 7/0.20±0.008mm |
| INSULATION | AVG. THICK | 0.22mm | | 0.24mm |
| | MIN. THICK | 0.15mm | | 0.17mm |
| | MATERIAL | HDPE | | SR-PVC |
| | DIAMETER | 0.85±0.05mm | | 1.00±0.05mm |
| SHIELDED | FILLET SHIELD | ----- | | |
| | AL/MYLAR MATERIAL | AL/MYLAR | | |
| | AL/MYLAR CONSTRUCTION | 12/0.02mm | | |
| | MYLAR MATERIAL | ----- | | |
| | MYLAR CONSTRUCTION | ----- | | |
| | DRAIN MATERIAL | TC | | |
| | DRAIN CONSTRUCTION | 7/0.12±0.008mm | | |
| | BRAID MATERIAL | TC | | |
| BRAID CONSTRUCTION | 16/4/0.12±0.008mm | | 7—8目 | |
| COVERED | AVG. THICK | ----- | | |
| | MIN. THICK | ----- | | |
| | MATERIAL | ----- | | |
| | DIAMETER | ----- | | |
| | COLOR | ----- | | |
| JACKET | AVG. THICK | 0.93mm | | |
| | MIN. THICK | 0.79mm | | |
| | MATERIAL | 65P UL-PVC ALL raw materials meet rohs standards | | |
| | DIAMETER | 4.5±0.15mm | | |
| | COLOR | IV-29# (HALF ATOMIZER) | | |
| MARKING | MARKING NO. 内容(513#) | USB HIGH SPEED CABLE 2.0 REVISION E189529  AWM 2725 28AWG/1PR AND 24AWG/2C 80°C 30V VW-1 | | |
| | COLOR | BLACK | | |
| CONSTRUCTION DRAWING & COLOR | | | | |
|  | | | 芯线颜色: 1P: WHITE, GREEN 2C: RED, BLACK | |
| ELECTRICAL CHARACTERISTICS | | | | |
| 1. Conductor Resistance: AT 20°C Max: A: 237.25 OHM/KM B: 93.25 OHM/KM 2. Insulation Resistance: AT 20°C Min: 10M Ω/KM 3. Dielectric Strength: AC500V 60HZ/分钟 | | | | |

制作: LYD
单位: 工程课
文件编号: VG-SOP-002

审核: 

核准: 

修订日期:
版次: C0

2016.04.29
页次: P1